

AERO STILL

SILENT & ENERGY SAVING

Features



- Wall and ceiling mounting
- Low energy consumption and noise level
- Easy maintenance
- Continuous operation
- Backdraft damper
- Ball bearing motor
- Available in Vintage plastic and with decorative chrome finish (Aero Still Chrome)
- 5 year warranty



Air flow:
up to 254 m³/h
71 l/s



Power:
from 5.5 W

SFP:
from 0.21 W/l/s



Noise level:
from 25 dBA



Chrome



Vintage


Options





Model	Aero Still 100/125/150					
	S	T	ST	H	SH	IR
Pull cord switch	•		•		•	
Timer		•	•	•	•	•
Humidity sensor				•	•	
Motion sensor						•

- **Timer**
 - Turn-off delay adjustable from 2 to 30 min.
- **Humidity sensor**
 - Humidity setpoint adjustable from 60 % up to 90 %.
- **Motion sensor**
 - Detection range from 1 up to 4 m.
 - Detection angle up to 100°.

Overall dimensions and mounting

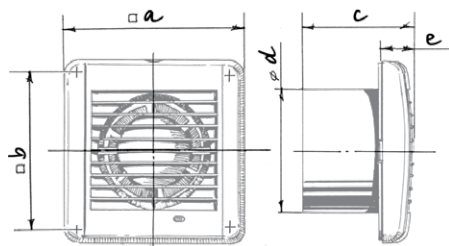


Dimensions [mm]	a	b	c	∅ d	e
Aero Still 100	144	122	92.5	100	29.5
Aero Still 125	168	144	97	125	30
Aero Still 150	198	170	119	150	30



Technical data

Model	Aero Still 100	Aero Still 125	Aero Still 150
Voltage [V/Hz]	220-240/50	220-240/50	220-240/50
Power [W]	5.5	9.4	19
Current [A]	0.035	0.059	0.14
Air flow [m ³ /h (l/s)]	84 (23)	158 (44)	254 (71)
SFP [W/l/s]	0.24	0.21	0.27
Sound pressure level [dBA]*	25	31	33

* Sound pressure level measured in free space at a distance of 3 meters from the fan.



Designation key

Aero	Still	Chrome	125	SH
Model	Silent	Colour	Spigot diameter	Option

Accessories

Duct system	Flexible air ducts	Grilles and hoods	Speed controllers	Clamps
BlauPlast	BlauFlex	Decor, GM	CDT E1.8 MCD 60/0.3	K, KZ