

BRAVO

CLASSIC MODELS

Features



- Wall and ceiling mounting
- Low noise impeller
- Easy maintenance
- Continuous operation
- Backdraft damper
- Ball bearing motor
- Available in chrome (Bravo Chrome) and platinum (Bravo Platinum) finish
- 5 year warranty



Air flow:
up to 305 m³/h
85 l/s



Power:
from 14 W
SFP:
from 0.28 W/l/s



Noise level:
from 35 dBA



Bravo 100



Chrome



Platinum


Options




Model	Bravo 100/125/150					
Option	S	T	ST	H	SH	IR
Pull cord switch	•		•		•	
Timer		•	•	•	•	
Humidity sensor				•	•	
Motion sensor						•

- **Timer**
 - Turn-off delay adjustable from 2 to 30 min.
- **Humidity sensor**
 - Humidity setpoint adjustable from 60 % up to 90 %.
- **Motion sensor**
 - Detection range from 1 up to 4 m.
 - Detection angle up to 100°.

Overall dimensions and mounting

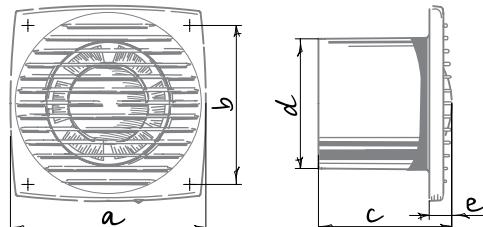

Dimensions [mm]	a	b	c	Ø d	e
Bravo 100	150	122	102	100	17
Bravo 125	176	144	104	125	17
Bravo 150	205	174	124	150	19



Designation key

Bravo	Chrome	100	S	(127-220V/60Hz)
Model	Colour	Spigot diameter	Option	Voltage

Accessories

Duct system	Flexible air ducts	Grilles and hoods	Speed controllers	Clamps
-------------	--------------------	-------------------	-------------------	--------



BlauPlast



BlauFlex



Decor, GM



CDT E1.8




MCD 60/0.3



K, KZ

* Sound pressure level measured in free space at a distance of 3 meters from the fan.

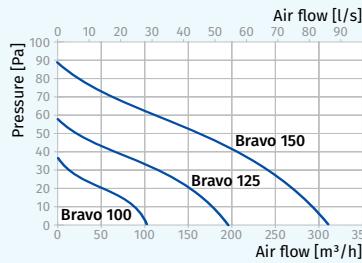

Model	Bravo 100 (127-220V/60Hz)	Bravo 125 (127-220V/60Hz)	Bravo 150 (127-220V/60Hz)
Voltage [V/Hz]	127/60	220/60	127/60
Power [W]	10	9	16
Current [A]	0.115	0.054	0.119
RPM [min ⁻¹]	2500	2500	2400
Air flow [m ³ /h (l/s)]	91 (25)	91 (25)	189 (53)
SFP [W/l/s]	0.4	0.36	0.3
Sound pressure level [dBA]*	33	33	34

* Sound pressure level measured in free space at a distance of 3 meters from the fan.

