

BRAVO STILL

SILENT & ENERGY SAVING

Features



- o Wall and ceiling mounting
- o Easy maintenance
- o Continuous operation
- o Backdraft damper
- o Ball bearing motor
- o Available in chrome (Bravo Still Chrome) and platinum (Bravo Still Platinum) finish
- o 5 year warranty



Air flow:
up to 235 m³/h
65 l/s



Power:
from 5.6 W
SFP:
from 0.29 W/l/s



Noise level:
from 26 dBA



Chrome



Platinum

Options



Model	Bravo Still 100/125/150					
	S	T	ST	H	SH	IR
Pull cord switch	•		•		•	
Timer		•	•	•	•	•
Humidity sensor				•	•	
Motion sensor						•

o Timer

- Turn-off delay adjustable from 2 to 30 min.


o Humidity sensor

- Humidity setpoint adjustable from 60 % up to 90 %.


o Motion sensor

- Detection range from 1 up to 4 m.
- Detection angle up to 100°.

Overall dimensions and mounting

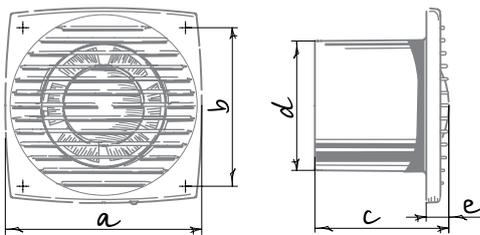


Dimensions [mm]	a	b	c	Ø d	e
Bravo Still 100	150	122	102	100	17
Bravo Still 125	176	144	104	125	17
Bravo Still 150	205	174	124	150	19



Technical data

Model	Bravo Still 100	Bravo Still 125	Bravo Still 150
Voltage [V/Hz]	220-240/50	220-240/50	220-240/50
Power [W]	5.6	9.3	20
Current [A]	0.04	0.006	0.13
Air flow [m ³ /h (l/s)]	70 (19)	115 (32)	235 (65)
SFP [W/l/s]	0.29	0.29	0.31
Sound pressure level [dBA]*	26	31	35

* Sound pressure level measured in free space at a distance of 3 meters from the fan.



Designation key

Bravo	Still	Chrome	100	S
Model	Low noise application	Colour	Spigot diameter	Option

Accessories

Duct system



BlauPlast

Flexible air ducts



BlauFlex

Grilles and hoods



Decor, GM

Speed controllers



CDT E1.8

MCD 60/0.3

Clamps



K, KZ