

DECO

CLASSIC MODELS

Features



- Wall and ceiling mounting
- Low noise impeller
- Easy maintenance
- Continuous operation
- Backdraft damper
- Ball bearing motor
- 5 year warranty



Air flow:
up to 298 m³/h
83 l/s



Power:
from 14 W
SFP:
from 0.29 W/l/s



Noise level:
from 37 dBA




Options




Model	Deco 100/125/150
Option	T
Timer	•

- Turn-off delay adjustable from 2 to 30 min.

Overall dimensions and mounting

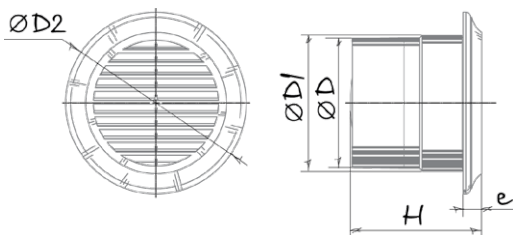


Dimensions [mm]	Ø D	Ø D1	Ø D2	H	e
Deco 100	99	100.4	140	128.5	14
Deco 125	123.5	128.6	165	133.5	14
Deco 150	149.5	154	188.5	145	14



Technical data

Model	Deco 100	Deco 125	Deco 150
Voltage [V/Hz]	220-240/50	220-240/50	220-240/50
Power [W]	14	16	24
Current [A]	0.085	0.1	0.13
RPM [min ⁻¹]	2300	2400	2400
Air flow [m ³ /h (l/s)]	105 (29)	185 (51)	298 (83)
SFP [W/l/s]	0.48	0.31	0.29
Sound pressure level [dBA]*	37	38	40

* Sound pressure level measured in free space at a distance of 3 meters from the fan.

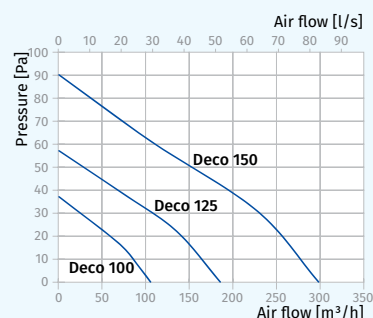

Designation key

Deco	125	T
Model	Spigot diameter	Option

Accessories

Duct system



BlauPlast

Flexible air ducts



BlauFlex

Grilles and hoods



Decor, GM

Speed controllers



CDT E1.8

MCD 60/0.3

Clamps



K, KZ