

KIT BRAVO-BW

HEAT MOVERS

Features



- For premises heated with chimneys and other heating systems.
- Provides hot air circulation from heated rooms to other premises.
- Installation into outer and dividing walls.
- Supplied with a thermostat (automatically switches the fan on at set temperature from 10 to 30 °C).
- Telescopic duct for wall installation.
- Continuous operation.
- Ball bearing motor.
- Easy maintenance.
- 5 year warranty.



Air flow:
70 m³/h
19 l/s



Power:
5.6 W



SFP:
0.29 W/l/s



Noise level:
26 dBA



KIT Bravo-BW 100/40-1



Fan
Bravo Still 100



Round telescopic duct
BlauPlast RTR 100



Round grille
Decor 100s



Thermostat
TS E10

KIT Bravo-BW 100/40-2



Fan
Bravo Still 100



Round telescopic duct
BlauPlast RTR 100






Square grille
Decor 140x140/100s



Thermostat
TS E10

Overall dimensions [mm] and mounting

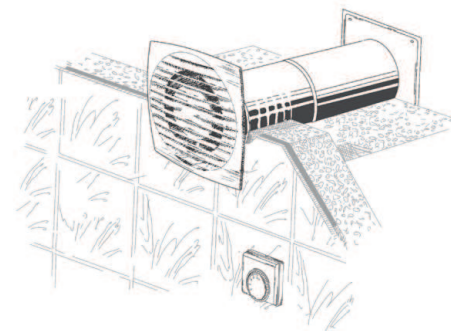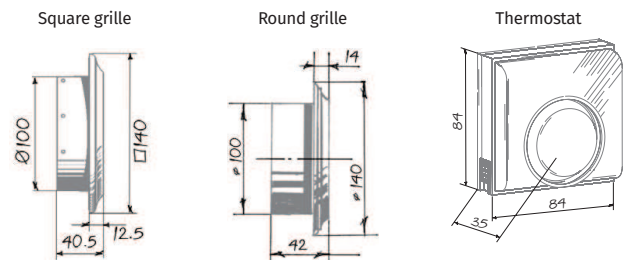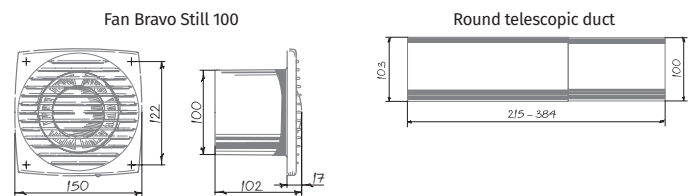

Technical data

Model	KIT Bravo-BW (Bravo Still 100)
Voltage [V/Hz]	220-240/50
Power [W]	5.6
Air flow [m ³ /h (l/s)]	70 (19)
SFP [W/l/s]	0.29
Sound pressure level [dBA]*	26

* Sound pressure level measured in free space at a distance of 3 meters from the fan.

