

QUATRO

WITH DECORATIVE FRONT PANEL

Features



- Wall and ceiling mounting.
- **Quatro (127-220V/60Hz)** series models are equipped with specially designed motors compatible with both 127 V and 220 V power mains.
- Easy maintenance.
- Low noise impeller.
- Continuous operation.
- Backdraft damper.
- Ball bearing motor.
- Available in aluminium (Quatro Hi-Tech) and chrome (Quatro Hi-Tech Chrome) finish.
- 5 year warranty.



Air flow:
up to 265 m³/h
74 l/s



Power:
from 14 W
SFP:
from 0.33 W/l/s



Noise level:
from 33 dBA



Hi-Tech Chrome



Hi-Tech




Options




| Model | Quatro 100/125/150 | | | | |
|------------------|--------------------|---|----|---|----|
| | S | T | ST | H | SH |
| Pull cord switch | • | | • | | • |
| Timer | | • | • | • | • |
| Humidity sensor | | | | • | • |

- Turn-off delay adjustable from 2 to 30 min.
- Humidity setpoint adjustable from 60 % up to 90 %.

Overall dimensions and mounting

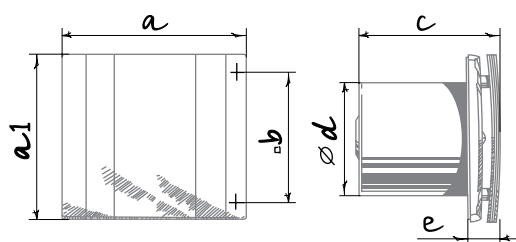

| Dimensions [mm] | a | a1 | b | c | Ø d | e |
|-----------------|-----|-----|-----|-----|-----|----|
| Quatro 100 | 171 | 151 | 108 | 128 | 100 | 32 |
| Quatro 125 | 201 | 178 | 113 | 136 | 125 | 35 |
| Quatro 150 | 236 | 207 | 165 | 157 | 150 | 38 |

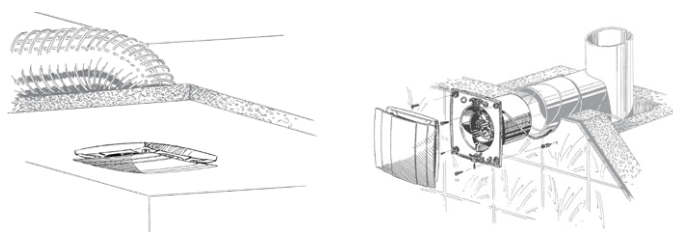


Designation key

| | | | | |
|--------|---------|-----------------|--------|-----------------|
| Quatro | Hi-Tech | 100 | S | (127-220V/60Hz) |
| Model | Colour | Spigot diameter | Option | Voltage |

Technical data


| Model | Quatro 100 | Quatro 125 | Quatro 150 |
|------------------------------------|------------|------------|------------|
| Voltage [V/Hz] | 220-240/50 | 220-240/50 | 220-240/50 |
| Power [W] | 14 | 16 | 24 |
| Current [A] | 0,085 | 0,1 | 0,13 |
| RPM [min ⁻¹] | 2300 | 2400 | 2400 |
| Air flow [m ³ /h (l/s)] | 88 (24) | 167 (46) | 265 (74) |
| SFP [W/l/s] | 0,57 | 0,34 | 0,33 |
| Sound pressure level [dBA]* | 33 | 34 | 37 |

* Sound pressure level measured in free space at a distance of 3 meters from the fan.

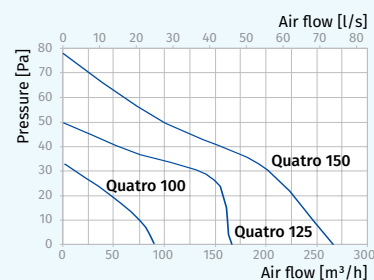

| Model | Quatro 100 (127-220V/60Hz) | | Quatro 125 (127-220V/60Hz) | | Quatro 150 (127-220V/60Hz) | |
|------------------------------------|----------------------------|---------|----------------------------|----------|----------------------------|----------|
| Voltage [V/Hz] | 127/60 | 220/60 | 127/60 | 220/60 | 127/60 | 220/60 |
| Power [W] | 10 | 9 | 16 | 15 | 25 | 25 |
| Current [A] | 0,115 | 0,054 | 0,119 | 0,102 | 0,175 | 0,338 |
| RPM [min ⁻¹] | 2500 | 2500 | 2400 | 2400 | 2350 | 2350 |
| Air flow [m ³ /h (l/s)] | 82 (23) | 82 (23) | 170 (47) | 170 (47) | 240 (67) | 240 (67) |
| SFP [W/l/s] | 0,44 | 0,40 | 0,34 | 0,32 | 0,37 | 0,37 |
| Sound pressure level [dBA]* | 33 | 33 | 35 | 35 | 37 | 37 |

* Sound pressure level measured in free space at a distance of 3 meters from the fan.

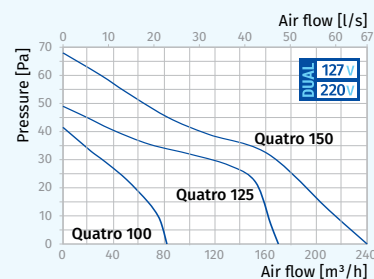

Accessories

| Duct system | Flexible air ducts | Grilles and hoods | Speed controllers | Clamps |
|-------------|--------------------|-------------------|-------------------|------------|
| | | | | |
| BlauPlast | BlauFlex | Decor, GM | CDT E1.8 | MCD 60/0.3 |