

# SILEO V2

SILENT & ENERGY SAVING

## Features



- The specially designed mixed-flow impeller profile ensures high air flow and low noise level.
- The casing and the impeller are made of quality durable UV-resistant plastic.
- The fan is equipped with a backdraft damper for back flow prevention.
- The high ingress protection rating of IP45 makes the fan the ideal solution for the ventilation of bathrooms and shower rooms.
- The motor is mounted on special anti-vibration dampers.
- The exhaust pipe incorporates a specially designed air rectifier to reduce the air turbulence, increase pressure and lower the noise level.
- Ideal for intermittent or continuous ventilation.



**Air flow:**  
up to 170 m<sup>3</sup>/h  
47 l/s



**Power:**  
from 4.5 W  
**SFP:**  
from 0.24 W/l/s



**Noise level:**  
from 22 dBA




## Options



Model	Sileo V2 100/125		
Option	S	T	H
Pull cord switch	•		
Interval timer		•	
Turn-on delay timer		•	•
Turn-off delay timer		•	•
Humidity sensor			•

- **Turn-on delay timer**
  - Fixed turn-on delay time of 60 sec.
- **Turn-off delay timer**
  - Adjustable delay from 2 to 30 min.
- **Interval timer**
  - If the interval timer is enabled, the fan will turn on automatically each 6, 12 or 24 hours and it will operate from 2 to 30 min, depending on the turn-off delay timer setting.
- **Humidity sensor**
  - Humidity setpoint adjustable from 60 % up to 90 %.

## Overall dimensions

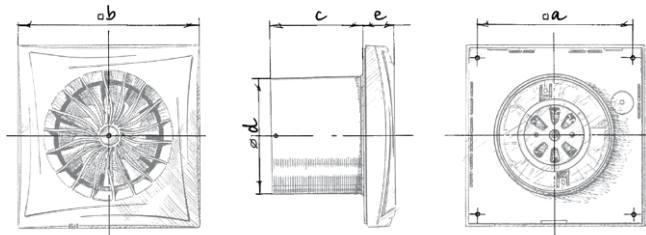



Dimensions [mm]	a	b	c	Ø d	e
Sileo V2 100	136	158	81	100	26
Sileo V2 125	168	182	91	124	27

Designation key			
Sileo	V2	125	H
Model	Two-speed motor	Spigot diameter	Option

## Technical data

Model	Sileo V2 100		Sileo V2 125	
	min	max	min	max
Speed				
Voltage [V/Hz]	220-240/50(60)			
Power [W]	4.5	7	9.5	13.5
Current [A]	0.029	0.052	0.065	0.09
RPM [min <sup>-1</sup> ]	1850	2400	1800	2250
Air flow [m <sup>3</sup> /h (l/s)]	60 (17)	90 (25)	145 (40)	170 (47)
SFP [W/l/s]	0.27	0.28	0.24	0.29
Sound pressure level [dBA]*	22	25	28	32

\* Sound pressure level measured in free space at a distance of 3 meters from the fan.

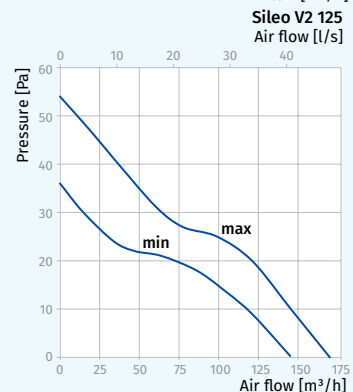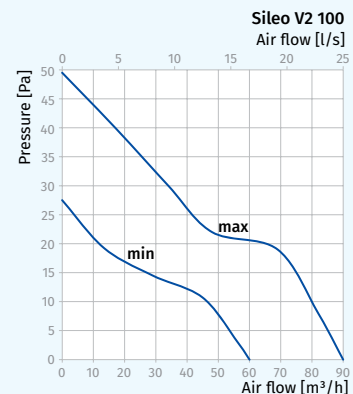

Accessories	Flexible air ducts	Grilles and hoods	Speed controllers	Clamps
BlauPlast	BlauFlex	Decor, GM	CDP-2/10	K, KZ