

# WIND

# WINDOW FANS

## Features



- Window mounting
- Low noise impeller
- Easy maintenance
- Ball bearing motor
- Continuous operation
- Automatic shutters
- 5 year warranty



**Air flow:**  
up to 295 m<sup>3</sup>/h  
82 l/s



**Power:**  
from 22 W  
**SFP:**  
from 0.32 W/l/s



**Noise level:**  
from 35 dBA




## Options




Model	Wind 125/150					
Option	S	T	ST	H	SH	IR
Pull cord switch	•		•		•	
Timer		•	•	•	•	•
Humidity sensor				•	•	
Motion sensor						•

- Timer**
  - Turn-off delay adjustable from 2 to 30 min.
- Humidity sensor**
  - Humidity setpoint adjustable from 60 % up to 90 %.
- Motion sensor**
  - Detection range from 1 up to 4 m.
  - Detection angle up to 100°.

## Overall dimensions and mounting

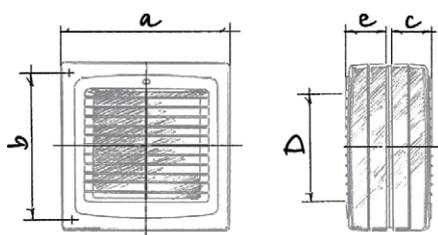


Dimensions [mm]	a	b	e	c	D
Wind 125	186	173	60	53	125
Wind 150	210	195	66	60	150

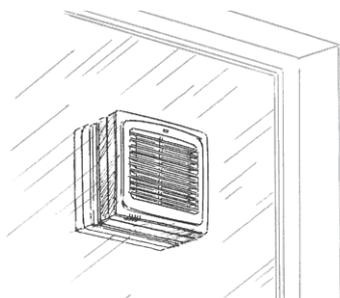

## Technical data

Model	Wind 125	Wind 150
Voltage [V/Hz]	220-240/50	220-240/50
Power [W]	22	26
Current [A]	0.1	0.13
RPM [min <sup>-1</sup> ]	2400	2400
Air flow [m <sup>3</sup> /h (l/s)]	185 (51)	295 (82)
SFP [W/l/s]	0.43	0.32
Sound pressure level [dBA]*	35	41

\* Sound pressure level measured in free space at a distance of 3 meters from the fan.

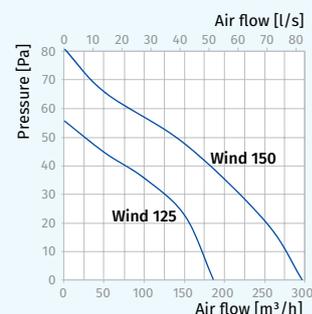

### Designation key

Wind	125	ST
Model	Spigot diameter	Option

## Accessories

### Speed controllers



CDT E1.8



MCD 60/0.3