

BLAUAIR RV

FLOOR MOUNTED HEAT RECOVERY UNITS



FEATURES

High-efficiency rotary heat exchanger available in two types: condensing (aluminium) and enthalpy.

High-efficient EC fans, backward-curved, external rotor. Integrated plug-and-play controls.

Web interface, MODBUS, outputs for optional electric/water heater or water/freon cooler.

Complete set of accessories: silencers, economizers, VAV, CAV, etc.


Operation by RH/CO₂/temperature/constant pressure/timer schedule.

Best suited for: applications in residential, commercial, and public buildings where outdoor installation is not feasible, including offices, educational institutions, and facilities with restricted installation space. Designed for indoor installation.



Sizes and capacities of BL and BLS Compact units

Unit size

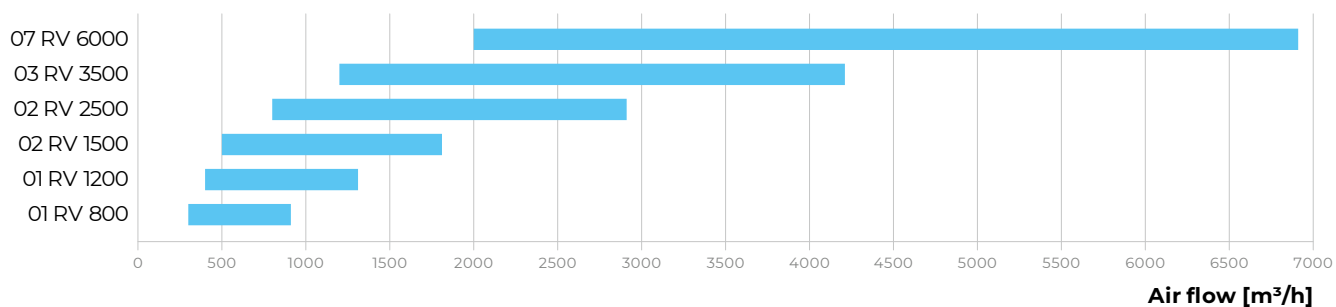

External pressure drop – 200 Pa

Connection dimensions [mm]

Unit size	01 RV 800	01 RV 1200	02 RV 1500	02 RV 2500	03 RV 3500	07 RV 6000
Width × Height	Ø 250	Ø 250	500×250	500×250	600×300	1000×350