



Auto 125 SH


Extract fans

- Maximum airflow: 185
- Sound pressure level LpA at 3 m: 35
- Motor type: AC
- Pull cord
- Humidity sensor
- Timer: Turn off timer

| | Unit of measurement | Auto 125 SH |
|---------------------------------|---------------------|-------------|
| Connected air duct size | mm | 125 |
| Speed | - | 1 |
| Minimum supply voltage | V | 220 |
| Maximum supply voltage | V | 240 |
| Power supply frequency | Hz | 50 |
| Rated power | W | 22 |
| Unit current | A | 0.1 |
| Maximum airflow | m ³ /h | 185 |
| Sound pressure level LpA at 3 m | dB(A) | 35 |
| Ingress protection rating | - | IP24 |

Dimensions

| a | b1 | b2 | b3 | c | Ø d | e |
|-----|-----|-----|-----|----|-----|----|
| 186 | 128 | 173 | 174 | 98 | 125 | 33 |

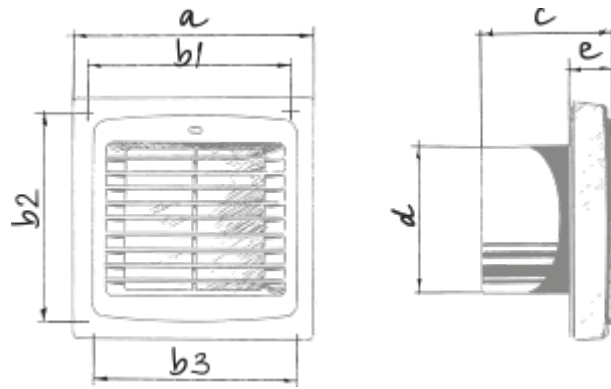

Ecodesign



| | | | | | | |
|---|----------------|---|---------|---|------|---|
| Trademark | Blauberg | | | | | |
| Model | Auto 125 SH | | | | | |
| Specific energy consumption (SEC) (kWh/(m ² /a)) | Cold | | Average | | Warm | |
| | 0 | B | 0 | E | 0 | F |
| Type of ventilation unit | Unidirectional | | | | | |
| Type of drive installed | Multi-speed | | | | | |
| Type of heat recovery system | None | | | | | |
| Maximum flow rate (m ³ /h) | 0 | | | | | |
| Electric power input (W) | 0 | | | | | |
| Reference flow rate (m ³ /s) | 0 | | | | | |
| Specific power input (SPI) (W/(m ³ /h)) | 0 | | | | | |
| Control typology | Manual control | | | | | |
| Maximum external leakage rates (%) | 0 | | | | | |
| Sound power level (dB(A)) | 0 | | | | | |
| Declared typology | RVU UVU | | | | | |
| The annual electricity consumption (AEC) (kWh/a) | Cold | | Average | | Warm | |
| | 0 | | 0 | | 0 | |
| The annual heating saved (AHS) (kWh/a) | Cold | | Average | | Warm | |
| | 0 | | 0 | | 0 | |