




# BLAUBOX DE 1300-12 Pro

Supply suspended ventilation units


- Power of electrical reheater: 12000
- Maximum airflow: 1275
- Sound pressure level LpA at 3 m: 51
- Sound insulation
- Motor type: AC
- Reheater: Electric
- Control: Remote Control
- Casing material: Galvanized steel

	Unit of measurement	BLAUBOX DE 1300-12 Pro
Connected air duct size	mm	400x200
Speed	-	1
Minimum supply voltage	V	400
Maximum supply voltage	V	400
Power supply frequency	Hz	50
Rated power	W	320
Power of electrical reheater	W	12000
Unit current	A	18
Maximum airflow	m <sup>3</sup> /h	1275
Sound pressure level LpA at 3 m	dB(A)	51
Weight	kg	56
Transported air temperature (max)	°C	55
Transported air temperature (min)	°C	-25
Ambient air temperature min	°C	-25
Ambient air temperature max	°C	55
Ambient air humidity max	%	80
Ingress protection rating	-	IP22
Ingress protection rating of the drive	-	IP44

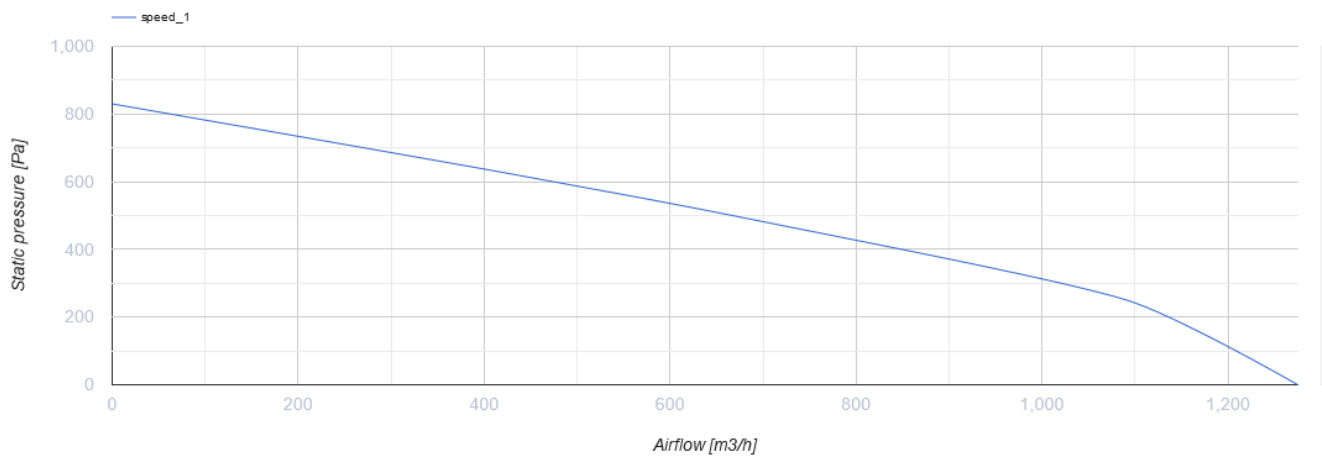

## Dimensions

B	B1	B2	B3	H	H1	H2	L	L1
400	420	624	582	200	220	374	1145	1106

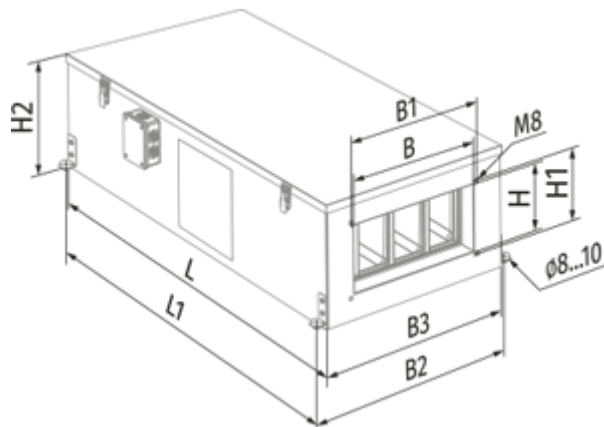

## Accessories

### Other accessories



Name	Photo	Description
FP 442x275x47 G4		G4 panel filter

### Other accessories



Name	Photo	Description
------	-------	-------------

<a href="#">SD 40x20</a>		Silencers for rectangular ducts
--------------------------	---	---------------------------------

### Other accessories

Name	Photo	Description
<a href="#">KFK 40x20-3</a>		Duct DX cooling units for rectangular air ducts
<a href="#">KWK 40x20-3</a>		Duct water cooling units for rectangular air ducts

### Other accessories

Name	Photo	Description
<a href="#">SL 40x20</a>		Air dampers for rectangular ducts
<a href="#">EVA 40x20</a>		Flexible anti-vibration connectors for rectangular ducts