




BLAUBOX DW 1200-4 Pro

Supply suspended ventilation units


- Maximum airflow: 1200
- Sound pressure level LpA at 3 m: 51
- Sound insulation
- Motor type: AC
- Reheater: Water
- Control: Remote Control
- Casing material: Galvanized steel

	Unit of measurement	BLAUBOX DW 1200-4 Pro
Connected air duct size	mm	400x200
Speed	-	1
Minimum supply voltage	V	400
Maximum supply voltage	V	400
Power supply frequency	Hz	50
Rated power	W	320
Unit current	A	0.55
Maximum airflow	m ³ /h	1200
Sound pressure level LpA at 3 m	dB(A)	51
Weight	kg	57
Transported air temperature (max)	°C	55
Transported air temperature (min)	°C	-25
Ambient air temperature min	°C	-25
Ambient air temperature max	°C	55
Ambient air humidity max	%	80
Ingress protection rating	-	IP22
Ingress protection rating of the drive	-	IP44

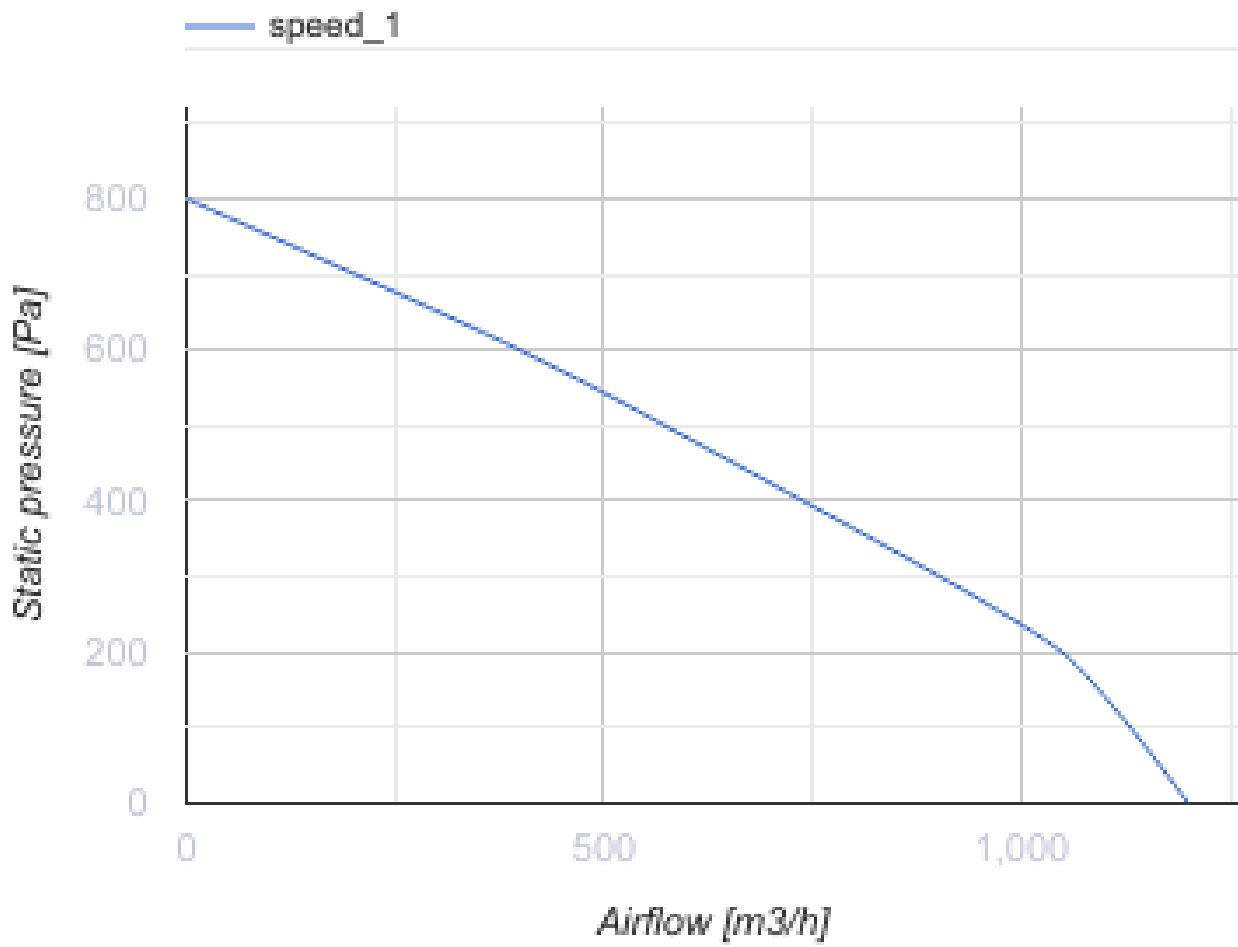

Dimensions

B	B1	B2	B3	H	H1	H2	L	L1
400	420	624	582	200	220	374	1145	1106

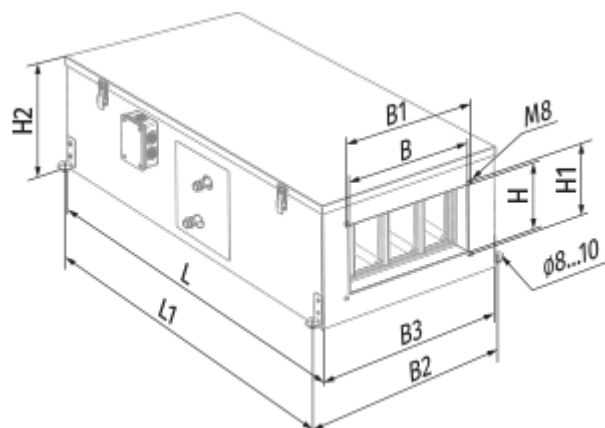


Accessories










Other accessories




Name	Photo	Description
FPT 538x342x27 G4		

Other accessories



Name	Photo	Description
SD 40x20		Silencers for rectangular ducts

Other accessories

Name	Photo	Description
KFK 40x20-3		Duct DX cooling units for rectangular air ducts
KWK 40x20-3		Duct water cooling units for rectangular air ducts
WMG 3/4-4		Water mixing units
WMG 3/4-6		Water mixing units
WMG 1-6		Water mixing units
WMG 1-10		Water mixing units
WMG 1 1/4-10		Water mixing units
WMG 1 1/4-16		Water mixing units
WMG 1 1/2-16		Water mixing units

WMG 1 1/2-25		Water mixing units
WMG 2-25		Water mixing units
WMG 2-40		Water mixing units

Other accessories

Name	Photo	Description
SL 40x20		Air dampers for rectangular ducts
EVA 40x20		Flexible anti-vibration connectors for rectangular ducts