





Box 50x30 4E

Centrifugal inline fans with backward curved blades

- Sound pressure level LpA at 3 m: 53
- Impeller type: Centrifugal impeller with backward curved blades
- Casing material: Galvanized steel
- Installation in any position


	Unit of measurement	Box 50x30 4E
Connected air duct size	mm	500x300
Phases	-	1
Minimum supply voltage	V	220
Maximum supply voltage	V	240
Power supply frequency	Hz	50/60
Rated power	W	140
Unit current	A	0.57
Maximum airflow	m ³ /h	1700
Rotation speed at 50hz	-	1390
Sound pressure level LpA at 3 m	dB(A)	53
Weight	kg	19.8
Transported air temperature (max)	°C	45
Transported air temperature (min)	°C	-25
Ingress protection rating	-	IPX4
Ingress protection rating of the drive	-	IP44
Impeller material	-	Aluminium
Article	-	8013829

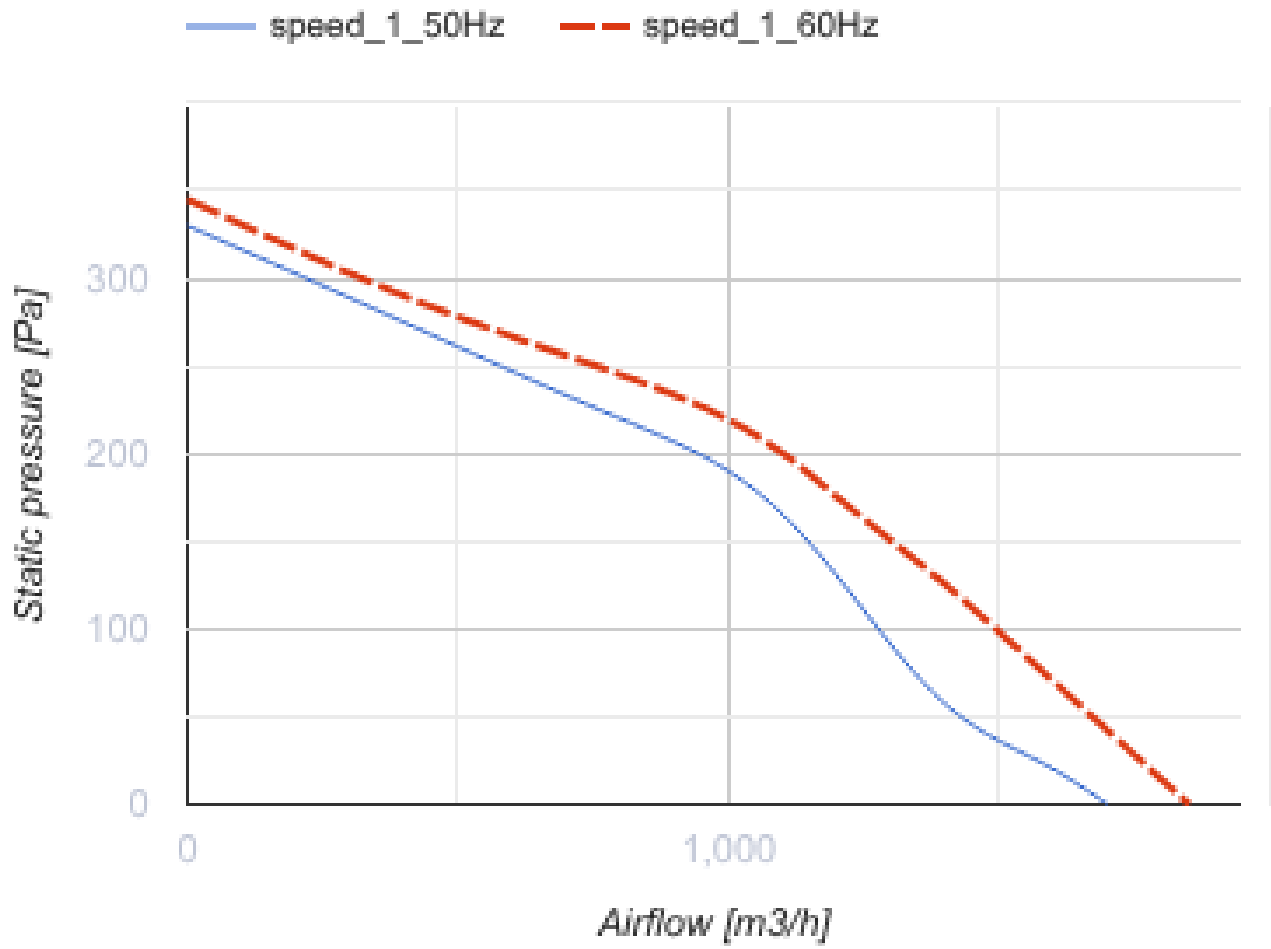

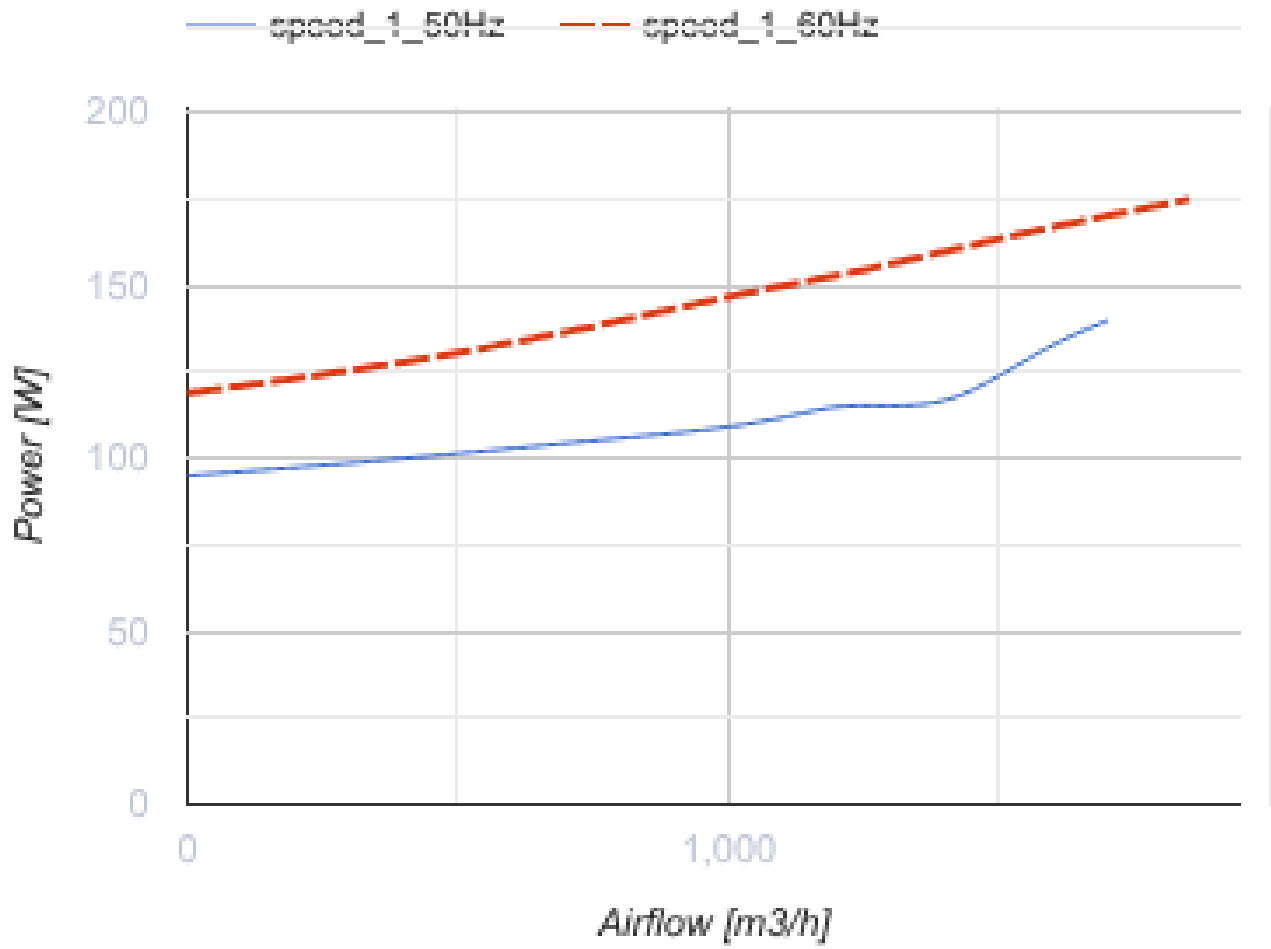

Dimensions

B	B1	H	H1	H2	L
500	540	300	340	340	680

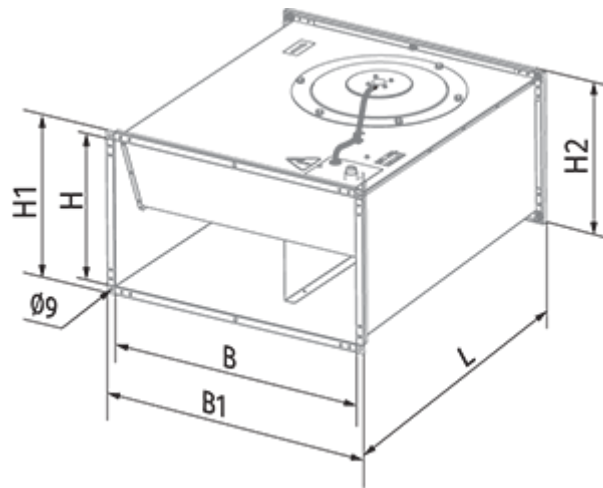

Ecodesign

Trademark	Blauberg
Model	Box 50x30 4E
Type of ventilation unit	Unidirectional
Type of drive installed	External MSD or VSD
Type of heat recovery system	None
Nominal external pressure (Pa)	200
Maximum external leakage rates (%)	2.7
Static efficiency (%)	49.7
Declared typology	NRVU UVU
Effective electric power input (kW)	0.107
Sound power level (dB(A))	73