



Box-R 125 V2


Inline centrifugal fans

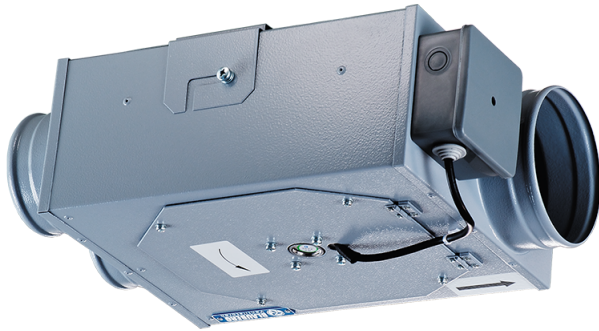

- Maximum airflow: 300
- Sound pressure level LpA at 3 m: 45
- Motor type: AC
- Impeller type: Centrifugal backward curved blades
- Casing material: Coated steel
- Installation in any position


	Unit of measurement	Box-R 125 V2	
Connected air duct size	mm	125	
Speed	-	2	
Minimum supply voltage	V	230	
Maximum supply voltage	V	230	
Power supply frequency	Hz	50	
Rated power	W	42	48
Unit current	A	0.18	0.22
Maximum airflow	m ³ /h	220	300
Sound pressure level LpA at 3 m	dB(A)	39	45
Weight	kg	6	
Transported air temperature (max)	°C	50	
Ingress protection rating	-	IPX4	
Ingress protection rating of the drive	-	IP44	

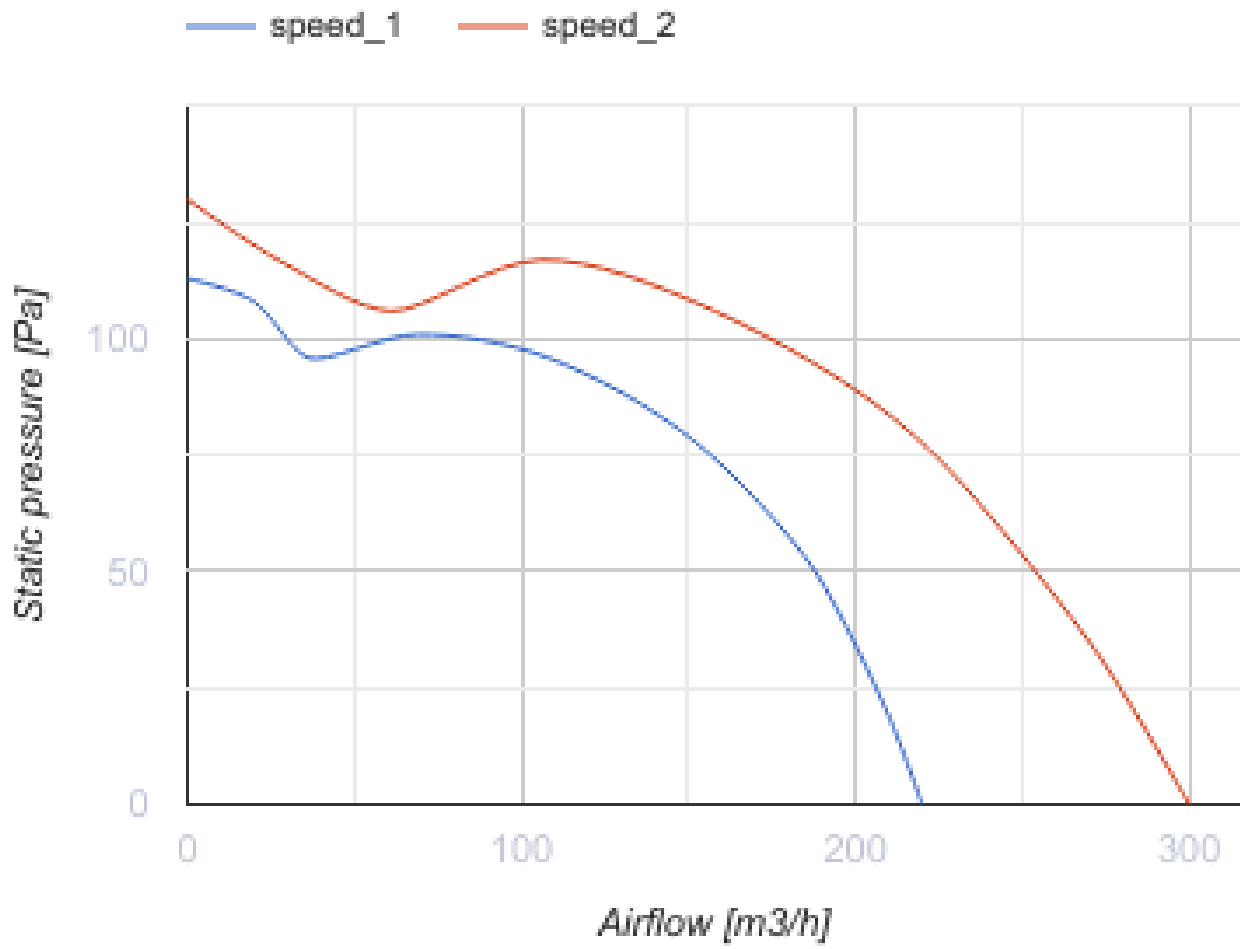

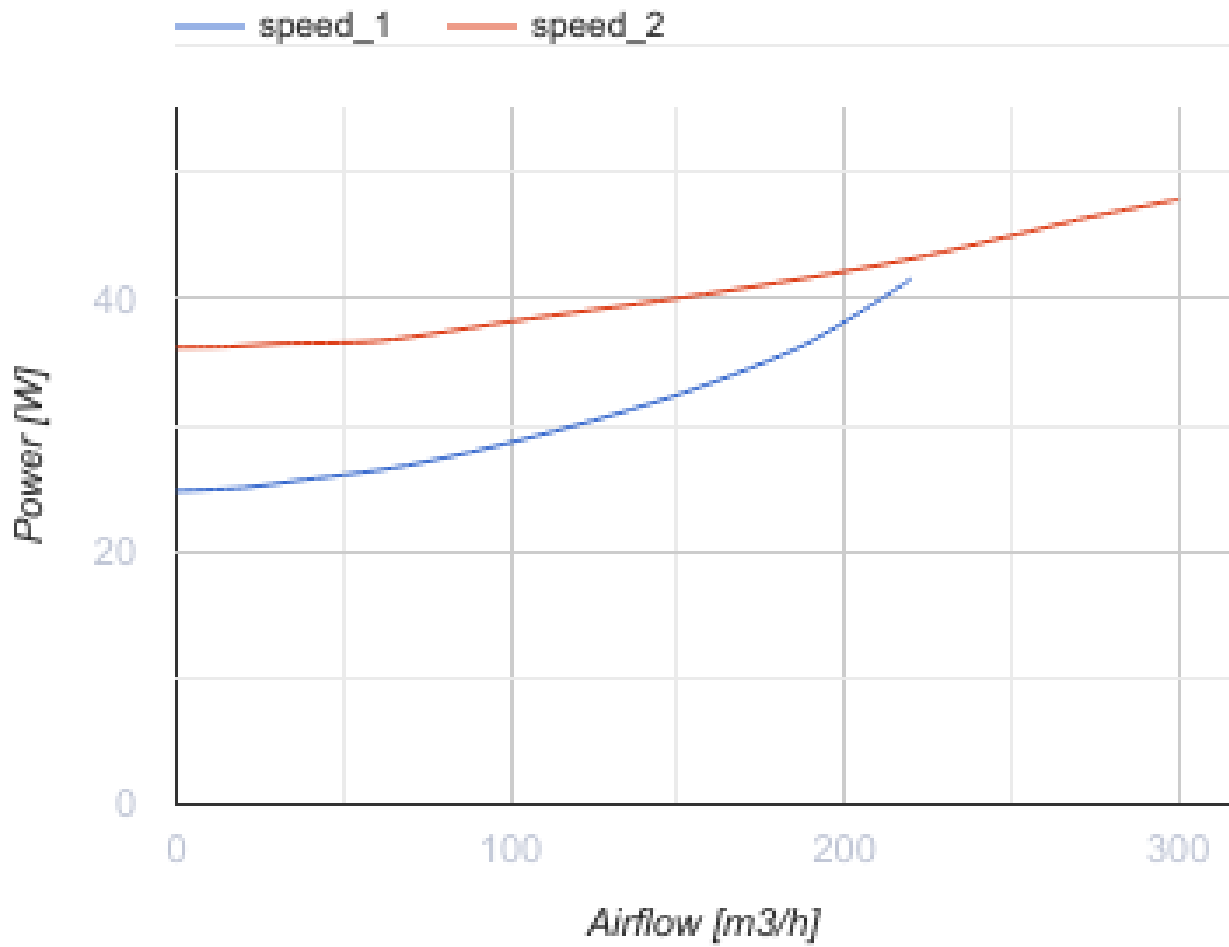


Dimensions

ØD	ØD1	B	H	L	L2
124	124	303	152	430	330

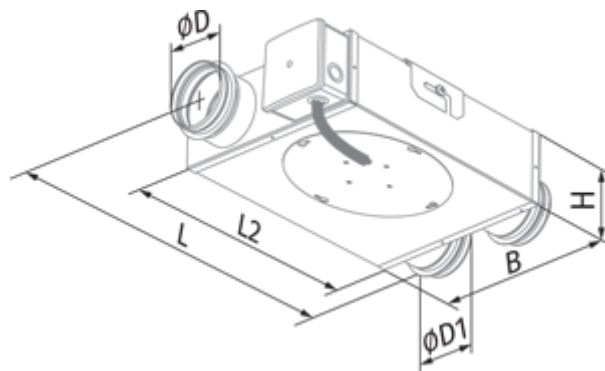

Ecodesign

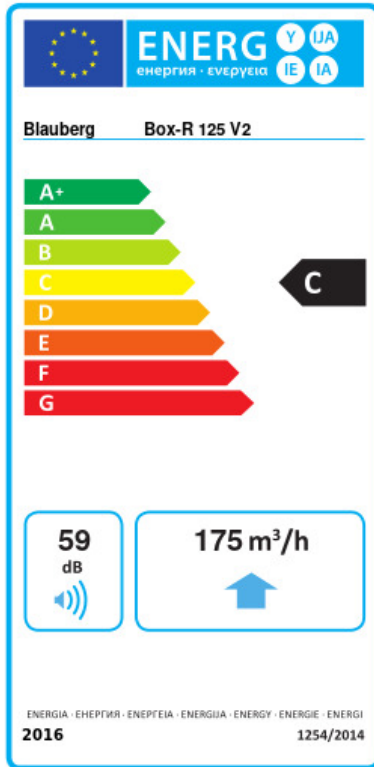

Trademark	Blaubeerg					
Model	Box-R 125 V2					
Specific energy consumption (SEC) (kWh/(m ² /a))	Cold		Average		Warm	
	-52	A+	-25	C	-9.4	F
Type of ventilation unit	Unidirectional					
Type of drive installed	Variable speed					
Type of heat recovery system	None					
Maximum flow rate (m ³ /h)	175					
Electric power input (W)	43					
Reference flow rate (m ³ /s)	0.034					
Reference pressure difference (Pa)	50					
Specific power input (SPI) (W/(m ³ /h))	0.253					
Control typology	Local demand control					
Maximum external leakage rates (%)	2.7					
Sound power level (dB(A))	59					
Declared typology	RVU UVU					
The annual electricity consumption (AEC) (kWh/a)	Cold		Average		Warm	
	134		134		134	
The annual heating saved (AHS) (kWh/a)	Cold		Average		Warm	
	5536		2830		1280	


Accessories

Temperature controllers





Name	Photo	Description
MLCD E2		Room temperature regulator

Speed control switches

Name	Photo	Description
CDP-2/5		Multi-speed switch

CDP-3/5		Multi-speed switch
-------------------------	---	--------------------

Humidity sensors

Name	Photo	Description
TE / TI 1.5		Timers
HSE / HSI 1.5		Sensors
LSE / LSI 1.5		Sensors
IRSE / IRSI 1.5		Sensors