



Box-R 80 V3

Inline centrifugal fans

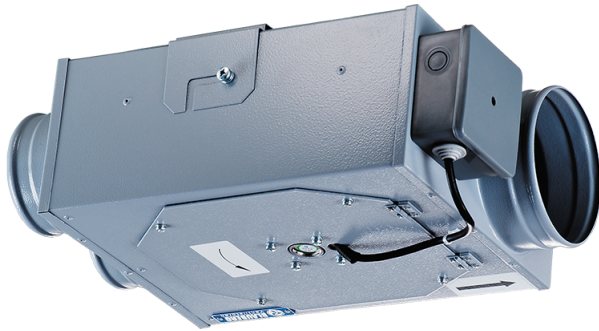


- Maximum airflow: 162
- Sound pressure level LpA at 3 m: 43
- Motor type: AC
- Impeller type: Centrifugal backward curved blades
- Casing material: Coated steel
- Installation in any position

| | Unit of measurement | Box-R 80 V3 | | |
|--|---------------------|-------------|------|-----|
| Connected air duct size | mm | 80 | | |
| Speed | - | 3 | | |
| Minimum supply voltage | V | 230 | | |
| Maximum supply voltage | V | 230 | | |
| Power supply frequency | Hz | 50 | | |
| Rated power | W | 20 | 26 | 45 |
| Unit current | A | 0.32 | 0.34 | 0.4 |
| Maximum airflow | m ³ /h | 88 | 130 | 162 |
| Sound pressure level LpA at 3 m | dB(A) | 32 | 35 | 43 |
| Weight | kg | 2 | | |
| Transported air temperature (max) | °C | 50 | | |
| Ingress protection rating | - | IPX4 | | |
| Ingress protection rating of the drive | - | IP44 | | |

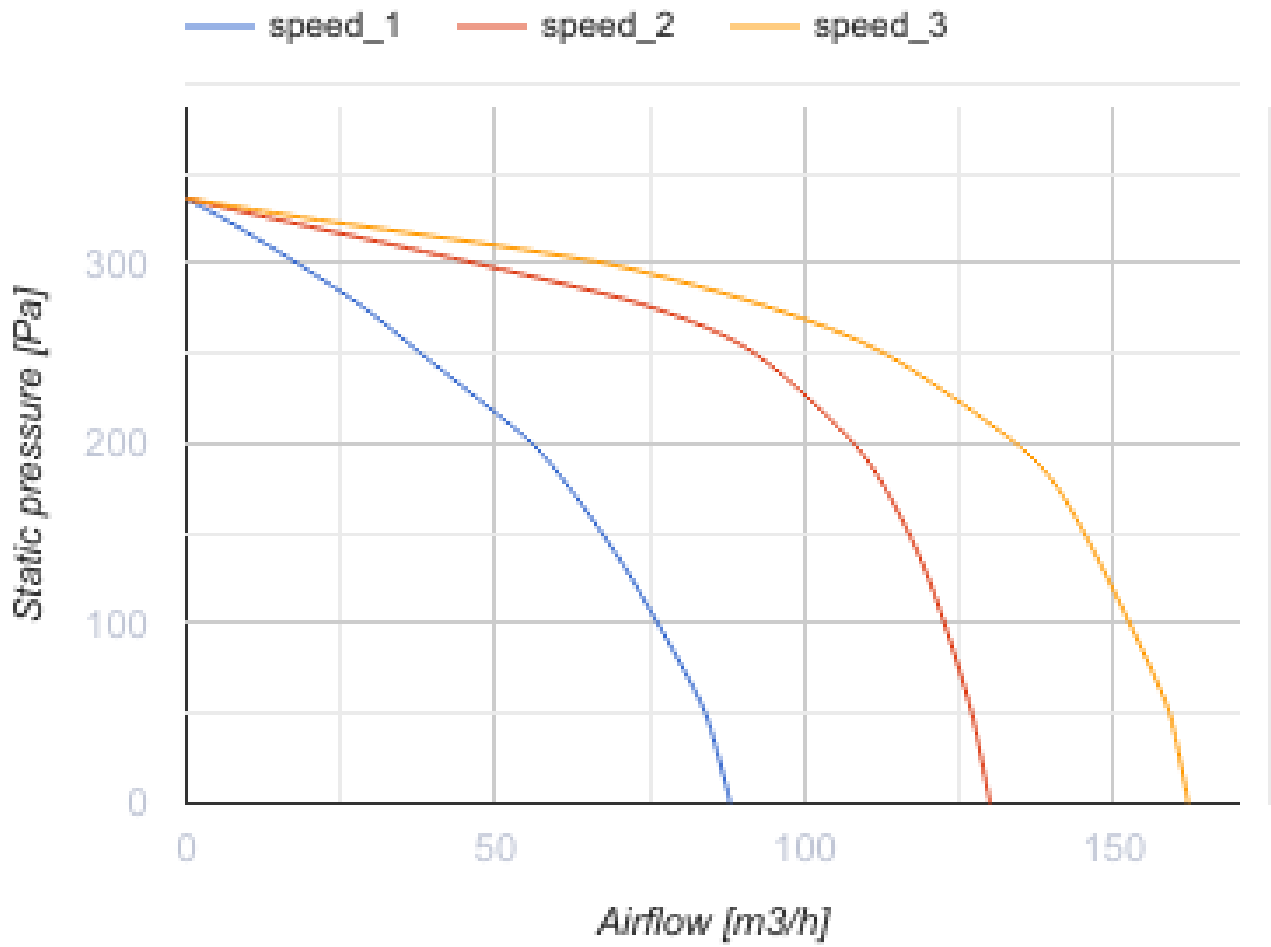


Dimensions

| ØD | ØD1 | B | H | L | L2 |
|----|-----|-----|----|-----|-----|
| 79 | 79 | 260 | 90 | 352 | 253 |

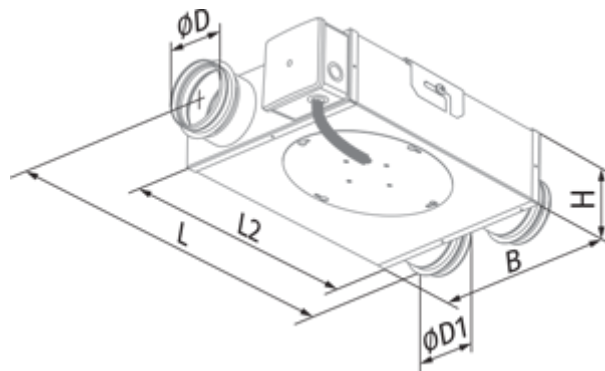



Accessories





Temperature controllers

| Name | Photo | Description |
|-------------------------|---|----------------------------|
| MLCD E2 |  | Room temperature regulator |

Speed control switches

| Name | Photo | Description |
|-------------------------|---|--------------------|
| CDP-2/5 |  | Multi-speed switch |
| CDP-3/5 |  | Multi-speed switch |

Humidity sensors

| Name | Photo | Description |
|---------------------------------|---|-------------|
| TE / TI 1.5 |  | Timers |
| HSE / HSI 1.5 |  | Sensors |
| LSE / LSI 1.5 |  | Sensors |
| IRSE / IRSI 1.5 |  | Sensors |