



Bravo 125

Extract fans

- Maximum airflow: 192
- Sound pressure level LpA at 3 m: 37
- Motor type: AC
- Backdraft protection: Backdraft damper


	Unit of measurement	Bravo 125
Connected air duct size	mm	125
Speed	-	1
Minimum supply voltage	V	220
Maximum supply voltage	V	240
Power supply frequency	Hz	50
Rated power	W	16
Unit current	A	0.1
Maximum airflow	m ³ /h	192
Sound pressure level LpA at 3 m	dB(A)	37
Ingress protection rating	-	IP34

Dimensions

a	b	c	∅ d	e
176	144	104	125	17



Ecodesign

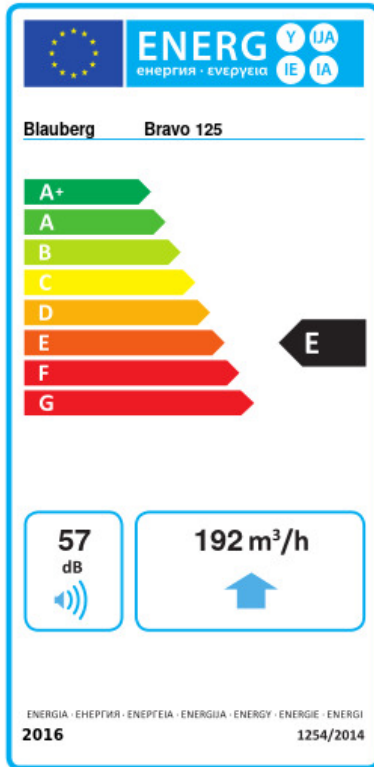

Trademark	Blauberg					
Model	Bravo 125					
Specific energy consumption (SEC) (kWh/(m ² /a))	Cold		Average		Warm	
	-32	B	-15	E	-6	F
Type of ventilation unit	Unidirectional					
Type of drive installed	Multi-speed					
Type of heat recovery system	None					
Maximum flow rate (m ³ /h)	192					
Electric power input (W)	16					
Reference flow rate (m ³ /s)	0.037					
Specific power input (SPI) (W/(m ³ /h))	0.054					
Control typology	Manual control					
Maximum external leakage rates (%)	2.7					
Declared typology	RVU UVU					
Sound power level (dB(A))	57					
The annual electricity consumption (AEC) (kWh/a)	Cold	Average	Warm			
	100	100	100			
The annual heating saved (AHS) (kWh/a)	Cold	Average	Warm			
	3400	1700	800			


Accessories

Thyristor speed controllers













Name	Photo	Description
CDT E1.8		Thyristor speed controller










Flexible ducts

Name	Photo	Description
BlauFlex PVC		Flexible air ducts BlauFlex

BlauFlex Iso N 127/7.6		Flexible air ducts BlauFlex
----------------------------------------	-----------------------------------------------------------------------------------	-----------------------------

Flat duct

Name	Photo	Description
BlauPlast RR 125/0.5		Round duct
BlauPlast RR 125/1		Round duct
BlauPlast RR 125/1.5		Round duct
BlauPlast RTR 125/0.35-0.5		Round telescopic duct
BlauPlast RTR 125/0.5-1		Round telescopic duct
BlauPlast RV 125		Round duct connector
BlauPlast RSV 125		Flexible duct connector
BlauPlast RB 125/90°		Bend 90°
BlauPlast RH 125		Round duct holder
BlauPlast RVP 125		Round duct connector with plate
BlauPlast RVPK 125		Round duct connector with a plate and a gravity backdraft damper
BlauPlast US-90° 125/204x60		Bend

BlauPlast UBS 125/204x60		Connector
BlauPlast RR 125/0.35		Round duct
BlauPlast RR 125/2		Round duct
BlauPlast RR 125/2.5		Round duct
BlauPlast RVK 125		Connector with backdraft damper for round ducts
BlauPlast RB 125/45°		Bend 45°
BlauPlast WP 125		Wall plate for round ducts
BlauPlast RRT 125		T-joint for round ducts
BlauPlast US-90° 125/220x90		Bend