

Bravo Still 100 IR

Extract fans

- Sound pressure level LpA at 3 m: 26
- Casing material: Plastic
- Backdraft protection: Backdraft damper
- Motion sensor
- Timer: Turn off timer

	Unit of measurement	Bravo Still 100 IR
Connected air duct size	mm	100
Maximum supply voltage	V	240
Minimum supply voltage	V	220
Power supply frequency	Hz	50
Rated power	W	5.6
Unit current	A	0.04
Maximum airflow	m^3/h	70
Sound pressure level LpA at 3 m	dB(A)	26
Ambient air temperature min	°C	1
Ambient air temperature max	°C	40
Ingress protection rating	-	IP34
Impeller material	-	Plastic

Dimensions

a	b	c	Ø d	e
150	122	102	100	17

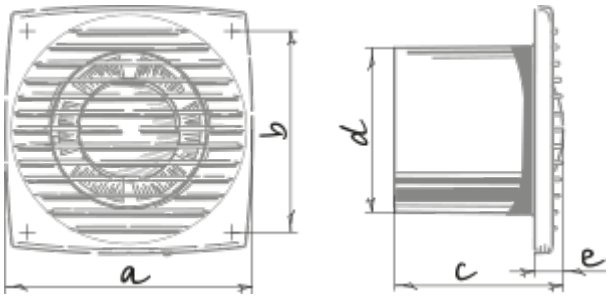
a
b
d
c
e

Ecodesign

Trademark	Blauberg					
Model	Bravo Still 100 IR					
Specific energy consumption (SEC) (kWh/(m²/a))	Cold		Average		Warm	
	-54.3	A+	-27.3	B	-11.7	E
Type of ventilation unit	Unidirectional					
Type of drive installed	Multi-speed					
Type of heat recovery system	None					
Maximum flow rate (m³/h)	70					
Electric power input (W)	5.6					
Reference flow rate (m³/s)	0.014					
Specific power input (SPI) (W/(m³/h))	0.051					
Control typology	Local demand control					
Maximum external leakage rates (%)	2.7					
Declared typology	RVU UVU					
Sound power level (dB(A))	46					
The annual electricity consumption (AEC) (kWh/a)	Cold		Average		Warm	
	42		42		42	
The annual heating saved (AHS) (kWh/a)	Cold		Average		Warm	
	5536		2830		1280	