



## Cabrio Base V2 100 T


Innovative domestic exhaust fan with an automatic shutter, low noise operation and low energy consumption

- Sound pressure level LpA at 3 m: 25
- Impeller type: Axial
- Casing material: Plastic
- Timer: Internal timer, Turn off timer, Turn on timer

	Unit of measurement	Cabrio Base V2 100 T	
Speed	-	1	2
Connected air duct size	mm	100	
Minimum supply voltage	V	220	
Maximum supply voltage	V	240	
Power supply frequency	Hz	50	
Rated power	W	6	8.5
Unit current	A	0.039	0.063
Maximum airflow	m <sup>3</sup> /h	60	90
Sound pressure level LpA at 3 m	dB(A)	22	25
Weight	kg	0.55	
Ambient air temperature min	°C	1	
Ambient air temperature max	°C	40	
Ingress protection rating	-	IP44	
Impeller material	-	Plastic	
Article	-	8046810	

### Dimensions

a	b	c	Ø d	e
175	221	77	99	39

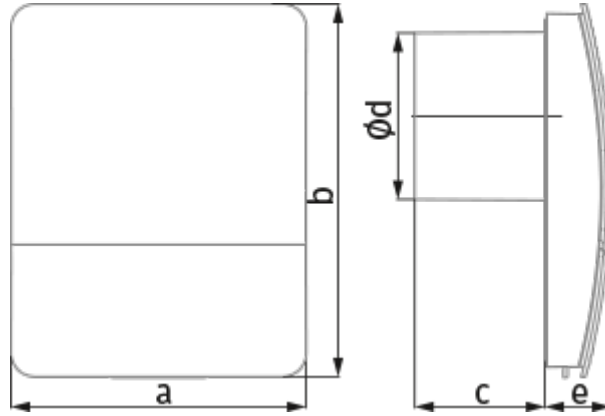


## Ecodesign

Trademark	Blauberg					
Model	Cabrio Base V2 100 T					
Specific energy consumption (SEC) (kWh/(m <sup>3</sup> /a))	Cold		Average		Warm	
	-33.7	B	-15.8	E	-5.5	F
Type of ventilation unit	Unidirectional					
Type of drive installed	2-speed					
Type of heat recovery system	None					
Maximum flow rate (m <sup>3</sup> /h)	90					
Electric power input (W)	8.5					
Reference flow rate (m <sup>3</sup> /s)	0.017					
Specific power input (SPI) (W/(m <sup>3</sup> /h))	0.1					
Control typology	Clock control					
Maximum external leakage rates (%)	2.7					
Declared typology	RVU UVU					
Sound power level (dB(A))	42					
The annual electricity consumption (AEC) (kWh/a)	Cold		Average		Warm	
	118		118		118	
The annual heating saved (AHS) (kWh/a)	Cold		Average		Warm	
	3667		1874		848	

## Accessories

### Speed control switches

Name	Photo	Description
<a href="#">CDP-2/5</a>		Multi-speed switch
<a href="#">CDP-2/10</a>		Multi-speed switch