

Ceileo 200

Centrifugal extract low-noise and low-watt fans for ceiling mounting


- Maximum airflow: 225
- Sound pressure level LpA at 3 m: 28
- Impeller type: Centrifugal forward curved blades
- Casing material: Galvanized steel
- Backdraft protection: Backdraft damper




	Unit of measurement	Ceileo 200			
Connected air duct size	mm	100/150			
Speed	-	2			
Phases	-	1			
Minimum supply voltage	V	230			
Maximum supply voltage	V	230			
Power supply frequency	Hz	50		60	
Rated power	W	20	29	21	34
Unit current	A	0.1	0.13	0.11	0.15
Maximum airflow	m ³ /h	130	210	130	225
rotation speed at 50hz	-	714	1026	588	936
Sound pressure level LpA at 3 m	dB(A)	24	27	24	28
Weight	kg	5.3			
Ambient air temperature min	°C	1			
Ambient air temperature max	°C	40			
Ingress protection rating	-	IPX2			

Dimensions

$\varnothing D$	$\varnothing d$	L1	L2	A	B	C	E	H	h
148	98	100	45	330	258	260	395	188	18

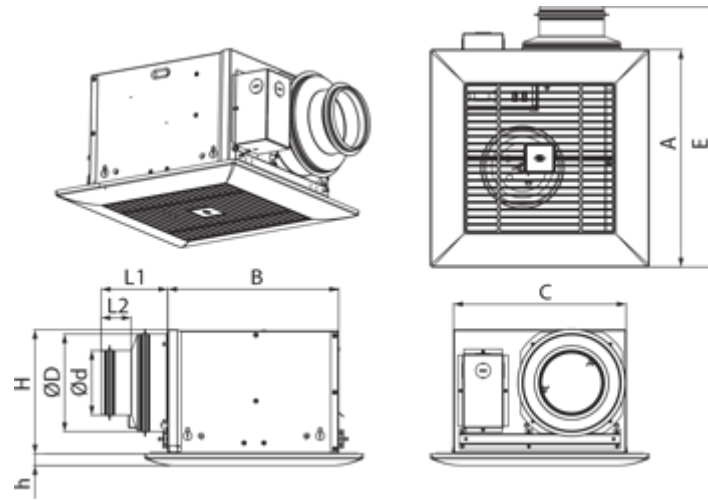

Ecodesign

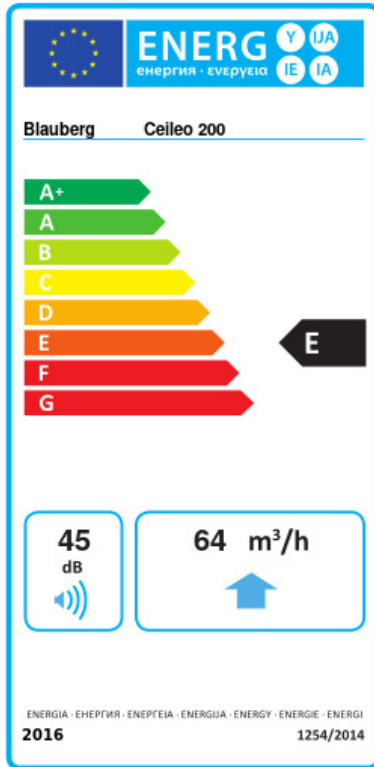

Trademark	Blaubeerg		
Model	Ceileo 200		
Specific energy consumption (SEC) (kWh/(m ² /a))	Cold	Average	Warm
	-26.9	B	-10.5 E -1.1 F
Type of ventilation unit	Unidirectional		
Type of drive installed	2-speed		
Type of heat recovery system	None		
Maximum flow rate (m ³ /h)	64		
Electric power input (W)	25.5		
Reference flow rate (m ³ /s)	0.024		
Reference pressure difference (Pa)	50		
Specific power input (SPI) (W/(m ³ /h))	0.212		
Control typology	Manual control		
Maximum external leakage rates (%)	2.7		
Sound power level (dB(A))	45		
Declared typology	RVU UVU		
The annual electricity consumption (AEC) (kWh/a)	Cold	Average	Warm
	265	265	265
The annual heating saved (AHS) (kWh/a)	Cold	Average	Warm
	3355	1715	776


Accessories

Speed control switches

Name	Photo	Description
CDP-2/10		Multi-speed switch

Hoods

Name	Photo	Description
Decor S 102 HK		Metal hoods

Decor S 152 HK		Metal hoods
--------------------------------	---	-------------

Flexible ducts

Name	Photo	Description
BlauFlex PVC		Flexible air ducts BlauFlex