

# Ceileo 300

Centrifugal extract low-noise and low-watt fans for ceiling mounting


- Maximum airflow: 320
- Sound pressure level LpA at 3 m: 32
- Impeller type: Centrifugal forward curved blades
- Casing material: Galvanized steel
- Backdraft protection: Backdraft damper




	Unit of measurement	Ceileo 300			
Connected air duct size	mm	150			
Speed	-	2			
Phases	-	1			
Minimum supply voltage	V	230			
Maximum supply voltage	V	230			
Power supply frequency	Hz	50		60	
Rated power	W	31	49	35	63
Unit current	A	0.15	0.22	0.17	0.28
Maximum airflow	m <sup>3</sup> /h	220	300	200	320
rotation speed at 50hz	-	936	1254	888	1320
Sound pressure level LpA at 3 m	dB(A)	28	31	27	32
Weight	kg	5.1			
Ambient air temperature min	°C	1			
Ambient air temperature max	°C	40			
Ingress protection rating	-	IPX2			

## Dimensions

Ø D	L1	A	B	C	E	H	h
149	50	330	258	260	395	188	18

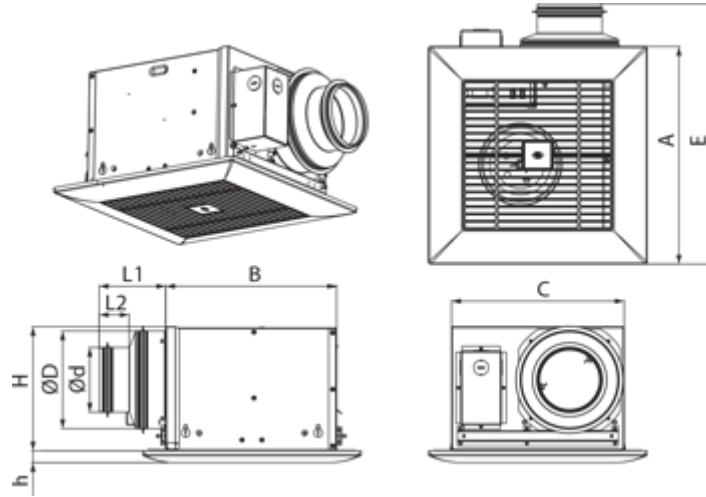

## Ecodesign

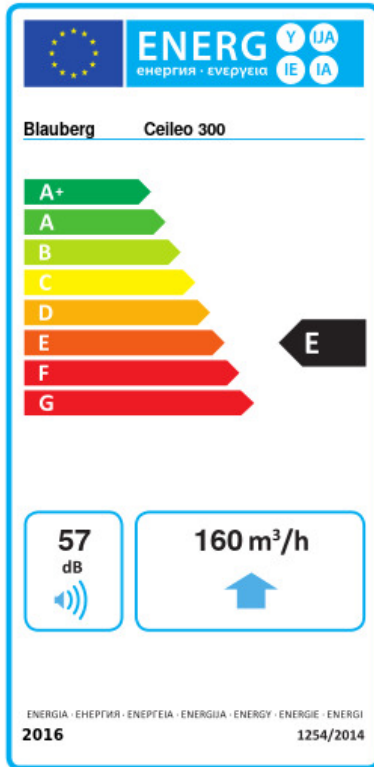

Trademark	Blauberg		
Model	Ceileo 300		
Specific energy consumption (SEC) (kWh/(m <sup>2</sup> /a))	Cold	Average	Warm
	-28.7	B	-12.3 E -2.9 F
Type of ventilation unit	Unidirectional		
Type of drive installed	2-speed		
Type of heat recovery system	None		
Maximum flow rate (m <sup>3</sup> /h)	160		
Electric power input (W)	44		
Reference flow rate (m <sup>3</sup> /s)	0.044		
Reference pressure difference (Pa)	50		
Specific power input (SPI) (W/(m <sup>3</sup> /h))	0.156		
Control typology	Manual control		
Maximum external leakage rates (%)	2.7		
Sound power level (dB(A))	57		
Declared typology	RVU UVU		
The annual electricity consumption (AEC) (kWh/a)	Cold	Average	Warm
	195	195	195
The annual heating saved (AHS) (kWh/a)	Cold	Average	Warm
	3355	1715	776

## Accessories

### Other accessories

Name	Photo	Description
<a href="#">CDP-2/10</a>		Multi-speed switch

### Hoods

Name	Photo	Description
------	-------	-------------

<a href="#">Decor S 152 HK</a>		Metal hoods
--------------------------------	---	-------------

### Air distribution

Name	Photo	Description
<a href="#">BlauFlex PVC</a>		Flexible air ducts BlauFlex