

Ceileo 300 H

Centrifugal extract low-noise and low-watt fans for ceiling mounting




- Maximum airflow: 320
- Sound pressure level LpA at 3 m: 32
- Impeller type: Centrifugal forward curved blades
- Casing material: Galvanized steel
- Backdraft protection: Backdraft damper
- Humidity sensor
- Timer: Turn off timer

	Unit of measurement	Ceileo 300 H			
Connected air duct size	mm	150			
Speed	-	2			
Phases	-	1			
Minimum supply voltage	V	230			
Maximum supply voltage	V	230			
Power supply frequency	Hz	50		60	
Rated power	W	31	49	63	35
Unit current	A	0.15	0.22	0.28	0.17
Maximum airflow	m ³ /h	220	300	320	200
rotation speed at 50hz	-	936	1254	1320	888
Sound pressure level LpA at 3 m	dB(A)	28	31	32	27
Weight	kg	5.1			
Ambient air temperature min	°C	1			
Ambient air temperature max	°C	40			
Ingress protection rating	-	IPX2			

Dimensions

Ø D	L1	A	B	C	E	H	h
149	50	330	258	260	395	188	18

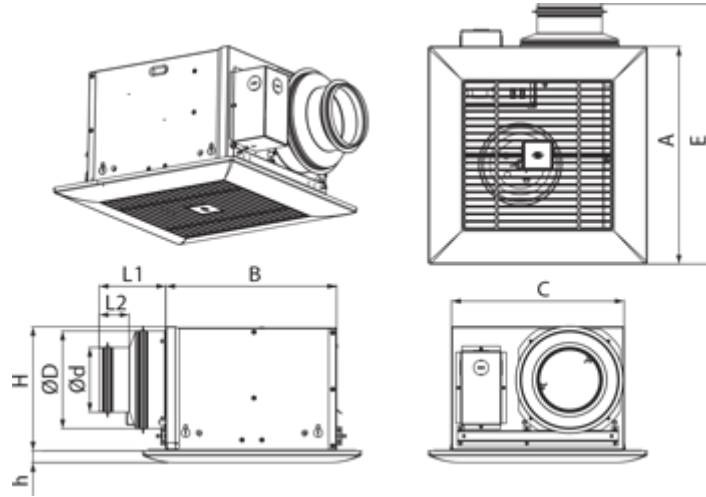

[Decor S 152 HK](#)



Metal hoods

Flexible ducts

Name	Photo	Description
BlauFlex PVC		Flexible air ducts BlauFlex