





Centro-M EC 250

Inline mixed-flow fans with EC motor

- Maximum airflow: 1230
- Sound pressure level LpA at 3 m: 46
- Motor type: EC
- Impeller type: Centrifugal impeller with backward curved blades
- Casing material: Coated steel
- Installation in any position

	Unit of measurement	Centro-M EC 250
Connected air duct size	mm	250
Speed	-	1
Minimum supply voltage	V	230
Maximum supply voltage	V	230
Power supply frequency	Hz	50/60
Rated power	W	164
Unit current	A	1.15
Maximum airflow	m ³ /h	1230
Sound pressure level LpA at 3 m	dB(A)	46
Weight	kg	5.1
Transported air temperature (max)	°C	60
Transported air temperature (min)	°C	-25
Ingress protection rating	-	IPX4
Ingress protection rating of the drive	-	IP44

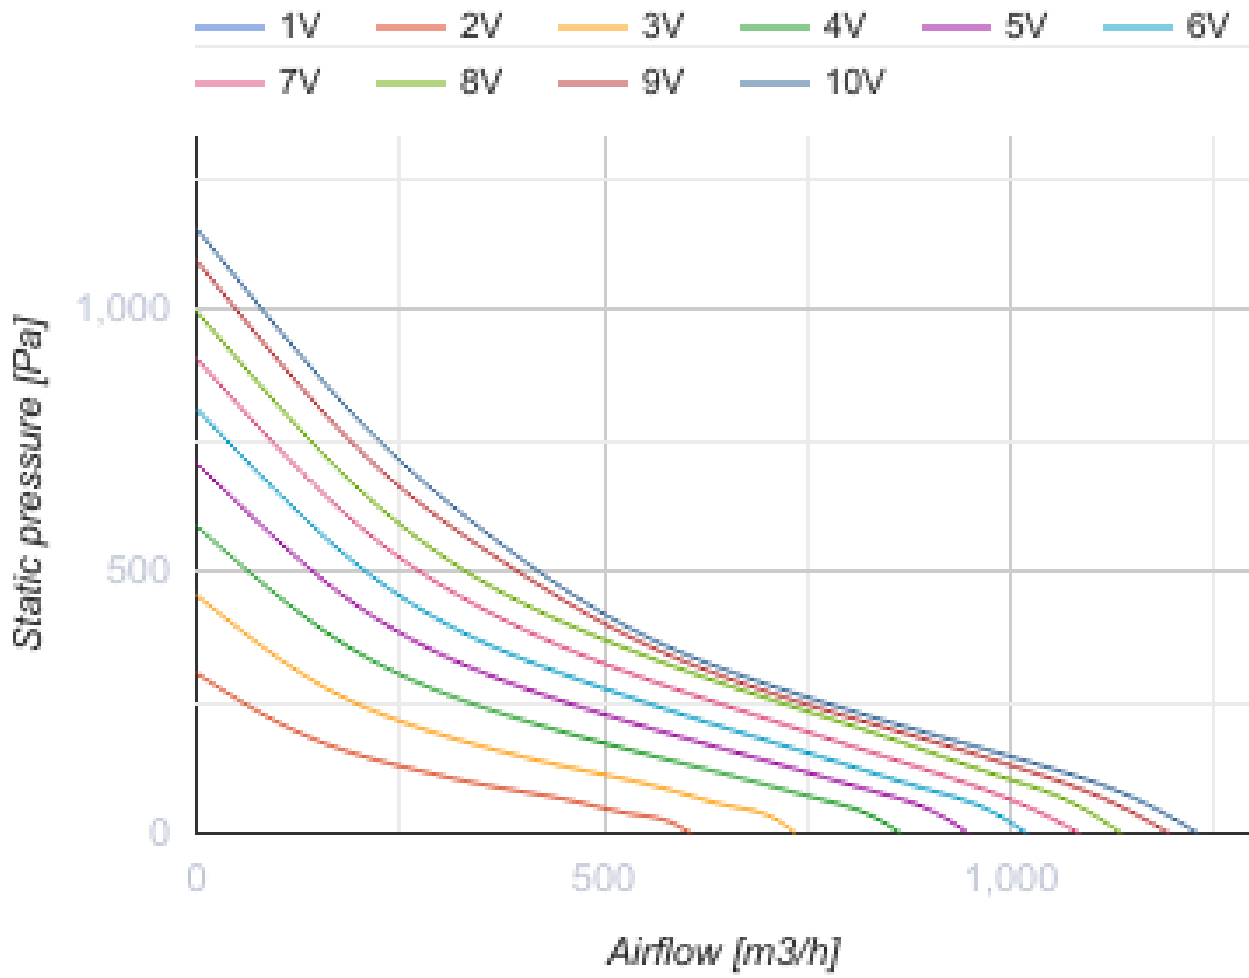

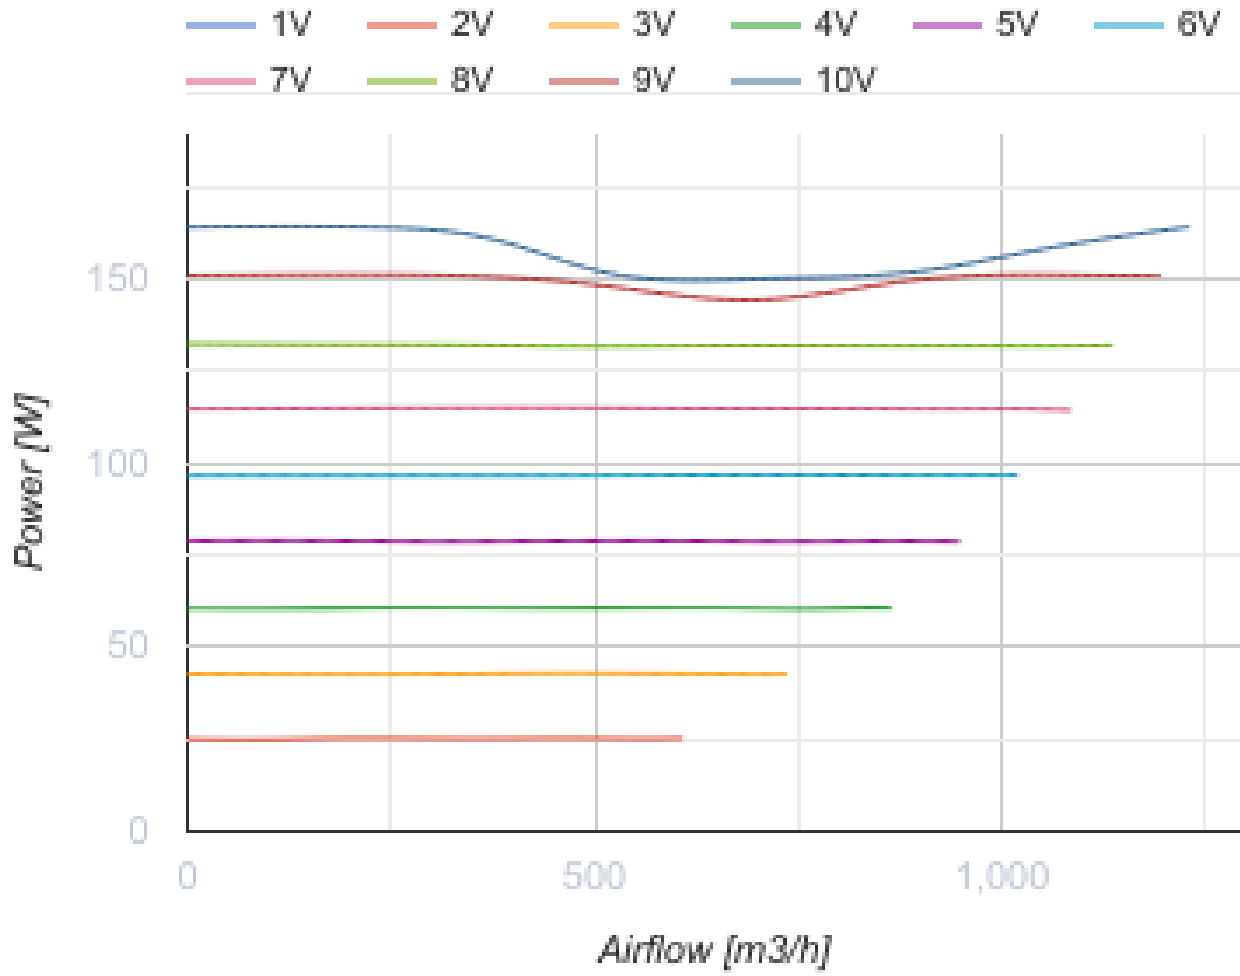

Dimensions

ØD	ØD1	B	B1	L	L1	L2	L3
248	345	395	355	250	25	30	40



Ecodesign

Trademark	Blauberg
Model	Centro-M EC 250
Type of ventilation unit	Unidirectional
Type of drive installed	Integrated VSD
Type of heat recovery system	None
Nominal flow rate (m ³ /s)	0.206
Nominal external pressure (Pa)	308
Maximum external leakage rates (%)	2.7
Static efficiency (%)	47.7
Declared typology	NRVU UVU
Sound power level (dB(A))	66
Effective electric power input (kW)	0.156

Accessories

Thyristor speed controllers

Name	Photo	Description
CDT E1.8		Thyristor speed controller