



## Deco 150 T

Extract fans

- Maximum airflow: 298
- Sound pressure level LpA at 3 m: 40
- Motor type: AC
- Casing material: Plastic
- Backdraft protection: Backdraft damper
- Timer: Turn off timer


	Unit of measurement	Deco 150 T
Connected air duct size	mm	150
Speed	-	1
Minimum supply voltage	V	220
Maximum supply voltage	V	240
Power supply frequency	Hz	50
Rated power	W	24
Unit current	A	0.13
Maximum airflow	m <sup>3</sup> /h	298
Sound pressure level LpA at 3 m	dB(A)	40
Ambient air temperature min	°C	1
Ambient air temperature max	°C	40
Ingress protection rating	-	IP34

### Dimensions

Ø D	Ø D1	Ø D2	H	e
149.5	154	188.5	145	14



## Ecodesign

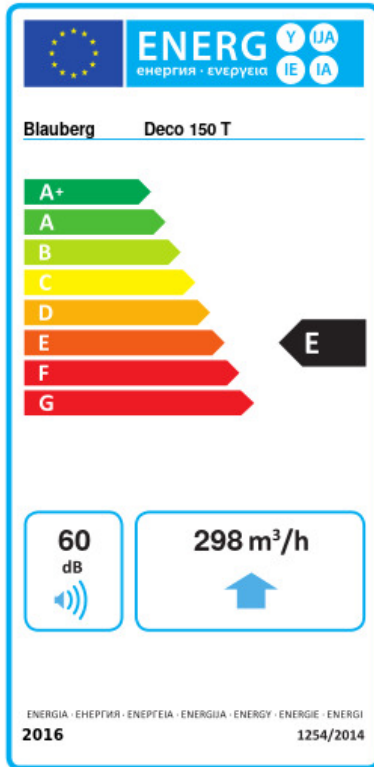

Trademark	Blauberg					
Model	Deco 150 T					
Specific energy consumption (SEC) (kWh/(m²/a))	Cold	Average		Warm		
	-35.2	A	-17.2	E	-7	F
Type of ventilation unit	Unidirectional					
Type of drive installed	Multi-speed					
Type of heat recovery system	None					
Maximum flow rate (m³/h)	298					
Electric power input (W)	24					
Reference flow rate (m³/s)	0.058					
Specific power input (SPI) (W/(m³/h))	0.052					
Control typology	Clock control					
Maximum external leakage rates (%)	2.7					
Declared typology	RVU UVU					
Sound power level (dB(A))	60					
The annual electricity consumption (AEC) (kWh/a)	Cold	Average		Warm		
	60	60		60		
The annual heating saved (AHS) (kWh/a)	Cold	Average		Warm		
	3667	1874		848		

## Accessories

### Thyristor speed controllers

Name	Photo	Description
<a href="#">CDT E1.8</a>		Thyristor speed controller