

Freshpoint 200-E Pro

Smart HRV unit for single-room ventilation with air filtration, an electric heater, customizable air flow settings and a user-friendly interface


- Power of electrical preheater: 100
- Maximum airflow: 70
- Sound pressure level LpA at 3 m: 45
- Sound pressure level LpA at 1 m: 55
- Heat recovery efficiency: 85
- Filter: G3
- Motor type: EC
- Preheater: Electric
- Control: Smartphone
- Casing material: Plastic
- Humidity sensor
- CO2 sensor
- VOC sensor
- Temperature sensor: Built-in

	Unit of measurement	Freshpoint 200-E Pro		
Connected air duct size	mm	200		
Speed	-	3		
Phases	-	1		
Minimum supply voltage	V	220		
Maximum supply voltage	V	240		
Power supply frequency	Hz	50/60		
Rated power	W	5	11	22
Power of electrical preheater	W	100		
Unit current	A	0.56	0.59	0.63
Maximum airflow	m ³ /h	15	50	70
Sound pressure level LpA at 3 m	dB(A)	15	37	45
Sound pressure level LpA at 1 m	dB(A)	25	48	55
Heat recovery efficiency	%	85		
Heat recovery efficiency, max	%	85		
Heat exchanger material	-	Copper		
Filter	-	G3		
Transported air temperature (max)	°C	50		
Transported air temperature (min)	°C	-30		
Ingress protection rating	-	IPX4		


Maximum wall thickness	mm	440
------------------------	----	-----

Dimensions

D	L	L1
206	540	440

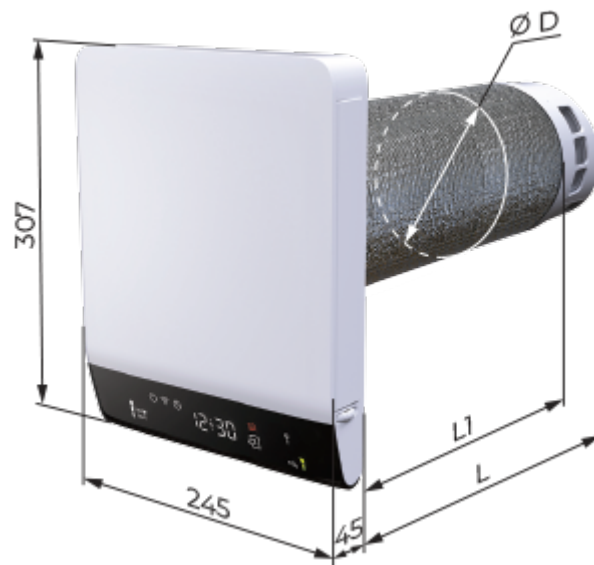

Ecodesign

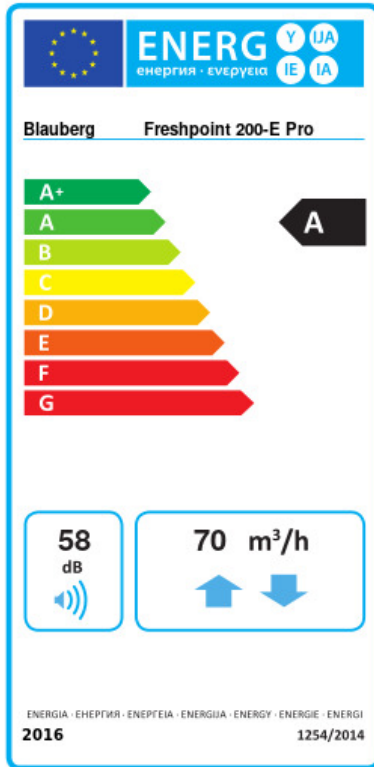

Trademark	Blaubeerg					
Model	Freshpoint 200-E Pro					
Specific energy consumption (SEC) (kWh/(m ² /a))	Cold		Average		Warm	
	-68.7	A+	-36	A	-14.5	E
Type of ventilation unit	Bidirectional					
Type of drive installed	Variable speed					
Type of heat recovery system	Recuperative					
Thermal efficiency of heat recovery (%)	60					
Maximum flow rate (m ³ /h)	70					
Electric power input (W)	16					
Reference flow rate (m ³ /s)	0.014					
Specific power input (SPI) (W/(m ³ /h))	0.24					
Control typology	Local demand control					
Maximum internal leakage rates (%)	0.1					
Maximum external leakage rates (%)	0.9					
Mixing rate (%)	20					
Airflow sensitivity at +20 Pa and -20 Pa (%)	0.93					
The indoor/outdoor air tightness (m ³ /h)	7					
Sound power level (dB(A))	58					
Declared typology	RVU BVU					
The annual electricity consumption (AEC) (kWh/a)	Cold		Average		Warm	
	722		185		140	
The annual heating saved (AHS) (kWh/a)	Cold		Average		Warm	
	78		40		18	