

# Hybrid Max E S21

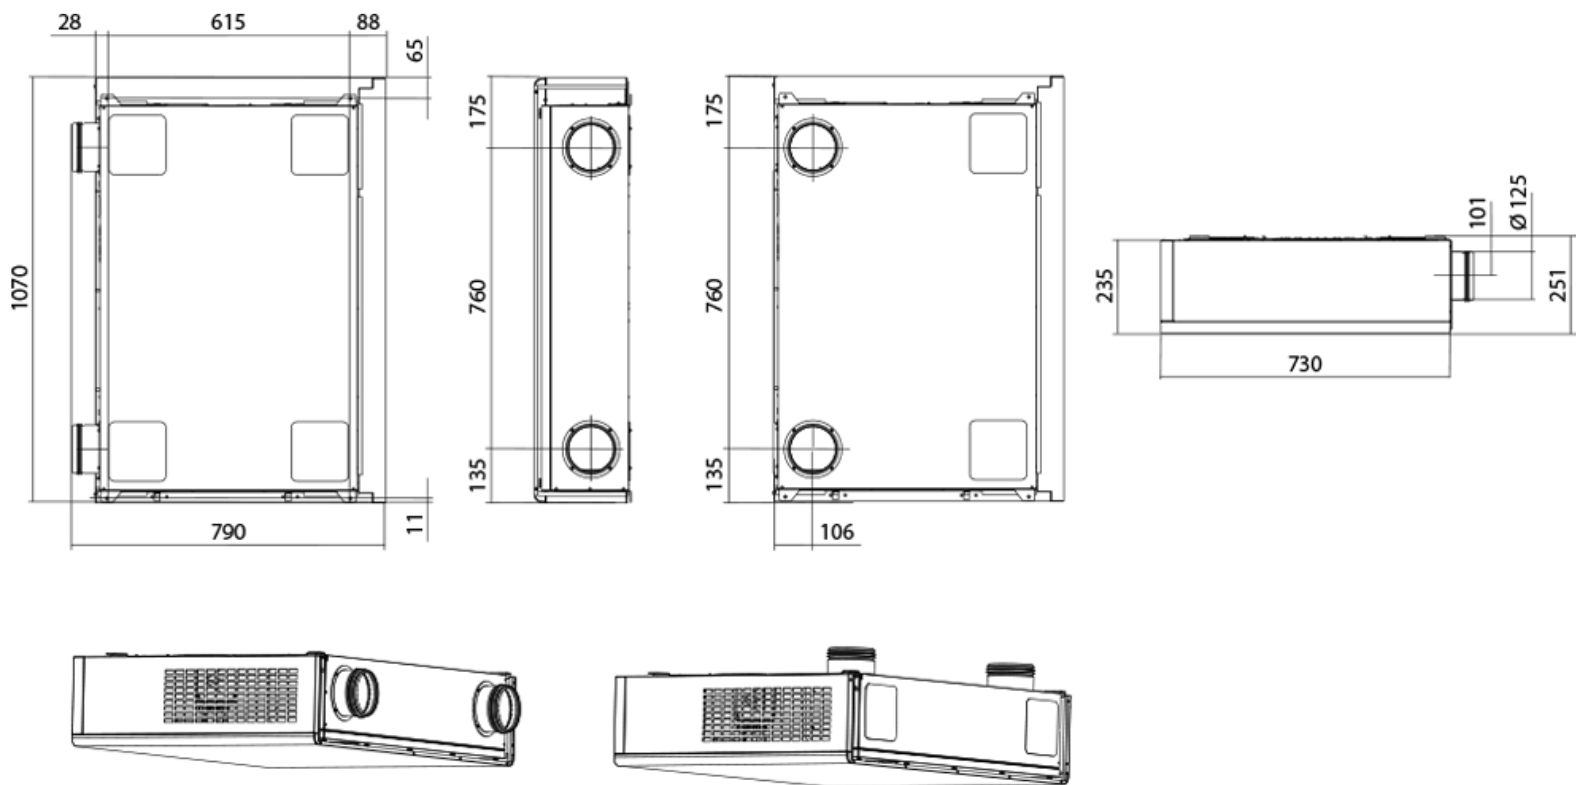
Decentralized unit for the small offices, facilities, classrooms and living spaces

- Sound insulation
- Motor type: EC
- CO2 sensor: Optional
- VOC sensor: Optional





	Unit of measurement	Hybrid Max E S21
Speed	-	3
Minimum supply voltage	V	230
Maximum supply voltage	V	230
Power supply frequency	Hz	50/60
Unit current	A	0.5
Transported air temperature (max)	°C	40
Transported air temperature (min)	°C	-25

## Dimensions



## Accessories


### Control Panels

Name	Photo	Description
<a href="#">S22</a>		Control panels
<a href="#">S25</a>		LCD control panel

### Humidity sensors

Name	Photo	Description
<a href="#">FS2</a>		Humidity sensor

### CO2 sensors

Name	Photo	Description
<a href="#">CD-1</a>		CO2 sensors

<a href="#">CD-2</a>		CO2 sensors
<a href="#">CD-3</a>		