

Hybrid Max S21


Decentralized unit for the small offices, facilities, classrooms and living spaces

- Sound insulation
- Motor type: EC
- CO2 sensor: Optional
- VOC sensor: Optional



	Unit of measurement	Hybrid Max S21
Speed	-	3
Minimum supply voltage	V	230
Maximum supply voltage	V	230
Power supply frequency	Hz	50/60
Unit current	A	0.5
Transported air temperature (max)	°C	40
Transported air temperature (min)	°C	-25

Dimensions

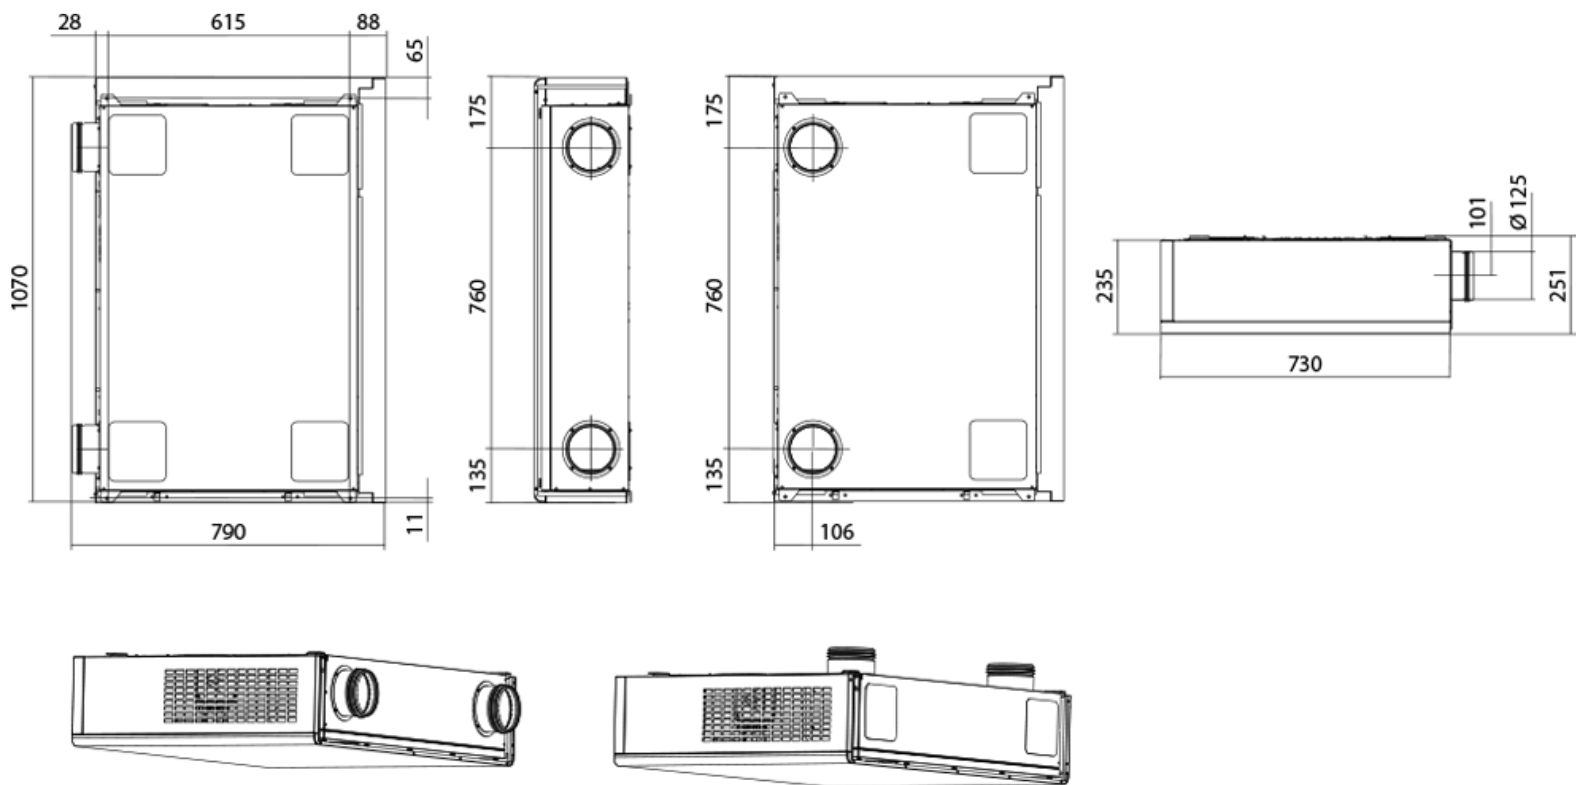

Accessories

Control Panels



Name	Photo	Description
S22		Control panels
S22 Wi-Fi		Control panels
S25		LCD control panel

Humidity sensors

Name	Photo	Description
FS2		Humidity sensor

CO2 sensors

Name	Photo	Description
------	-------	-------------

CD-1		CO2 sensors
CD-2		CO2 sensors
CD-3		