

Hybrid Max S21


Decentralized unit for the small offices, facilities, classrooms and living spaces

- Sound insulation
- Motor type: EC
- CO2 sensor: Optional
- VOC sensor: Optional



| | Unit of measurement | Hybrid Max S21 |
|-----------------------------------|---------------------|----------------|
| Speed | - | 3 |
| Minimum supply voltage | V | 230 |
| Maximum supply voltage | V | 230 |
| Power supply frequency | Hz | 50/60 |
| Unit current | A | 0.5 |
| Transported air temperature (max) | °C | 40 |
| Transported air temperature (min) | °C | -25 |

Dimensions

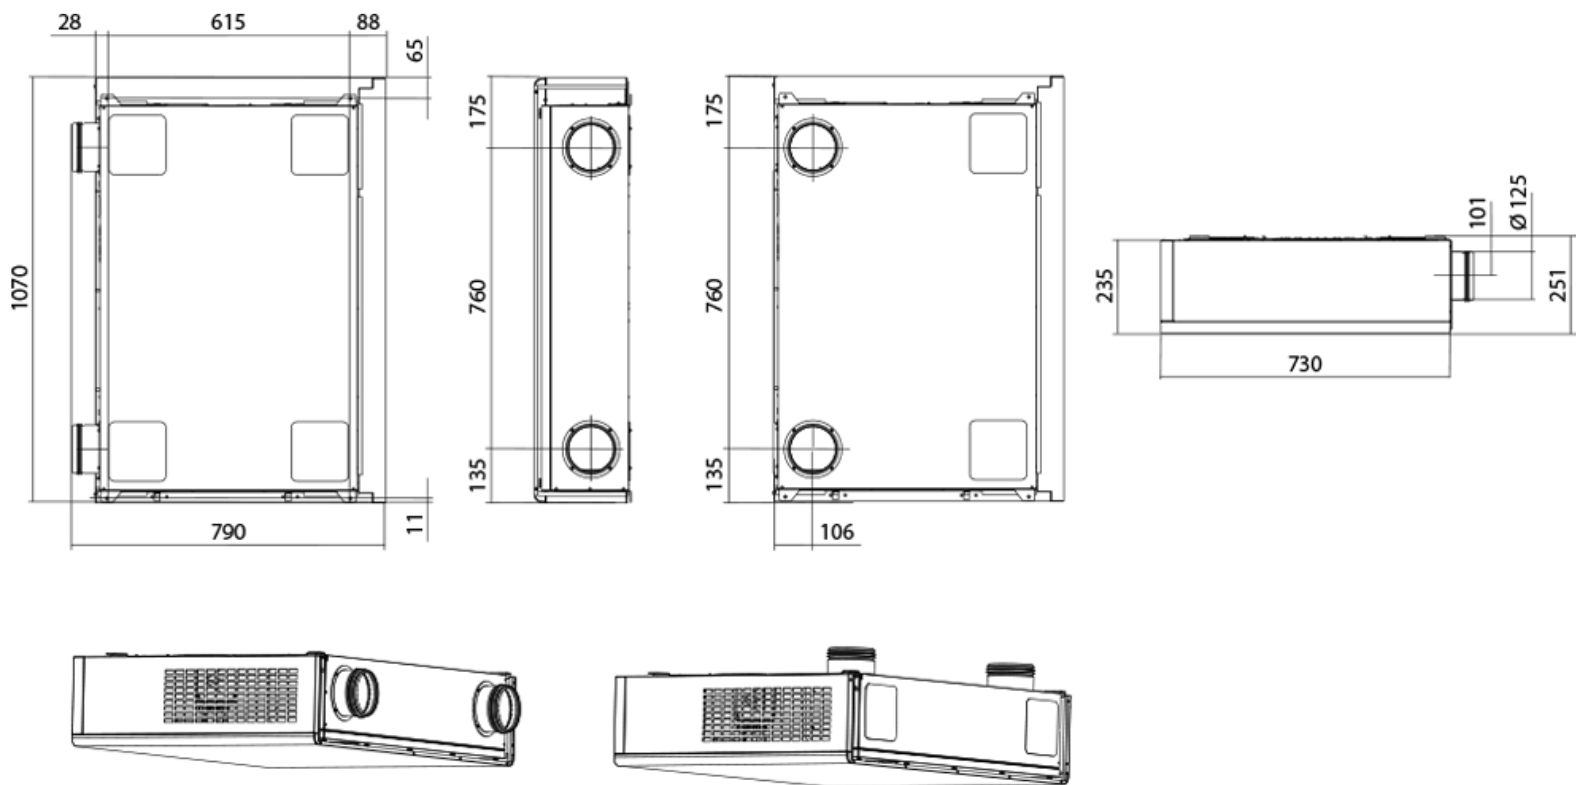


Accessories

Other accessories

| Name | Photo | Description |
|----------------------|-------|-----------------|
| FS2 | | Humidity sensor |
| CD-1 | | CO2 sensors |
| CD-2 | | CO2 sensors |
| CD-3 | | |

Other accessories

| Name | Photo | Description |
|---------------------|-------|-------------------|
| S25 | | LCD control panel |

| | | |
|---------------------------|-----------------------------------------------------------------------------------|----------------|
| S22 Wi-Fi |  | Control panels |
| S22 |  | Control panels |