

# Iso Box-F 150 G4/F8/Carbon V2

Centrifugal inline fans with forward curved blades in sound-insulated casings with filters



- Maximum airflow: 390
- Sound pressure level LpA at 3 m: 27
- Sound insulation
- Motor type: AC
- Impeller type: Centrifugal impeller with backward curved blades
- Casing material: Coated steel
- Installation in any position


	Unit of measurement	Iso Box-F 150 G4/F8/Carbon V2	
Connected air duct size	mm	150	
Speed	-	2	
Minimum supply voltage	V	230	
Maximum supply voltage	V	230	
Power supply frequency	Hz	50	
Rated power	W	89	115
Unit current	A	0.41	0.55
Maximum airflow	m <sup>3</sup> /h	300	390
Sound pressure level LpA at 3 m	dB(A)	16	27
Weight	kg	17.08	
Transported air temperature (max)	°C	40	
Transported air temperature (min)	°C	-25	
Ingress protection rating	-	IPX4	
Ingress protection rating of the drive	-	IP44	

## Dimensions

ØD	L	H	B	L1	B1	L2	B2
150	735	300	440	835	533	680	483



## Ecodesign

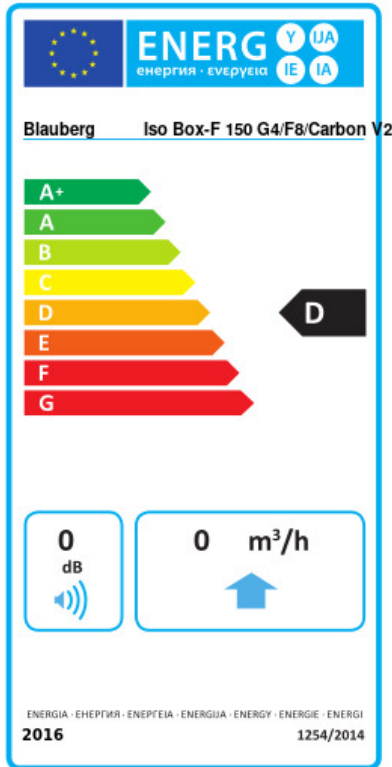

Trademark	Blaubeerg		
Model	Iso Box-F 150 G4/F8/Carbon V2		
Specific energy consumption (SEC) (kWh/(m <sup>2</sup> /a))	Cold	Average	Warm
	0 A+	0 D	0 F
Type of ventilation unit	Unidirectional		
Type of drive installed	2-speed		
Type of heat recovery system	None		
Maximum flow rate (m <sup>3</sup> /h)	0		
Electric power input (W)	0		
Reference flow rate (m <sup>3</sup> /s)	0		
Reference pressure difference (Pa)	0		
Specific power input (SPI) (W/(m <sup>3</sup> /h))	0		
Control typology	Local demand control		
Maximum external leakage rates (%)	0		
Declared typology	RVU UVU		
Sound power level (dB(A))	0		
The annual electricity consumption (AEC) (kWh/a)	Cold	Average	Warm
	0	0	0
The annual heating saved (AHS) (kWh/a)	Cold	Average	Warm
	0	0	0

## Accessories

### Other accessories

Name	Photo	Description
<a href="#">CDT E1.8</a>		Thyristor speed controller
<a href="#">CDP-2/10</a>		Multi-speed switch