



Iso-K 315 2D

Kitchen inline fans in sound-insulated casings with operational temperature of 120 °C

- Maximum airflow: 4710
- Sound pressure level LpA at 3 m: 52
- Fire resistance class: 120°C within 60 min
- Sound insulation
- Motor type: AC
- Impeller type: Centrifugal backward curved blades
- Casing material: Galvanized steel

	Unit of measurement	Iso-K 315 2D
Connected air duct size	mm	315
Speed	-	1
Minimum supply voltage	V	400
Maximum supply voltage	V	400
Power supply frequency	Hz	50/60
Rated power	W	1225
Unit current	A	2.8
Maximum airflow	m ³ /h	4710
Sound pressure level LpA at 3 m	dB(A)	52
Weight	kg	60
Transported air temperature (max)	°C	110
Transported air temperature (min)	°C	-20
Ingress protection rating	-	IP54

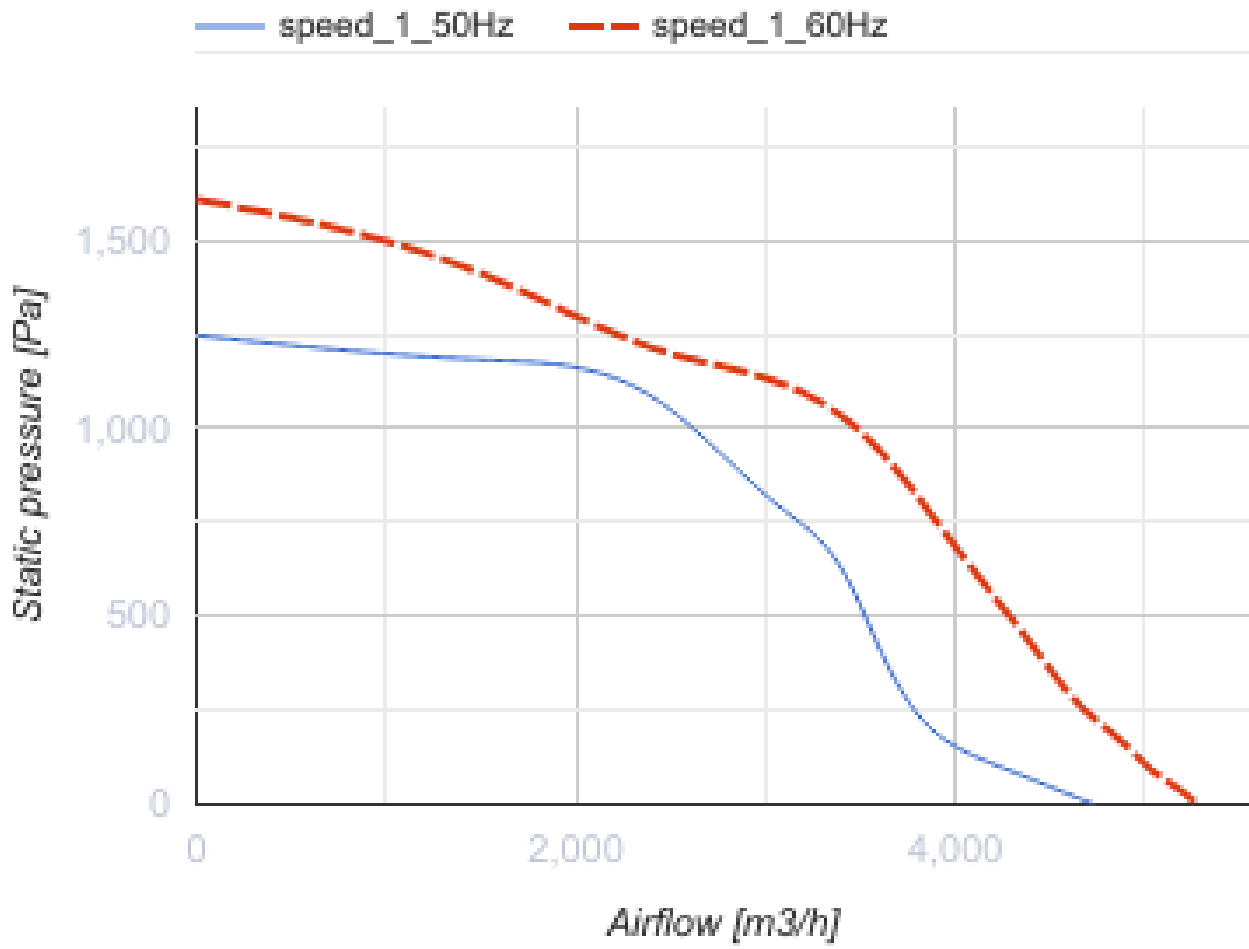

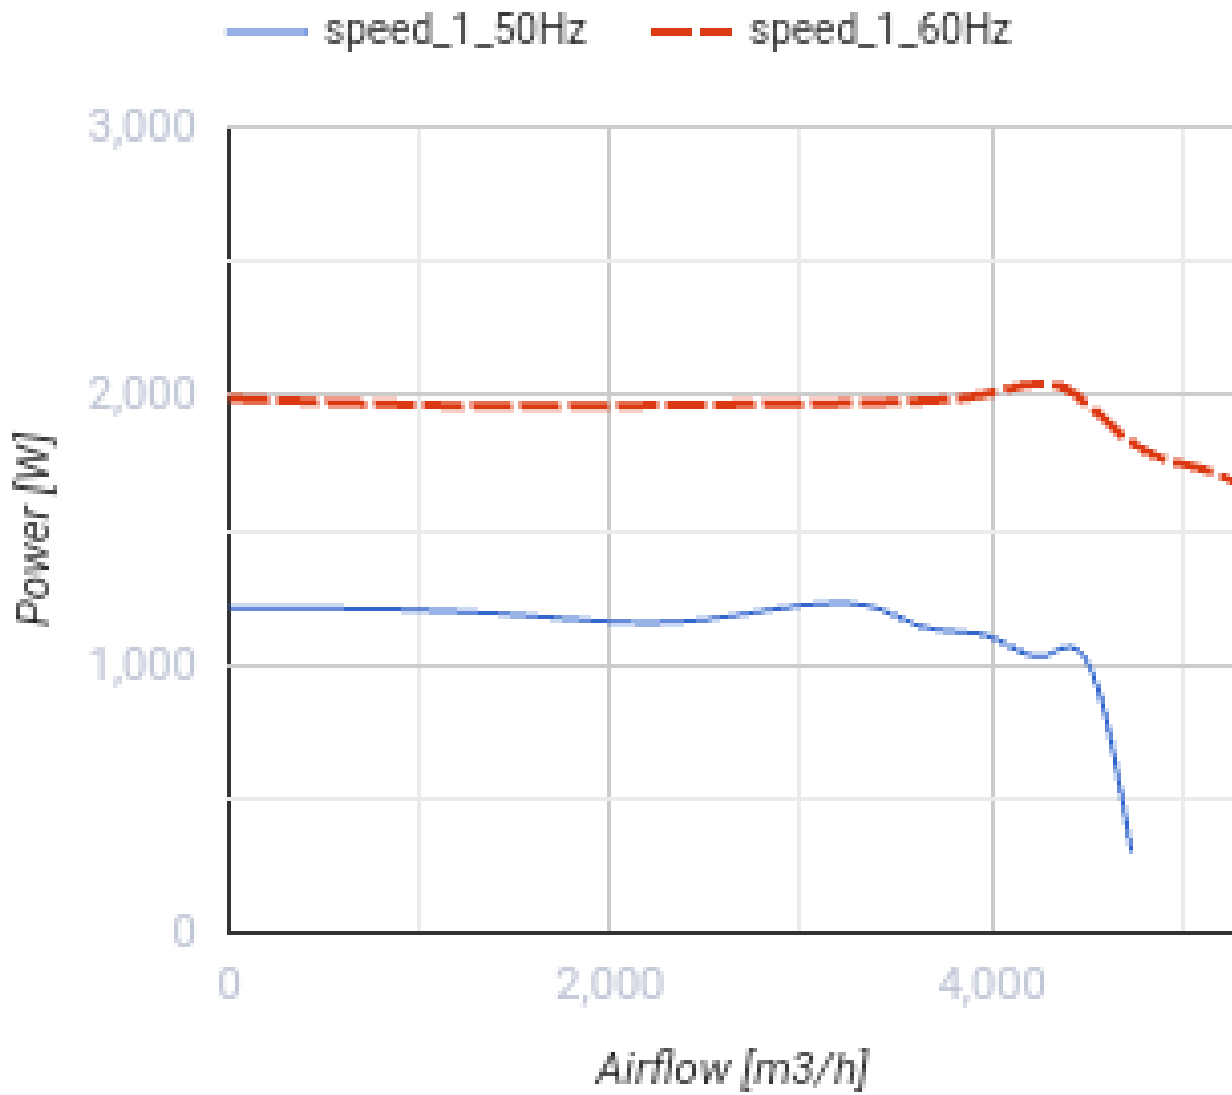

Dimensions

∅ D	B	B1	H	H1	L	L1	L2	L3	L4
315	690	550	708	600	715	700	650	672	327

