


## Iso-K 400 4E

Sound-insulated inline fans

- Maximum airflow: 5392
- Sound pressure level LpA at 3 m: 54
- Fire resistance class: 120°C within 60 min
- Sound insulation
- Motor type: AC
- Impeller type: Centrifugal backward curved blades
- Casing material: Galvanized steel

|                                   | Unit of measurement | Iso-K 400 4E |
|-----------------------------------|---------------------|--------------|
| Connected air duct size           | mm                  | 400          |
| Speed                             | -                   | 1            |
| Minimum supply voltage            | V                   | 230          |
| Maximum supply voltage            | V                   | 230          |
| Power supply frequency            | Hz                  | 50           |
| Rated power                       | W                   | 1048         |
| Unit current                      | A                   | 5            |
| Maximum airflow                   | m <sup>3</sup> /h   | 5392         |
| Sound pressure level LpA at 3 m   | dB(A)               | 54           |
| Weight                            | kg                  | 92           |
| Transported air temperature (max) | °C                  | 110          |
| Transported air temperature (min) | °C                  | -20          |
| Ingress protection rating         | -                   | IP54         |

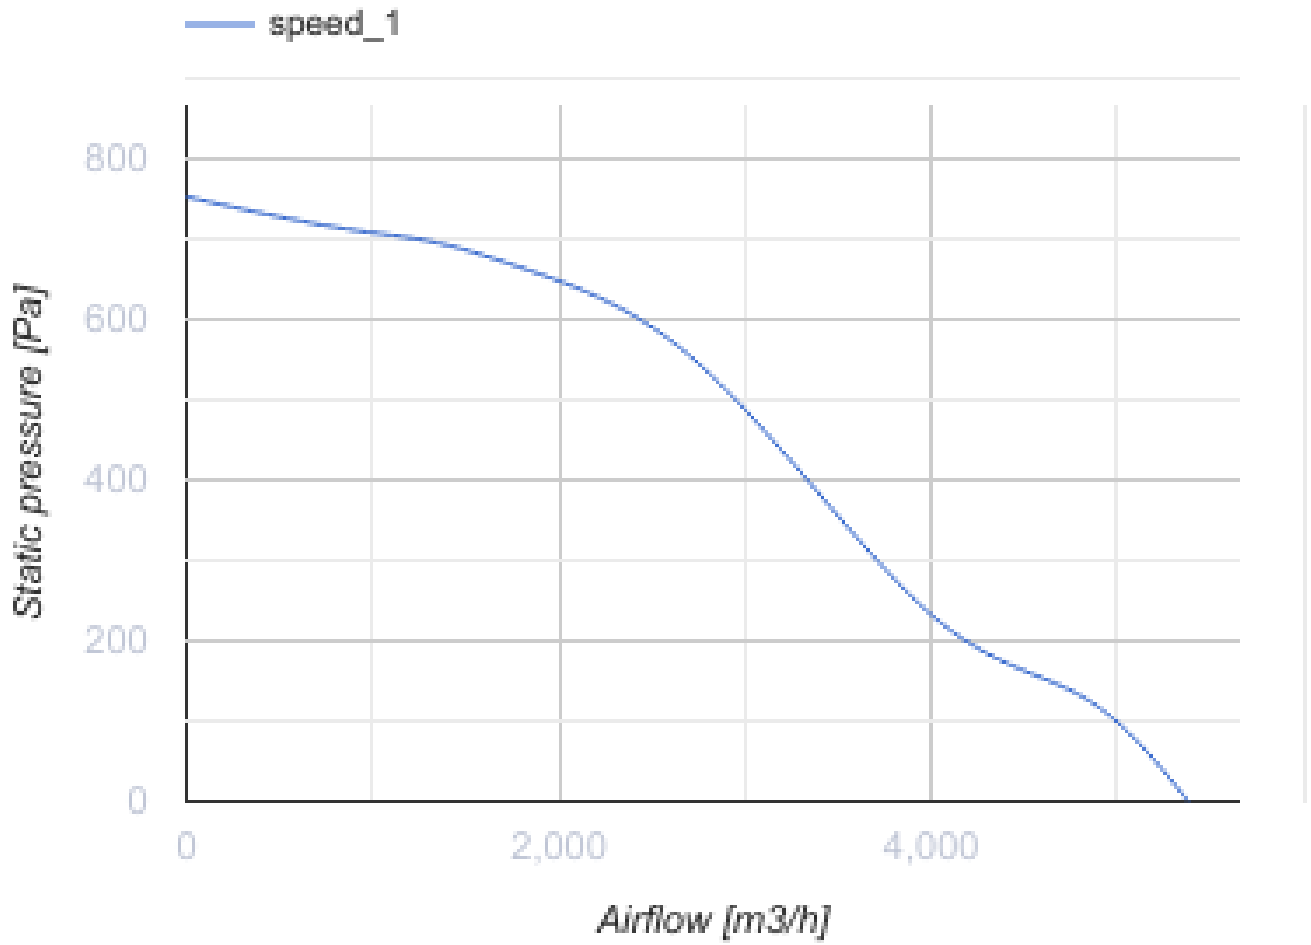

### Dimensions

| ∅ D | B   | B1  | H   | H1  | L   | L1  | L2  | L3  | L4  |
|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|
| 400 | 906 | 700 | 900 | 790 | 908 | 900 | 850 | 747 | 402 |

