




Iso-K 400 6D

Sound-insulated inline fans

- Maximum airflow: 2966
- Sound pressure level LpA at 3 m: 47
- Fire resistance class: 120°C within 60 min
- Sound insulation
- Motor type: AC
- Impeller type: Centrifugal backward curved blades
- Casing material: Galvanized steel

| | Unit of measurement | Iso-K 400 6D |
|-----------------------------------|---------------------|--------------|
| Connected air duct size | mm | 400 |
| Speed | - | 1 |
| Minimum supply voltage | V | 400 |
| Maximum supply voltage | V | 400 |
| Power supply frequency | Hz | 50 |
| Rated power | W | 357 |
| Unit current | A | 0.92 |
| Maximum airflow | m ³ /h | 2966 |
| Sound pressure level LpA at 3 m | dB(A) | 47 |
| Weight | kg | 87 |
| Transported air temperature (max) | °C | 110 |
| Transported air temperature (min) | °C | -20 |
| Ingress protection rating | - | IP54 |

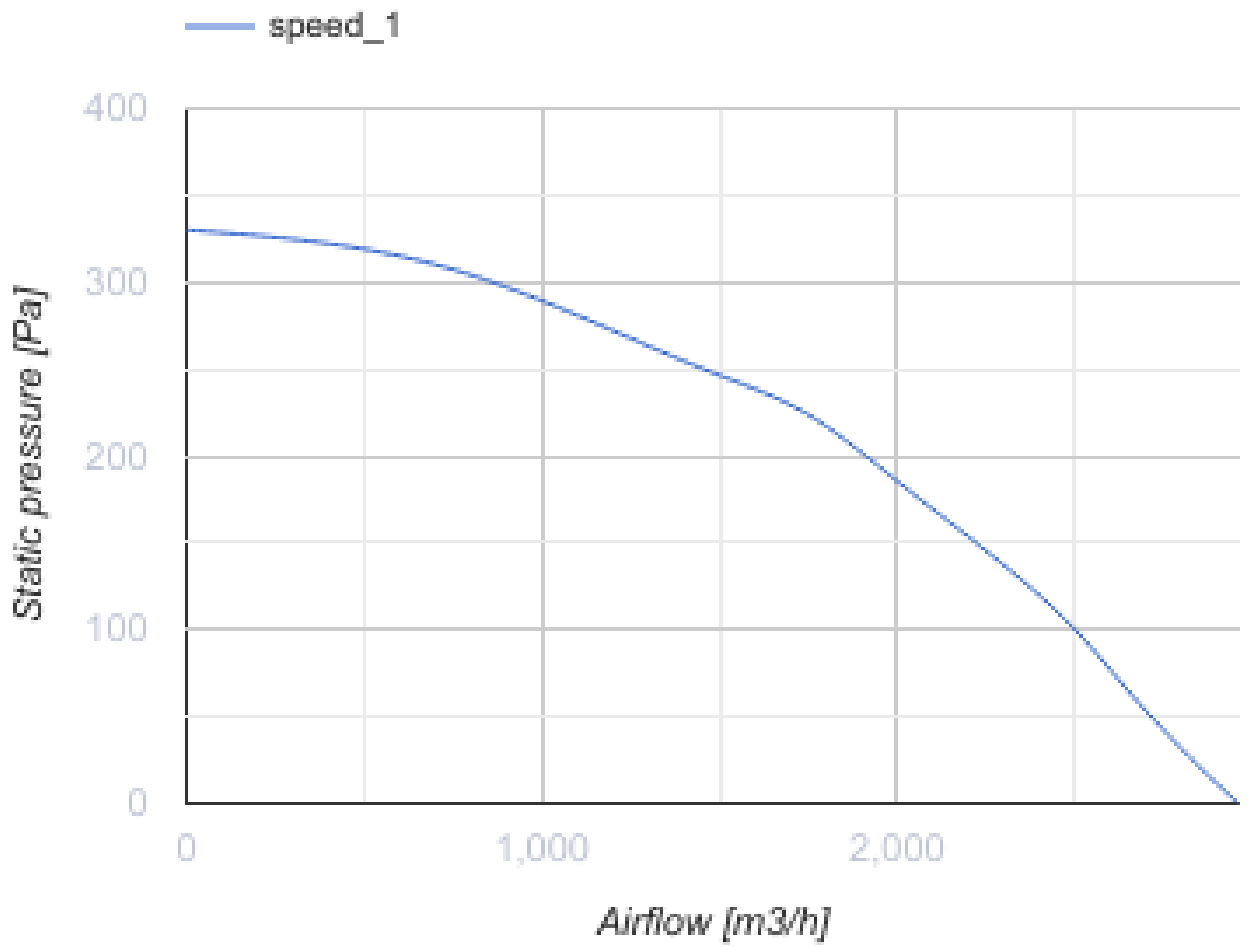

Dimensions

| Ø D | B | B1 | H | H1 | L | L1 | L2 | L3 | L4 |
|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|
| 400 | 906 | 700 | 900 | 790 | 908 | 900 | 850 | 687 | 402 |



