




Iso-K 450 4E

Kitchen inline fans in sound-insulated casings with operational temperature of 120 °C

- Maximum airflow: 8138
- Sound pressure level LpA at 3 m: 57
- Fire resistance class: 120°C within 60 min
- Sound insulation
- Motor type: AC
- Impeller type: Centrifugal backward curved blades
- Casing material: Galvanized steel

| | Unit of measurement | Iso-K 450 4E |
|-----------------------------------|---------------------|--------------|
| Connected air duct size | mm | 450 |
| Speed | - | 1 |
| Minimum supply voltage | V | 230 |
| Maximum supply voltage | V | 230 |
| Power supply frequency | Hz | 50 |
| Rated power | W | 1570 |
| Unit current | A | 7.25 |
| Maximum airflow | m ³ /h | 8138 |
| Sound pressure level LpA at 3 m | dB(A) | 57 |
| Weight | kg | 109 |
| Transported air temperature (max) | °C | 110 |
| Transported air temperature (min) | °C | -20 |
| Ingress protection rating | - | IP54 |

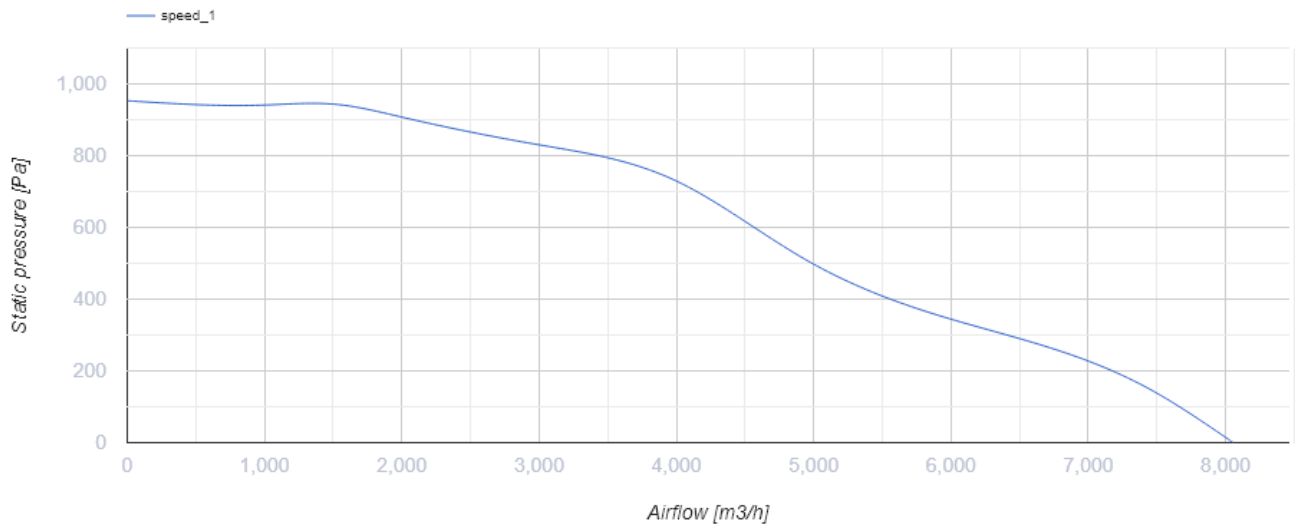

Dimensions

| Ø D | B | B1 | H | H1 | L | L1 | L2 | L3 | L4 |
|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|
| 450 | 996 | 750 | 980 | 870 | 925 | 900 | 850 | 782 | 437 |

