


Iso-Mix 150 TW1

Mixed-flow inline fans in sound-insulated casings




- Maximum airflow: 550
- Sound pressure level LpA at 3 m: 33
- Sound insulation
- Motor type: AC
- Impeller type: Mixed-flow
- Casing material: Coated steel
- Installation in any position
- Cable with mains plug
- Timer: Turn off timer

| | Unit of measurement | Iso-Mix 150 TW1 | |
|--|---------------------|-----------------|------|
| Connected air duct size | mm | 150 | |
| Speed | - | 2 | |
| Phases | - | 1 | |
| Minimum supply voltage | V | 230 | |
| Maximum supply voltage | V | 230 | |
| Power supply frequency | Hz | 50/60 | |
| Rated power | W | 45 | 52 |
| Unit current | A | 0.2 | 0.23 |
| Maximum airflow | m ³ /h | 410 | 550 |
| rotation speed at 50hz | - | 1985 | 2640 |
| Sound pressure level LpA at 3 m | dB(A) | 26 | 33 |
| Weight | kg | 6.1 | |
| Transported air temperature (max) | °C | 60 | |
| Ingress protection rating | - | IPX4 | |
| Ingress protection rating of the drive | - | IP44 | |

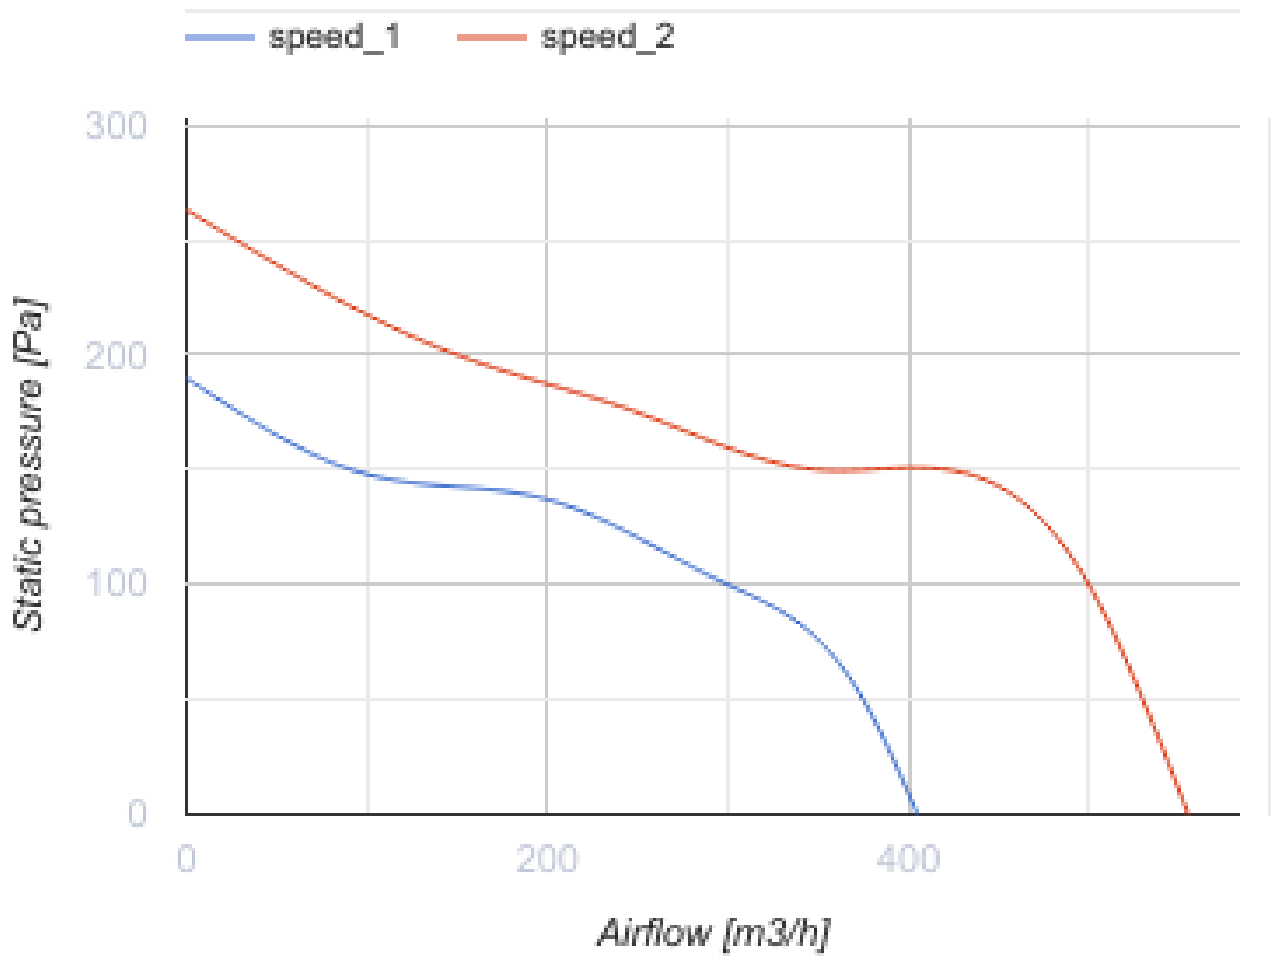

Dimensions

| ØD | B | B1 | L | H |
|-----|-----|-----|-----|-----|
| 148 | 247 | 273 | 579 | 263 |

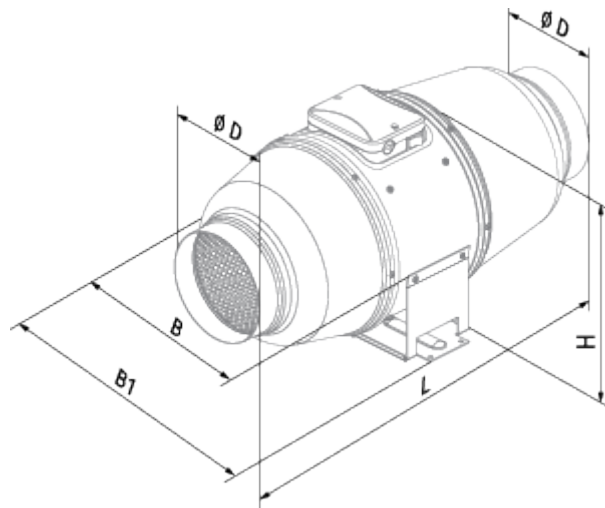




Ecodesign




| | | | | | | |
|---|----------------------|----|---------|---|------|---|
| Trademark | Blauberg | | | | | |
| Model | Iso-Mix 150 TW1 | | | | | |
| Specific energy consumption (SEC) (kWh/(m ² /a)) | Cold | | Average | | Warm | |
| | 52.8 | A+ | 25.7 | C | 10.2 | E |
| Type of ventilation unit | Unidirectional | | | | | |
| Type of drive installed | Multi-speed | | | | | |
| Type of heat recovery system | None | | | | | |
| Maximum flow rate (m ³ /h) | 470 | | | | | |
| Electric power input (W) | 52 | | | | | |
| Reference flow rate (m ³ /s) | 0.091 | | | | | |
| Reference pressure difference (Pa) | 50 | | | | | |
| Specific power input (SPI) (W/(m ³ /h)) | 0.137 | | | | | |
| Control typology | Local demand control | | | | | |
| Maximum external leakage rates (%) | 2.7 | | | | | |
| Declared typology | RVU UVU | | | | | |
| Sound power level (dB(A)) | 33 | | | | | |
| The annual electricity consumption (AEC) (kWh/a) | Cold | | Average | | Warm | |
| | 102 | | 102 | | 102 | |
| The annual heating saved (AHS) (kWh/a) | Cold | | Average | | Warm | |
| | 5536 | | 2830 | | 1280 | |





Accessories

Other accessories





| Name | Photo | Description |
|--------------------------|---|----------------------------|
| CDP-2/5 |  | Multi-speed switch |
| CDT E0.5 |  | Thyristor speed controller |
| CDT E1.8 |  | Thyristor speed controller |

| | | |
|--------------------------|---|--------------------|
| CDP-2/10 |  | Multi-speed switch |
|--------------------------|---|--------------------|



Other accessories

| Name | Photo | Description |
|---------------------------------|---|-------------|
| TE / TI 1.5 |  | Timers |
| HSE / HSI 1.5 |  | Sensors |
| LSE / LSI 1.5 |  | Sensors |
| IRSE / IRSI 1.5 |  | Sensors |

Other accessories











| Name | Photo | Description |
|-----------------------------|---|--|
| KFBT 150 G4 |  | Filter boxes with pocket filters for round ducts |
| KFBK 150 |  | Filter boxes for round ducts |
| KFBT 150 F5 |  | Filter boxes with pocket filters for round ducts |
| KFBT 150 F7 |  | Filter boxes with pocket filters for round ducts |

Other accessories


| Name | Photo | Description |
|-----------------------------|---|---------------------------|
| SD 150/1200 |  | Silencers for round ducts |
| SD 150/900 |  | Silencers for round ducts |

| | | |
|----------------------------|---|---------------------------|
| SD 150/600 |  | Silencers for round ducts |
|----------------------------|---|---------------------------|

Other accessories

| Name | Photo | Description |
|-----------------------------|---|---|
| EKH 150-1.2 |  | Duct electrical heaters for round ducts |
| EKH 150-1.7 |  | Duct electrical heaters for round ducts |
| EKH 150-2.0 |  | Duct electrical heaters for round ducts |
| EKH 150-2.4 |  | Duct electrical heaters for round ducts |
| EKH 150-3.4 |  | Duct electrical heaters for round ducts |
| EKH 150-3.6 |  | Duct electrical heaters for round ducts |
| EKH 150-5.1 |  | Duct electrical heaters for round ducts |
| EKH 150-6.0 |  | Duct electrical heaters for round ducts |
| WKH 150-2 |  | Duct water heaters for round ducts |
| WKH 150-4 |  | Duct water heaters for round ducts |

Other accessories

| Name | Photo | Description |
|-------------------------|---|---|
| VRV 150 |  | Backdraft dampers with spring for round ducts |

[VKA 150](#)



Air dampers for round ducts