



ISO-RB EC 250

Sound-insulated inline centrifugal fans




- Maximum airflow: 1099
- Sound pressure level LpA at 3 m: 45
- Sound insulation
- Motor type: EC
- Impeller type: Centrifugal backward curved blades
- Casing material: Aluzinc
- Installation in any position

	Unit of measurement	ISO-RB EC 250
Connected air duct size	mm	250
Speed	-	1
Minimum supply voltage	V	230
Maximum supply voltage	V	230
Power supply frequency	Hz	50/60
Rated power	W	164
Unit current	A	1.32
Maximum airflow	m ³ /h	1099
Sound pressure level LpA at 3 m	dB(A)	45
Weight	kg	27
Transported air temperature (max)	°C	55
Transported air temperature (min)	°C	-25
Ingress protection rating	-	IPX4
Ingress protection rating of the drive	-	IP55

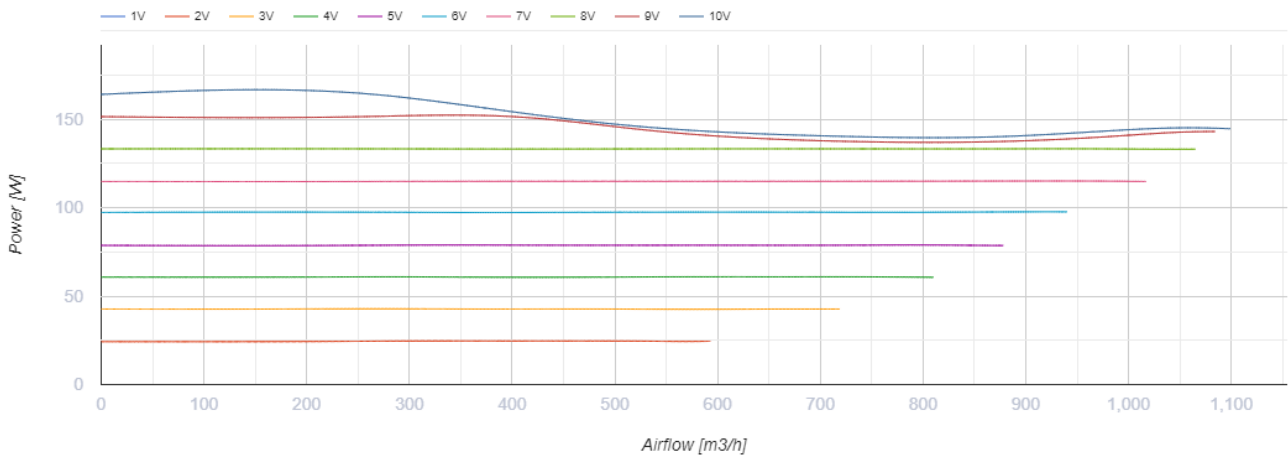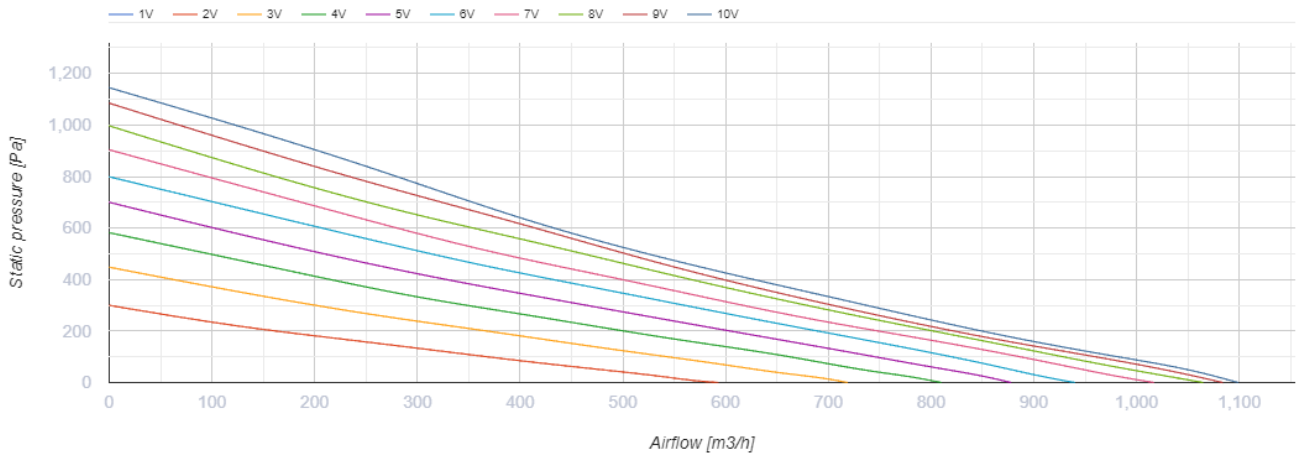


Dimensions

ØD	B	B1	B2	H	L1	L2
248	665	487	762	371	709	616

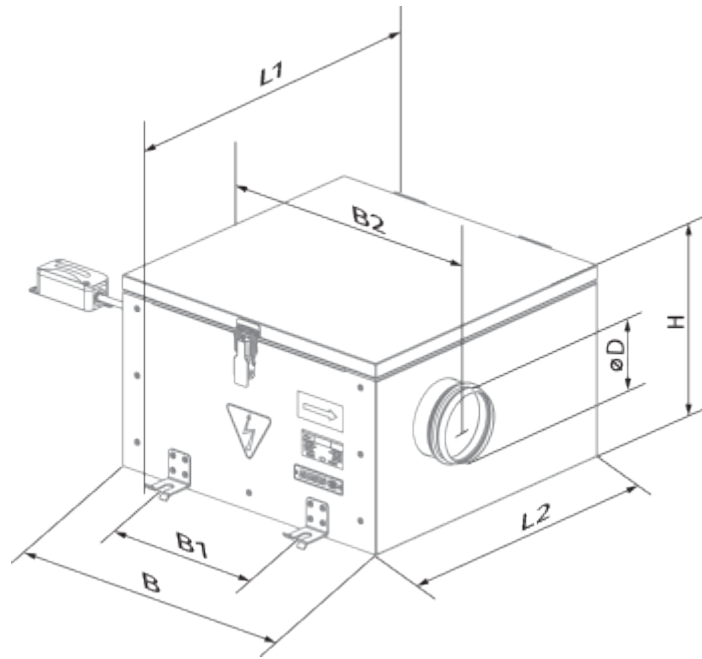

Ecodesign

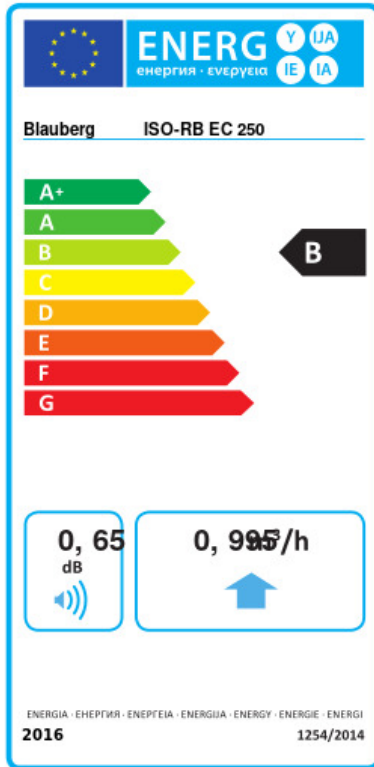

Trademark	Blauberg			
Model	ISO-RB EC 250			
Specific energy consumption (SEC) (kWh/(m ² /a))	Cold		Average	
	-54.6	A+	-27.5	B
Type of ventilation unit	Average		Warm	
	-12	E		
Type of ventilation unit	Unidirectional			
Type of drive installed	Variable speed			
Type of heat recovery system	None			
Maximum flow rate (m ³ /h)	995			
Electric power input (W)	140.5			
Reference flow rate (m ³ /s)	0.193			
Reference pressure difference (Pa)	50			
Specific power input (SPI) (W/(m ³ /h))	0.061			
Control typology	Local demand control			
Maximum external leakage rates (%)	2.7			
Declared typology	RVU UVU			
Sound power level (dB(A))	65			
The annual electricity consumption (AEC) (kWh/a)	Cold		Average	
	32	32	Warm	
The annual heating saved (AHS) (kWh/a)	Cold		Average	
	5536	2830	1280	




Accessories

Other accessories

Name	Photo	Description
CDT E/0-10		Speed control for EC motors

Other accessories

Name	Photo	Description
TE / TI 1.5		Timers

HSE / HSI 1.5		Sensors
LSE / LSI 1.5		Sensors
IRSE / IRSI 1.5		Sensors