
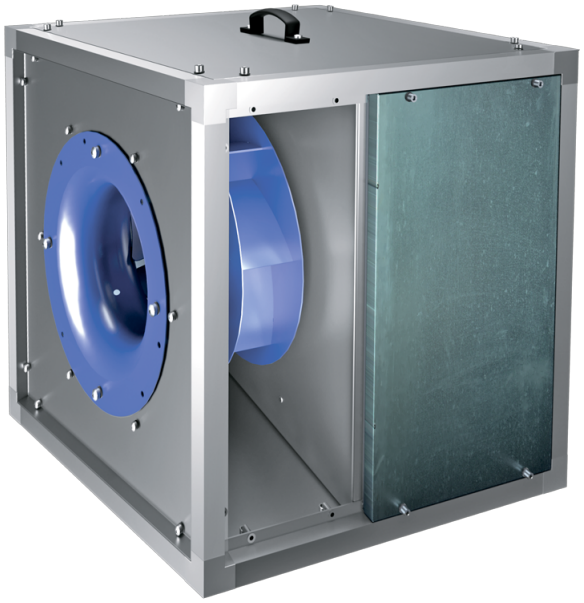


# Iso-VK 315 4D (400/60)

Kitchen inline fans in sound-insulated casings with operational temperature of 120 °C


- Sound-insulated casing
- Impeller type: Centrifugal impeller with backward curved blades
- Casing material: Aluzinc
- Installation in any position


| | Unit of measurement | Iso-VK 315 4D (400/60) |
|---|---|---|
| Phases | - | 3 |
| Minimum supply voltage | V | 400 |
| Maximum supply voltage | V | 400 |
| Power supply frequency | Hz | 60 |
| Weight | kg | 37.2 |
| Transported air temperature (max) | °C | 120 |
| Transported air temperature (min) | °C | -25 |
| Maximum transported air temperature | - | 120°C CONTINUOUS |
| Ingress protection rating | - | IPX4 |
| Impeller material | - | Steel |
| Size | mm | 315 |

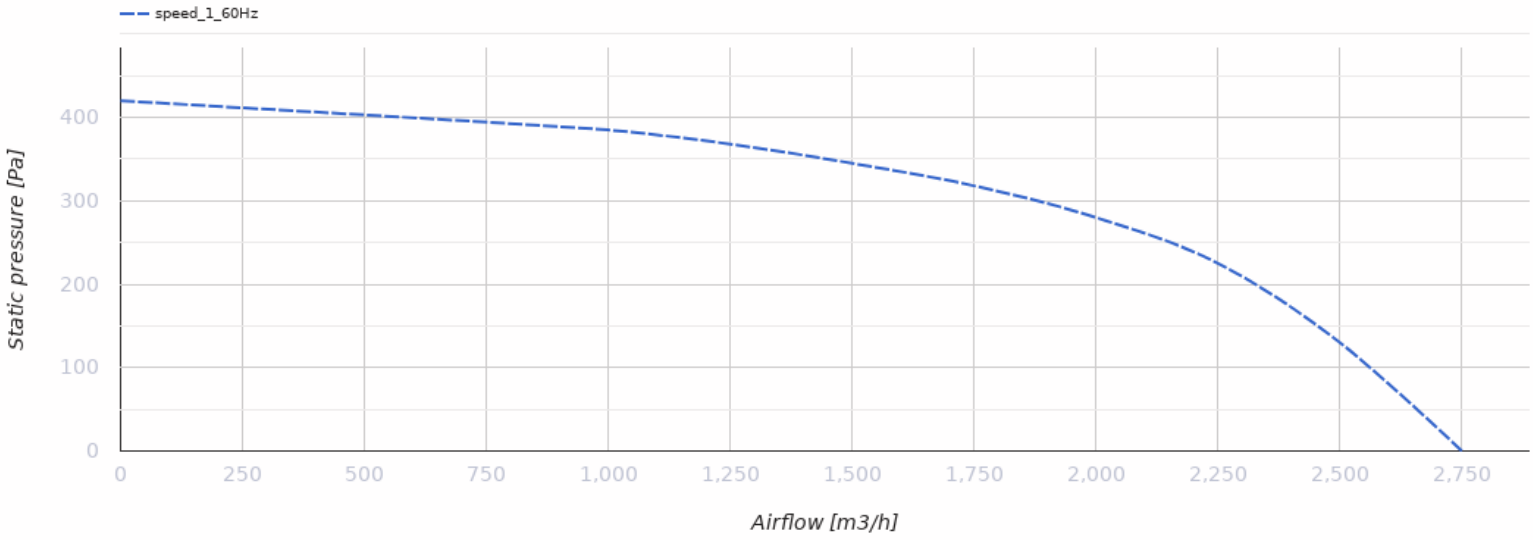



## Dimensions

| H | H1 | L | L1 | W | W1 | W2 | H2 |
|---|---|---|---|---|---|---|---|
| 500 | 538 | 500 | 538 | 500 | 538 | 200 | 440 |

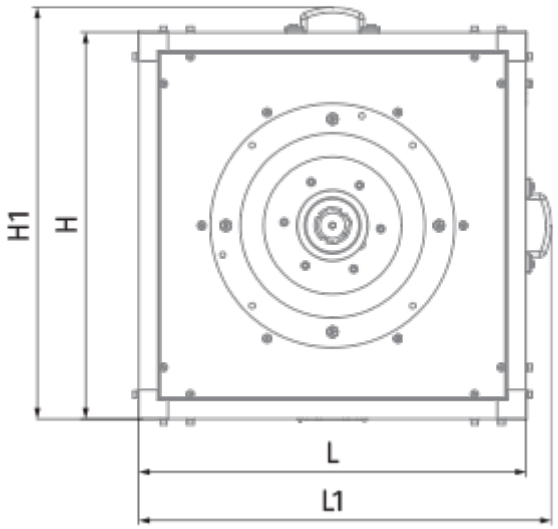

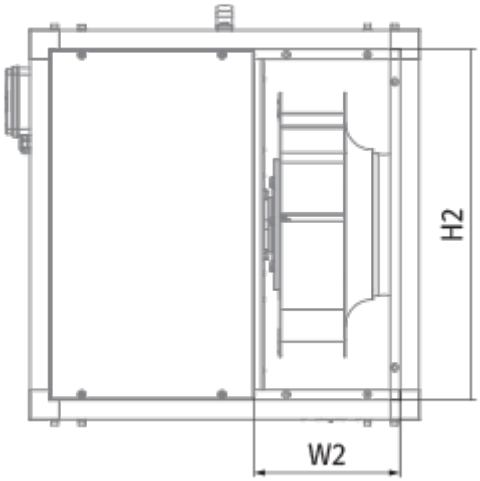
H2
W2

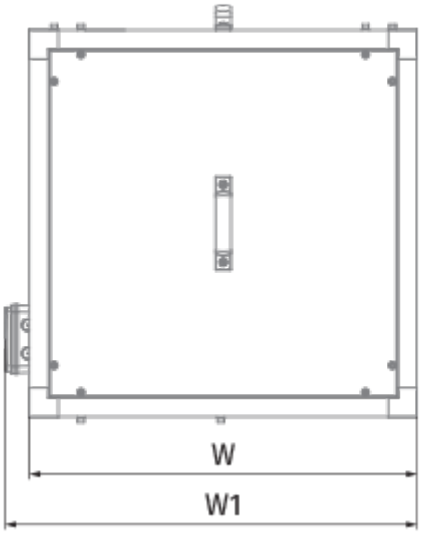
W
W1