


## Iso-VK 355 4D

Kitchen sound-insulated inline centrifugal fans with AC motors



- Maximum airflow: 3200
- Sound pressure level LpA at 3 m: 58
- Sound insulation
- Motor type: AC
- Impeller type: Centrifugal impeller with backward curved blades
- Casing material: Aluzinc
- Installation in any position

	Unit of measurement	Iso-VK 355 4D
Connected air duct size	mm	355
Speed	-	1
Phases	-	3
Minimum supply voltage	V	400
Maximum supply voltage	V	400
Power supply frequency	Hz	50
Rated power	W	370
Unit current	A	1.1
Maximum airflow	m <sup>3</sup> /h	3200
rotation speed at 50hz	-	1375
Sound pressure level LpA at 3 m	dB(A)	58
Weight	kg	48.1
Transported air temperature (max)	°C	120
Transported air temperature (min)	°C	-25
Ingress protection rating	-	IPX4

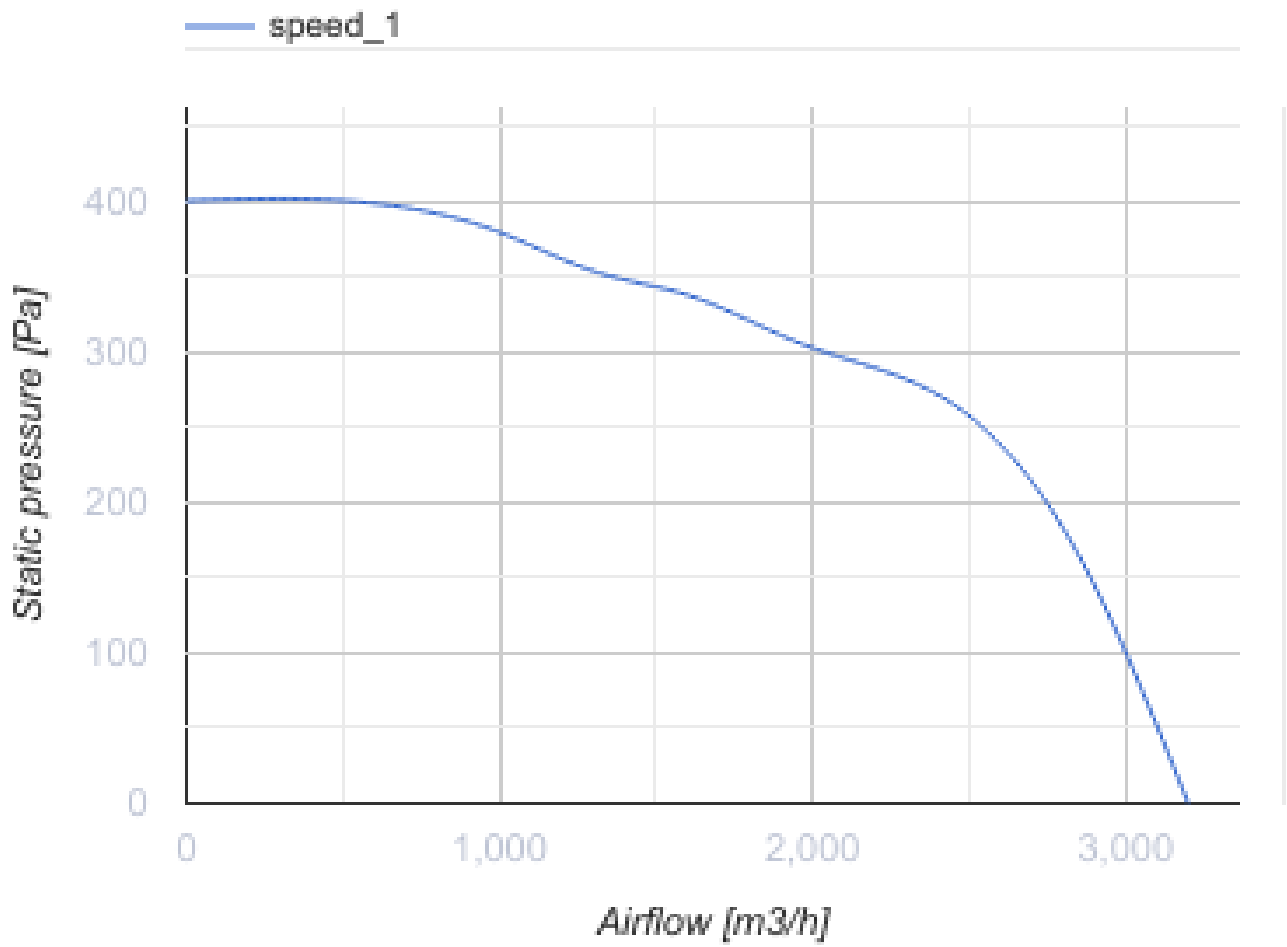


## Dimensions

H	H1	H2	L	L1	W	W1	W2
600	638	540	600	638	600	638	225

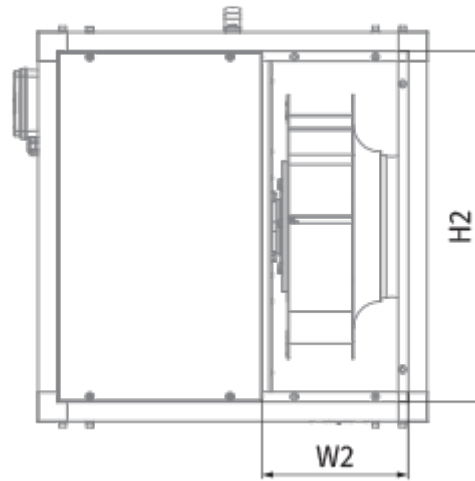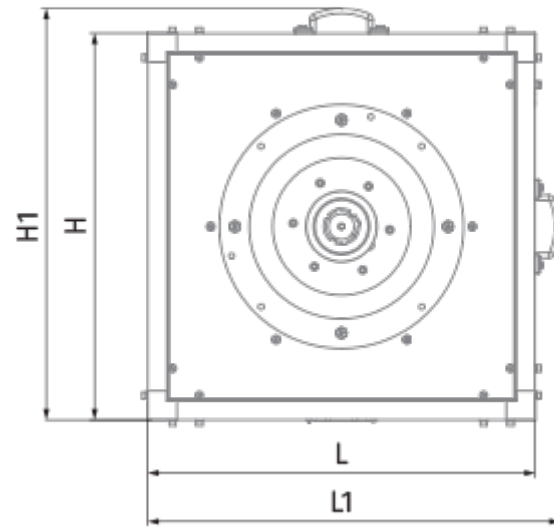

## Accessories

### Thyristor speed controllers

Name	Photo	Description
<a href="#">CDT E1.8</a>		Thyristor speed controller