




## Iso-VK 355 4D

Sound-insulated inline centrifugal fans


- Maximum airflow: 3200
- Sound pressure level LpA at 3 m: 58
- Sound insulation
- Motor type: AC
- Impeller type: Centrifugal backward curved blades
- Casing material: Aluzinc
- Installation in any position



|                                   | Unit of measurement | Iso-VK 355 4D |
|-----------------------------------|---------------------|---------------|
| Connected air duct size           | mm                  | 355           |
| Speed                             | -                   | 1             |
| Phases                            | -                   | 3             |
| Minimum supply voltage            | V                   | 400           |
| Maximum supply voltage            | V                   | 400           |
| Power supply frequency            | Hz                  | 50            |
| Rated power                       | W                   | 370           |
| Unit current                      | A                   | 1.1           |
| Maximum airflow                   | m <sup>3</sup> /h   | 3200          |
| rotation speed at 50hz            | -                   | 1375          |
| Sound pressure level LpA at 3 m   | dB(A)               | 58            |
| Weight                            | kg                  | 48.1          |
| Transported air temperature (max) | °C                  | 120           |
| Transported air temperature (min) | °C                  | -25           |
| Ingress protection rating         | -                   | IPX4          |

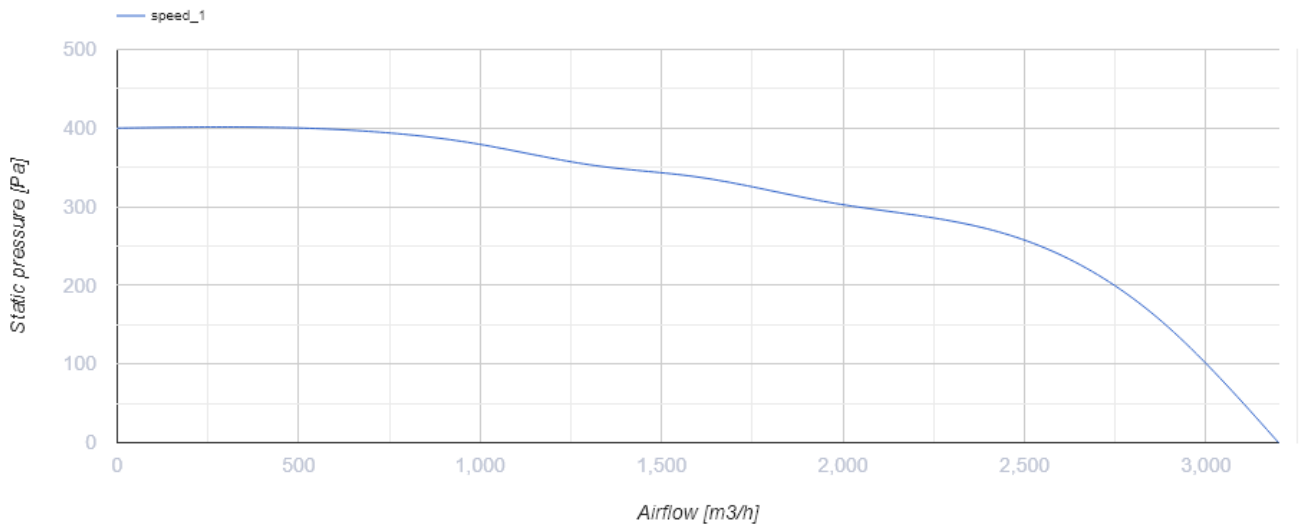

## Dimensions


| H   | H1  | H2  | L   | L1  | W   | W1  | W2  |
|-----|-----|-----|-----|-----|-----|-----|-----|
| 600 | 638 | 540 | 600 | 638 | 600 | 638 | 225 |

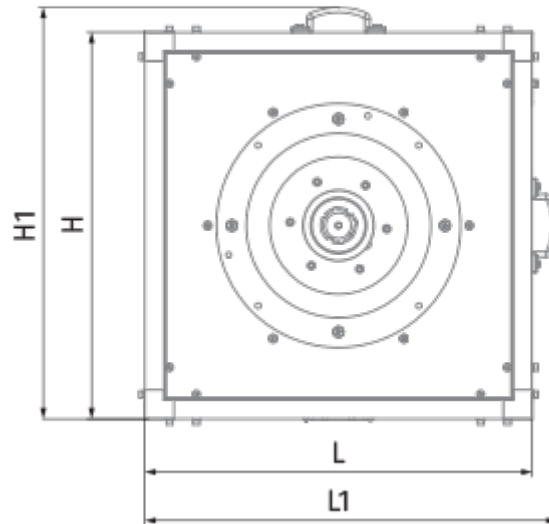

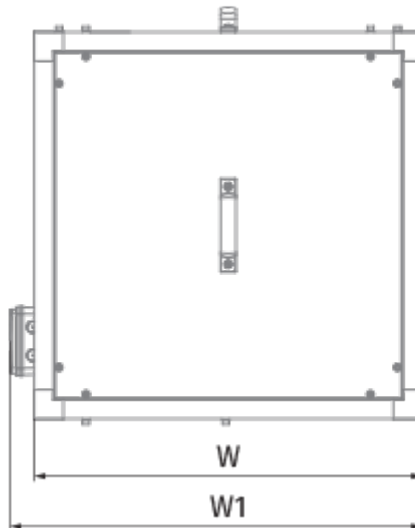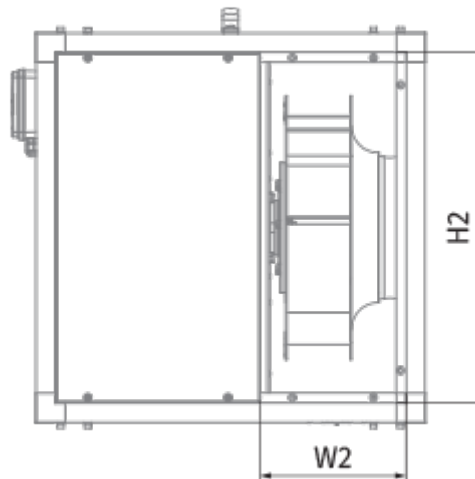

## Accessories

### Other accessories

| Name                     | Photo   | Description                |
|--------------------------|---|----------------------------|
| <a href="#">CDT E1.8</a> |  | Thyristor speed controller |