



# KOMFORT LE 1200-9

Heat recovery air handling units


- Power of electrical reheater: 9000
- Maximum airflow: 1200
- Sound pressure level LpA at 3 m: 60
- Heat exchanger type: Cross flow
- Extract filter: G4
- Supply filter: G4
- Sound insulation
- Motor type: AC
- Reheater: Electric
- Control: Wired control panel
- Casing material: Galvanized steel

	Unit of measurement	KOMFORT LE 1200-9
Connected air duct size	mm	249
Speed	-	1
Phases	-	3
Minimum supply voltage	V	230
Maximum supply voltage	V	230
Power supply frequency	Hz	50/60
Rated power	W	820
Power of electrical reheater	W	9000
Unit current	A	16.6
Maximum airflow	m <sup>3</sup> /h	1200
Sound pressure level LpA at 3 m	dB(A)	60
Heat recovery efficiency, max	%	77
Heat exchanger type	-	Cross flow
Heat exchanger material	-	Polystyrene
Weight	kg	85
Extract filter	-	G4
Supply filter	-	G4
Transported air temperature (max)	°C	40
Transported air temperature (min)	°C	-25
Ambient air temperature min	°C	1
Ambient air temperature max	°C	40

Ambient air humidity max	%	80
Ingress protection rating	-	IP22
Ingress protection rating of the drive	-	IP44

## Dimensions

ØD	B	B1	H	H1	L	L1	L2
249	613	460	698	832	1071	1117	1176

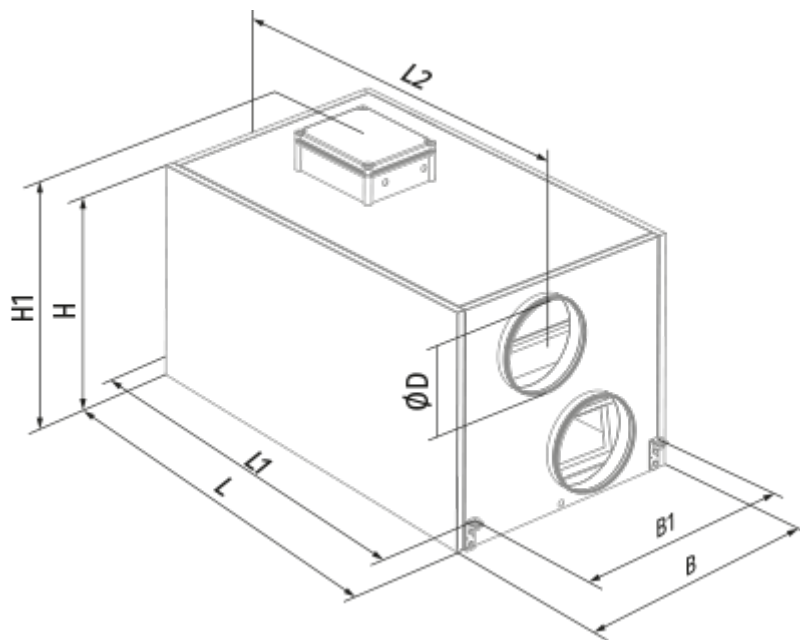







## Accessories

### Other accessories


Name	Photo	Description
FP 550x253x48 G4		G4 panel filter
SB C4 300/384		

### For round ducts

Name	Photo	Description
------	-------	-------------

<a href="#">SD 250/600</a>		Silencers for round ducts
<a href="#">SD 250/900</a>		Silencers for round ducts
<a href="#">SD 250/1200</a>		Silencers for round ducts
<a href="#">SDF 250/600</a>		Flexible silencers for round ducts
<a href="#">SDF 250/900</a>		Flexible silencers for round ducts
<a href="#">SDF 250/2000</a>		Flexible silencers for round ducts

#### For round ducts

Name	Photo	Description
<a href="#">VRV 250</a>		Backdraft dampers with spring for round ducts