

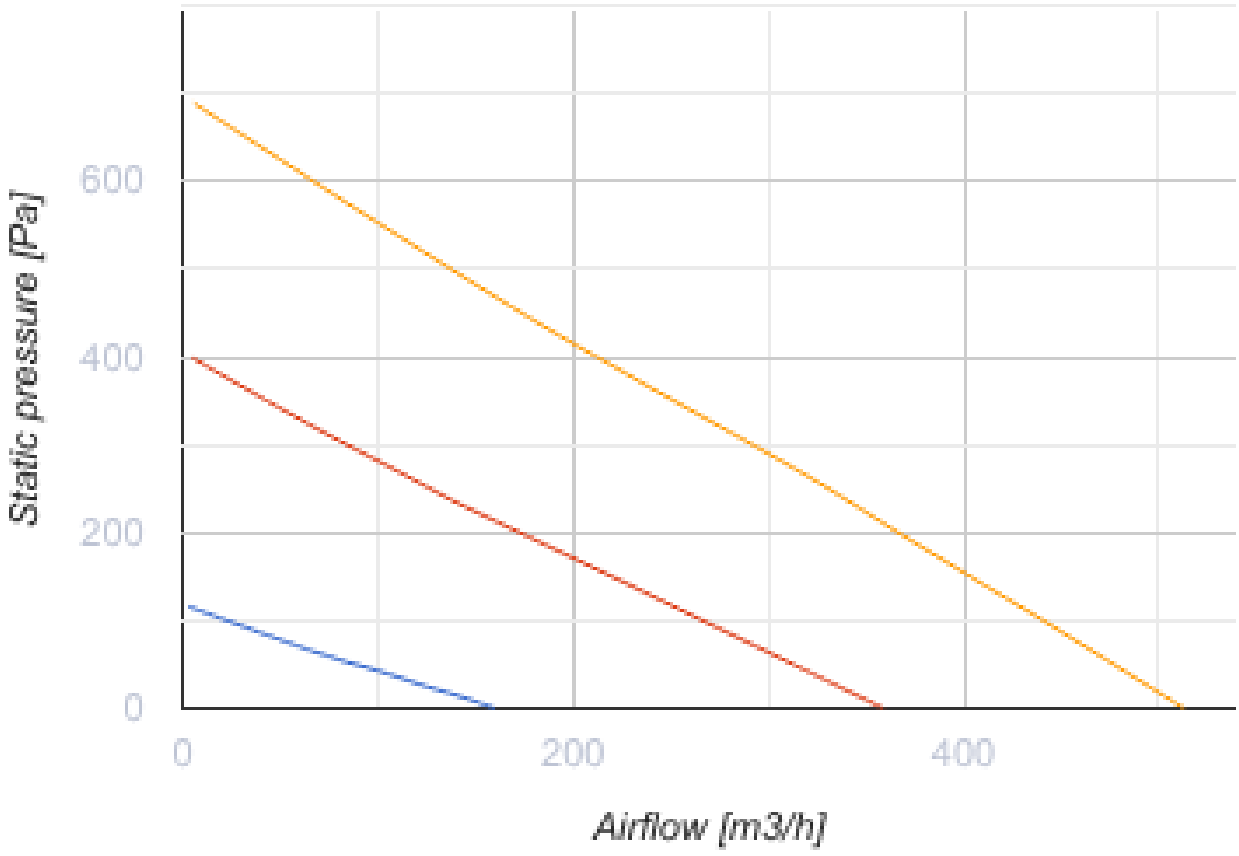
# KOMFORT Roto EC DE 351 R S21

Air handling units with rotary heat exchanger

- Power of electrical reheater: 1200
- Sound pressure level LpA at 3 m: 31
- Heat exchanger type: Condensation rotary
- Supply filter: G4 / Coarse > 60% (option F7 / ePM1 60%)
- Extract filter: G4 / Coarse > 60%
- Sound-insulated casing
- Bypass: Auto
- Reheater: Built-in
- BMS protocol: ModBus
- Control: Smartphone
- Casing material: Coated steel
- Humidity sensor: Optional
- CO2 sensor: Optional
- PM2.5 sensor: Optional

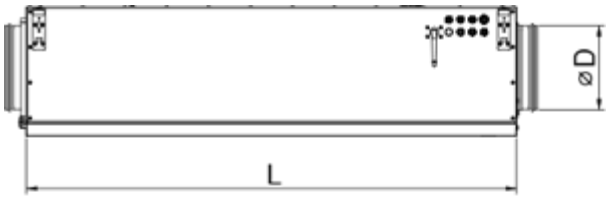
| | Unit of measurement | KOMFORT Roto EC DE 351 R S21 |
|---|---|---|
| Connected air duct size | mm | 200 |
| Phases | - | 1 |
| Minimum supply voltage | V | 230 |
| Maximum supply voltage | V | 230 |
| Power supply frequency | Hz | 50/60 |
| Rated power | W | 247 |
| Power of electrical reheater | W | 1200 |
| Unit current | A | 6.94 |
| Maximum airflow | m³/h | 513 |
| Sound pressure level LpA at 3 m | dB(A) | 31 |
| Heat recovery efficiency, max | % | 88 |
| Heat exchanger type | - | Condensation rotary |
| Weight | kg | 72 |
| Supply filter | - | G4 / Coarse > 60% (option F7 / ePM1 60%) |
| Extract filter | - | G4 / Coarse > 60% |
| Transported air temperature (max) | °C | 40 |
| Transported air temperature (min) | °C | -25 |
| Ambient air temperature min | °C | 1 |
| Ambient air temperature max | °C | 40 |
| Ingress protection rating | - | IP22 |
| Ambient air humidity max | % | 60 |

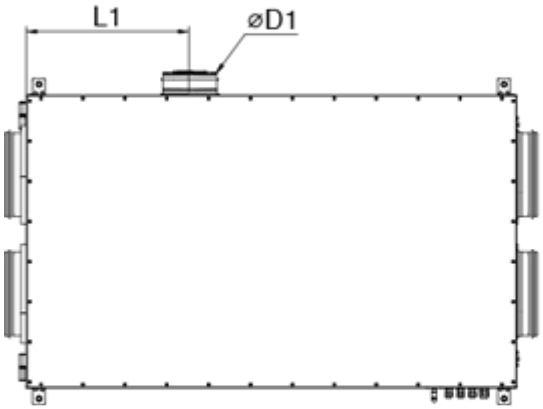
| | | |
|---|---|---|
| Ingress protection rating of the drive | - | IP44 |

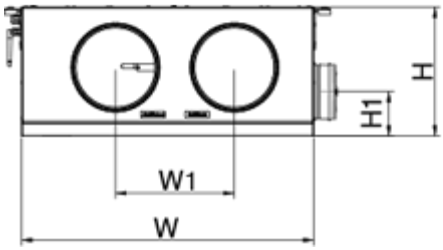



## Dimensions

| Ø D | Ø D1 | H | H1 | L | L1 | W | W1 |
|---|---|---|---|---|---|---|---|
| 200 | 125 | 308 | 106 | 1170 | 387 | 700 | 285 |


ØD
L


L1
ØD1


H
H1
W1
W

## Ecodesign

| Trademark | Blauberg | | | | | |
|---|---|---|---|---|---|---|
| Model | KOMFORT Roto EC DE 351 R S21 | | | | | |
| Specific energy consumption (SEC) (kWh/(m²/a)) | Cold | | Average | | Warm | |
| | -83.9 | A+ | -41 | A | -16.4 | E |
| Type of ventilation unit | Bidirectional | | | | | |
| Type of drive installed | Variable speed | | | | | |
| Type of heat recovery system | Regenerative | | | | | |
| Thermal efficiency of heat recovery (%) | 80 | | | | | |
| Maximum flow rate (m³/h) | 441 | | | | | |
| Electric power input (W) | 211 | | | | | |
| Reference flow rate (m³/s) | 0.087 | | | | | |
| Reference pressure difference (Pa) | 50 | | | | | |
| Specific power input (SPI) (W/(m³/h)) | 0.294 | | | | | |
| Control typology | Local demand control | | | | | |
| Maximum internal leakage rates (%) | 2.7 | | | | | |
| Maximum external leakage rates (%) | 2.7 | | | | | |
| Sound power level (dB(A)) | 51 | | | | | |
| The annual electricity consumption (AEC) (kWh/a) | Cold | | Average | | Warm | |
| | 156 | | 156 | | 156 | |
| The annual heating saved (AHS) (kWh/a) | Cold | | Average | | Warm | |
| | 8776 | | 4486 | | 2029 | |

## Accessories

### For round ducts

| Name | Photo | Description |
|---|---|---|
| SD 125/600 |  | Silencers for round ducts |
| SD 125/900 |  | Silencers for round ducts |

| | | |
|---|---|---|
| SD 125/1200 |  | Silencers for round ducts |

### For round ducts

| Name | Photo | Description |
|---|---|---|
| VKA 125 |  | Air dampers for round ducts |

### Control Panels

| Name | Photo | Description |
|---|---|---|
| S25 |  | LCD control panel |
| S22 |  | Control panels |
| S22 Wi-Fi |  | Control panels |

### CO2 sensors

| Name | Photo | Description |
|---|---|---|
| CD-1 |  | CO2 sensors |
| CD-3 |  | Carbon dioxide sensor |

### Humidity sensors

| Name | Photo | Description |
|---|---|---|
| FS2 |  | Humidity sensor |

### Electric actuators

| Name | Photo | Description |
|---|---|---|

| | | |
|---|---|---|
| Belimo TF230 |  | Electric actuators |

### Other accessories

| Name | Photo | Description |
|---|---|---|
| FP 302x256x48 ePM1 60% F7 |  | F7 panel filter |
| FP 302x256x48 Coarse 90% G4 |  | G4 panel filter |