




## Line 150 H

Extract fans


- Maximum airflow: 292
- Sound pressure level LpA at 3 m: 38
- Motor type: AC
- Casing material: Plastic
- Humidity sensor
- Timer: Turn off timer

|                                 | Unit of measurement | Line 150 H |
|---------------------------------|---------------------|------------|
| Connected air duct size         | mm                  | 150        |
| Speed                           | -                   | 1          |
| Minimum supply voltage          | V                   | 220        |
| Maximum supply voltage          | V                   | 240        |
| Power supply frequency          | Hz                  | 50         |
| Rated power                     | W                   | 24         |
| Unit current                    | A                   | 0.13       |
| Maximum airflow                 | m <sup>3</sup> /h   | 292        |
| Sound pressure level LpA at 3 m | dB(A)               | 38         |
| Weight                          | kg                  | 0.92       |
| Ambient air temperature min     | °C                  | 1          |
| Ambient air temperature max     | °C                  | 40         |
| Ingress protection rating       | -                   | IP34       |

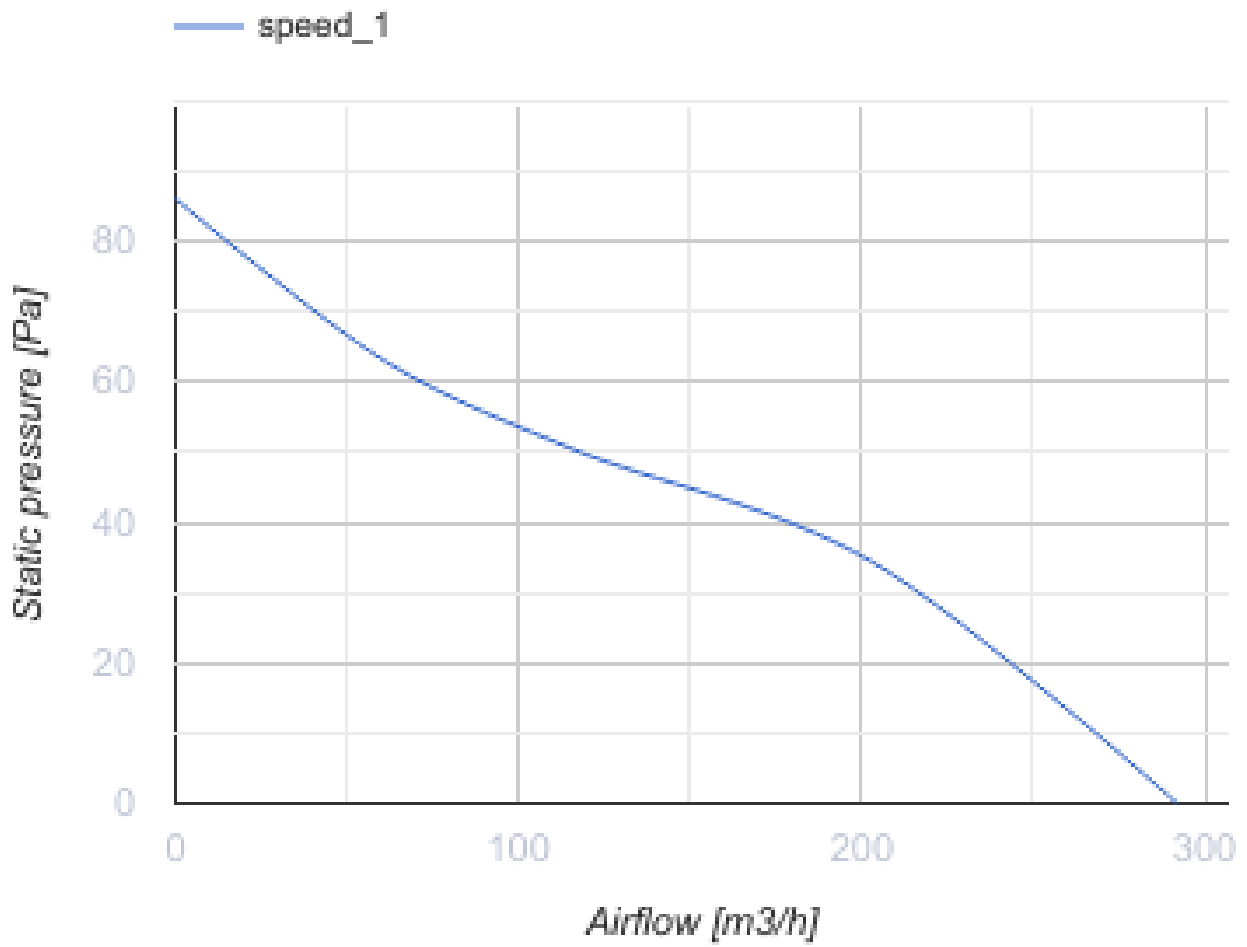

### Dimensions

| a   | b   | c   | ∅ d | e  |
|-----|-----|-----|-----|----|
| 205 | 165 | 132 | 150 | 13 |

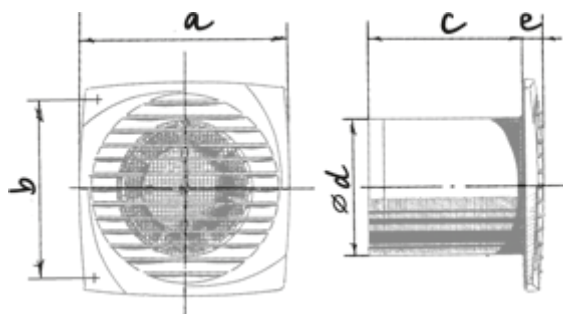

## Ecodesign



|   |                      |    |         |   |       |   |
|---|----------------------|----|---------|---|-------|---|
| Trademark   | Blauberg             |    |         |   |       |   |
| Model   | Line 150 H           |    |         |   |       |   |
| Specific energy consumption (SEC) (kWh/(m <sup>2</sup> /a)) | Cold                 |    | Average |   | Warm  |   |
|   | -54.3                | A+ | -27.2   | B | -11.7 | E |
| Type of ventilation unit                                    | Unidirectional       |    |         |   |       |   |
| Type of drive installed                                     | Multi-speed          |    |         |   |       |   |
| Type of heat recovery system                                | None                 |    |         |   |       |   |
| Maximum flow rate (m <sup>3</sup> /h)                       | 292                  |    |         |   |       |   |
| Electric power input (W)                                    | 24                   |    |         |   |       |   |
| Reference flow rate (m <sup>3</sup> /s)                     | 0.057                |    |         |   |       |   |
| Specific power input (SPI) (W/(m <sup>3</sup> /h))          | 0.053                |    |         |   |       |   |
| Control typology  | Local demand control |    |         |   |       |   |
| Maximum external leakage rates (%)                          | 2.7                  |    |         |   |       |   |
| Declared typology   | RVU UVU              |    |         |   |       |   |
| Sound power level (dB(A))                                   | 58                   |    |         |   |       |   |
| The annual electricity consumption (AEC) (kWh/a)            | Cold                 |    | Average |   | Warm  |   |
|   | 43                   |    | 43      |   | 43    |   |
| The annual heating saved (AHS) (kWh/a)                      | Cold                 |    | Average |   | Warm  |   |
|   | 5536                 |    | 2830    |   | 1280  |   |