




Line 150 TR

Extract fans


- Maximum airflow: 292
- Sound pressure level LpA at 3 m: 38
- Motor type: AC
- Casing material: Plastic
- Humidity sensor
- Timer: Turn off timer

| | Unit of measurement | Line 150 TR |
|---------------------------------|---------------------|-------------|
| Connected air duct size | mm | 150 |
| Speed | - | 1 |
| Minimum supply voltage | V | 220 |
| Maximum supply voltage | V | 240 |
| Power supply frequency | Hz | 50 |
| Rated power | W | 24 |
| Unit current | A | 0.13 |
| Maximum airflow | m ³ /h | 292 |
| Sound pressure level LpA at 3 m | dB(A) | 38 |
| Weight | kg | 0.92 |
| Ambient air temperature min | °C | 1 |
| Ambient air temperature max | °C | 40 |
| Ingress protection rating | - | IP34 |

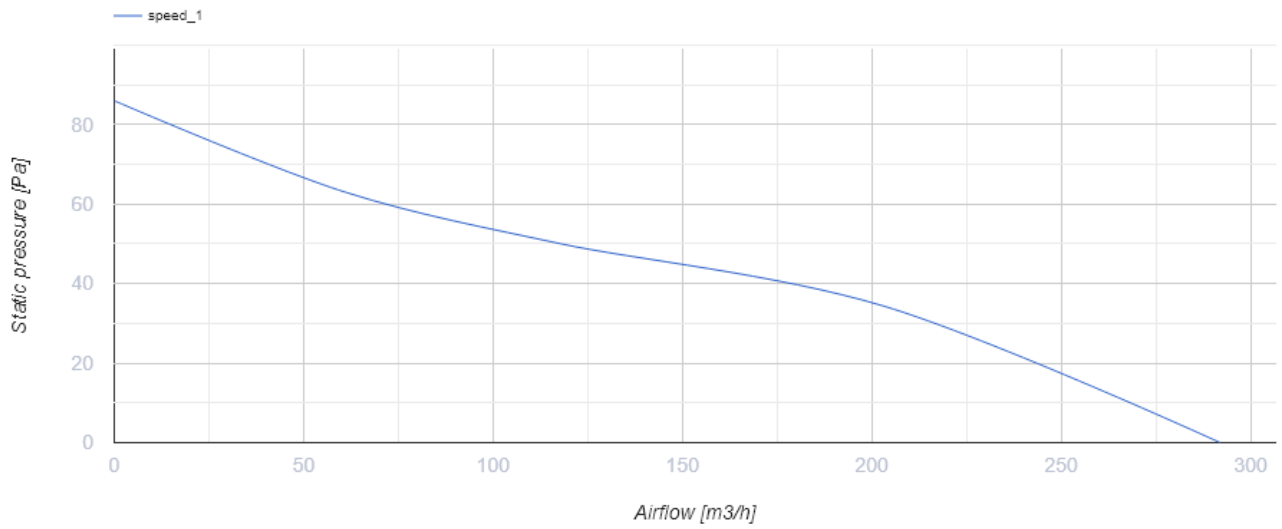

Dimensions

| a | b | c | ∅ d | e |
|-----|-----|-----|-----|----|
| 205 | 165 | 132 | 150 | 13 |

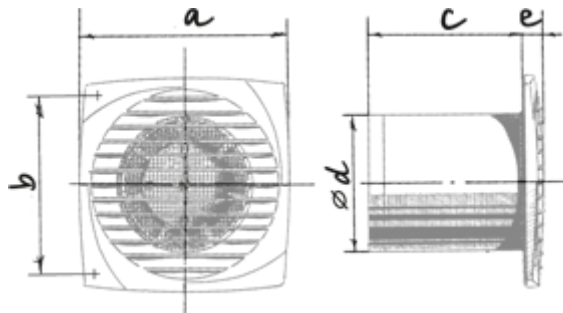

Ecodesign



| | | | | | | |
|---|----------------|---|---------|---|------|---|
| Trademark | Blauberg | | | | | |
| Model | Line 150 TR | | | | | |
| Specific energy consumption (SEC) (kWh/(m ² /a)) | Cold | | Average | | Warm | |
| | 31 | B | 14.6 | E | 5.2 | F |
| Type of ventilation unit | Unidirectional | | | | | |
| Type of drive installed | Single speed | | | | | |
| Type of heat recovery system | None | | | | | |
| Maximum flow rate (m ³ /h) | 292 | | | | | |
| Electric power input (W) | 24 | | | | | |
| Reference flow rate (m ³ /s) | 0.057 | | | | | |
| Specific power input (SPI) (W/(m ³ /h)) | 0.082 | | | | | |
| Control typology | Manual control | | | | | |
| Maximum external leakage rates (%) | 2.7 | | | | | |
| Sound power level (dB(A)) | 58 | | | | | |
| Declared typology | RVU UVU | | | | | |
| The annual electricity consumption (AEC) (kWh/a) | Cold | | Average | | Warm | |
| | 103 | | 103 | | 103 | |
| The annual heating saved (AHS) (kWh/a) | Cold | | Average | | Warm | |
| | 3355 | | 1715 | | 776 | |