



## Quatro 100 ST

Extract fans with decorative front panel

- Maximum airflow: 88
- Sound pressure level LpA at 3 m: 33
- Motor type: AC
- Pull cord
- Timer: Turn off timer


	Unit of measurement	Quatro 100 ST
Connected air duct size	mm	100
Speed	-	1
Minimum supply voltage	V	220
Maximum supply voltage	V	240
Power supply frequency	Hz	50
Rated power	W	14
Unit current	A	0.085
Maximum airflow	m <sup>3</sup> /h	88
Sound pressure level LpA at 3 m	dB(A)	33
Ingress protection rating	-	IP34

### Dimensions

a	a1	b	c	Ø d	e
171	151	108	128	100	32



## Ecodesign

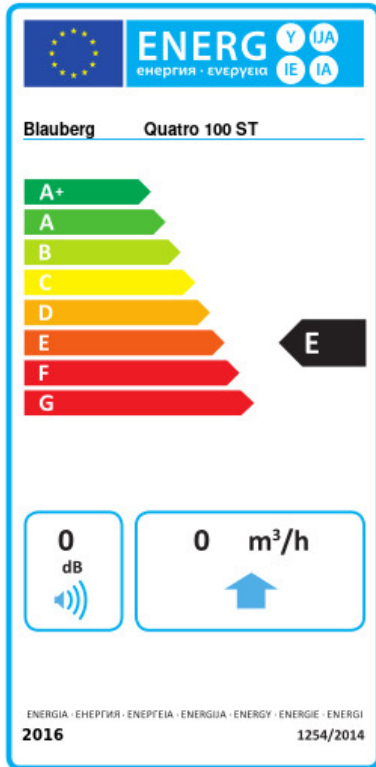

Trademark	Blaubeurg		
Model	Quatro 100 ST		
Specific energy consumption (SEC) (kWh/(m <sup>2</sup> /a))	Cold	Average	Warm
	0 B	0 E	0 F
Type of ventilation unit	Unidirectional		
Type of drive installed	Multi-speed		
Type of heat recovery system	None		
Maximum flow rate (m <sup>3</sup> /h)	0		
Electric power input (W)	0		
Reference flow rate (m <sup>3</sup> /s)	0		
Specific power input (SPI) (W/(m <sup>3</sup> /h))	0		
Control typology	Manual control		
Maximum external leakage rates (%)	0		
Sound power level (dB(A))	0		
Declared typology	RVU UVU		
The annual electricity consumption (AEC) (kWh/a)	Cold	Average	Warm
	0	0	0
The annual heating saved (AHS) (kWh/a)	Cold	Average	Warm
	0	0	0