



## Quatro 100 T

Extract fans with decorative front panel

- Maximum airflow: 88
- Sound pressure level LpA at 3 m: 33
- Motor type: AC
- Timer: Turn off timer


	Unit of measurement	Quatro 100 T
Connected air duct size	mm	100
Speed	-	1
Minimum supply voltage	V	220
Maximum supply voltage	V	240
Power supply frequency	Hz	50
Rated power	W	14
Unit current	A	0.085
Maximum airflow	m <sup>3</sup> /h	88
Sound pressure level LpA at 3 m	dB(A)	33
Ingress protection rating	-	IP34

### Dimensions

a	a1	b	c	Ø d	e
171	151	108	128	100	32



## Ecodesign

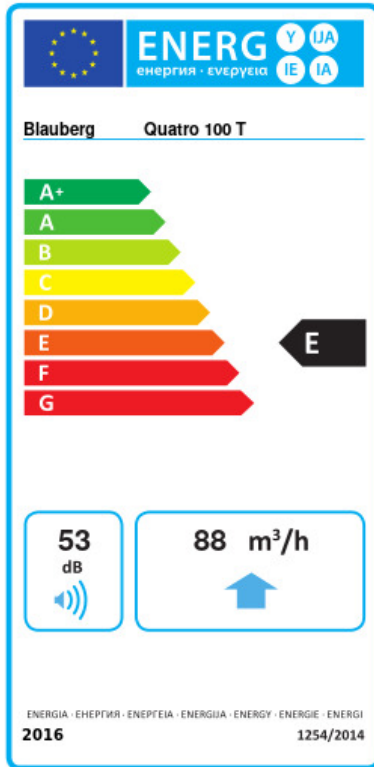

Trademark	Blaubeerg					
Model	Quatro 100 T					
Specific energy consumption (SEC) (kWh/(m²/a))	Cold		Average		Warm	
	-33.7	B	-15.8	E	-5.5	F
Type of ventilation unit	Unidirectional					
Type of drive installed	Multi-speed					
Type of heat recovery system	None					
Maximum flow rate (m³/h)	88					
Electric power input (W)	14					
Reference flow rate (m³/s)	0.017					
Specific power input (SPI) (W/(m³/h))	0.102					
Control typology	Clock control					
Maximum external leakage rates (%)	2.7					
Declared typology	RVU UVU					
Sound power level (dB(A))	53					
The annual electricity consumption (AEC) (kWh/a)	Cold		Average		Warm	
	119		119		119	
The annual heating saved (AHS) (kWh/a)	Cold		Average		Warm	
	3667		1874		848	