



Quatro 125 T

Extract fans with decorative front panel

- Maximum airflow: 167
- Sound pressure level LpA at 3 m: 34
- Motor type: AC
- Casing material: Plastic
- Timer: Turn off timer


	Unit of measurement	Quatro 125 T
Connected air duct size	mm	125
Speed	-	1
Minimum supply voltage	V	220
Maximum supply voltage	V	240
Power supply frequency	Hz	50
Rated power	W	16
Unit current	A	0.1
Maximum airflow	m ³ /h	167
Sound pressure level LpA at 3 m	dB(A)	34
Ingress protection rating	-	IP34

Dimensions

a	a1	b	c	Ø d	e
201	178	113	136	125	35



Ecodesign

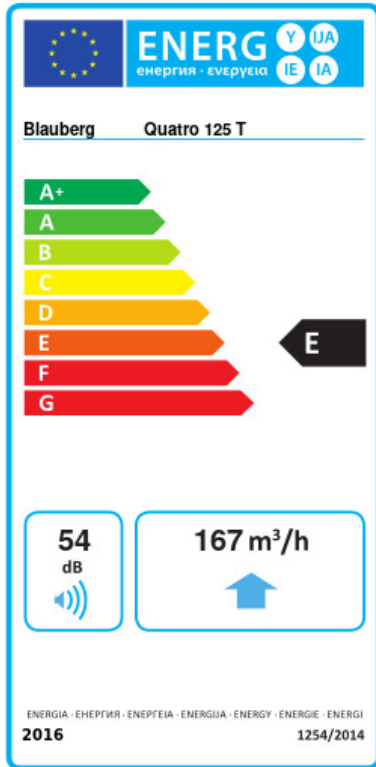

Trademark	Blaiberg		
Model	Quatro 125 T		
Specific energy consumption (SEC) (kWh/(m ² /a))	Cold	Average	Warm
	-34.9 A	-17 E	-6.7 F
Type of ventilation unit	Unidirectional		
Type of drive installed	Multi-speed		
Type of heat recovery system	None		
Maximum flow rate (m ³ /h)	167		
Electric power input (W)	16		
Reference flow rate (m ³ /s)	0.032		
Specific power input (SPI) (W/(m ³ /h))	0.062		
Control typology	Clock control		
Maximum external leakage rates (%)	2.7		
Sound power level (dB(A))	54		
Declared typology	RVU UVU		
The annual electricity consumption (AEC) (kWh/a)	Cold	Average	Warm
	71	71	71
The annual heating saved (AHS) (kWh/a)	Cold	Average	Warm
	3667	1874	848