


Reneo D 241-E S14



Heat and energy recovery air handling units

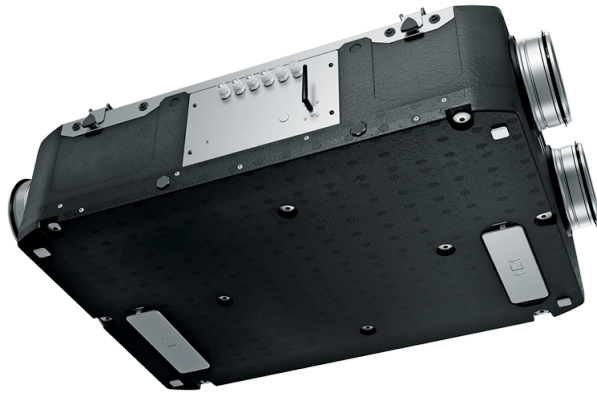

- Maximum airflow: 310
- Sound pressure level LpA at 3 m: 33
- Heat exchanger type: Counter flow
- Extract filter: Coarse > 60 %
- Supply filter: Coarse > 60 % (G4) (option: ePM1 60 % (F7))
- Sound insulation
- Motor type: EC
- Enthalpy heat exchanger
- Bypass: Manual
- Control: Wired control panel
- Casing material: EPP
- Humidity sensor: Optional
- CO2 sensor: Optional




| | Unit of measurement | Reneo D 241-E S14 |
|-----------------------------------|---------------------|---|
| Connected air duct size | mm | 160 |
| Speed | - | 0 |
| Phases | - | 1 |
| Minimum supply voltage | V | 230 |
| Maximum supply voltage | V | 230 |
| Power supply frequency | Hz | 50/60 |
| Rated power | W | 171 |
| Unit current | A | 1.34 |
| Maximum airflow | m ³ /h | 310 |
| Sound pressure level LpA at 3 m | dB(A) | 33 |
| Heat recovery efficiency, max | % | 81 |
| Heat exchanger type | - | Counter flow |
| Heat exchanger material | - | Enthalpy |
| Weight | kg | 15 |
| Extract filter | - | Coarse > 60 % |
| Supply filter | - | Coarse > 60 % (G4) (option: ePM1 60 % (F7)) |
| Transported air temperature (max) | °C | 45 |
| Ambient air temperature min | °C | 1 |
| Ambient air temperature max | °C | 40 |
| Ambient air humidity max | % | 60 |
| Ingress protection rating | - | IP22 |

| | | |
|--|---|------|
| Ingress protection rating of the drive | - | IP44 |
|--|---|------|

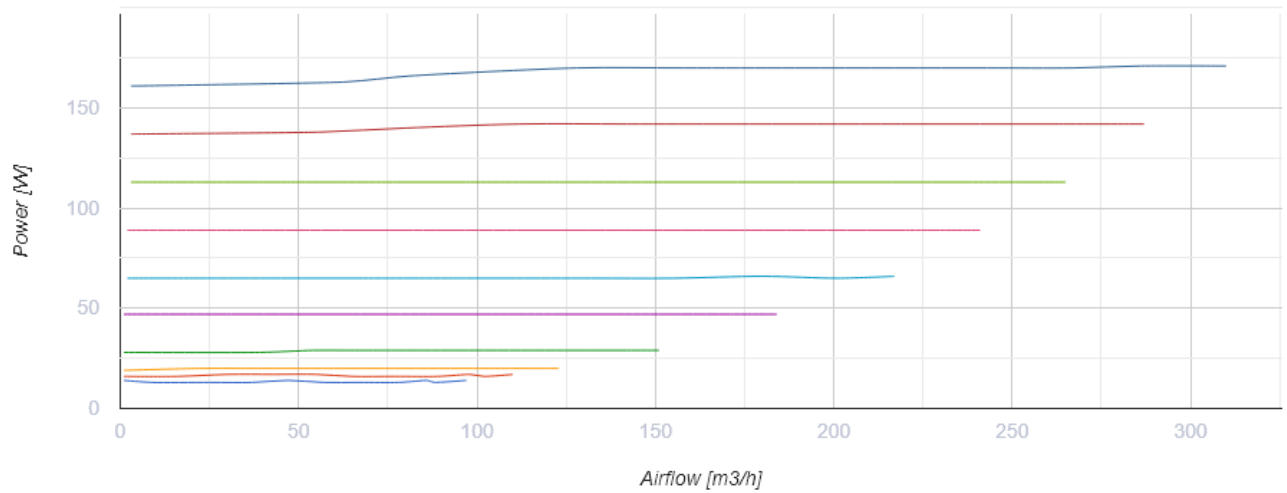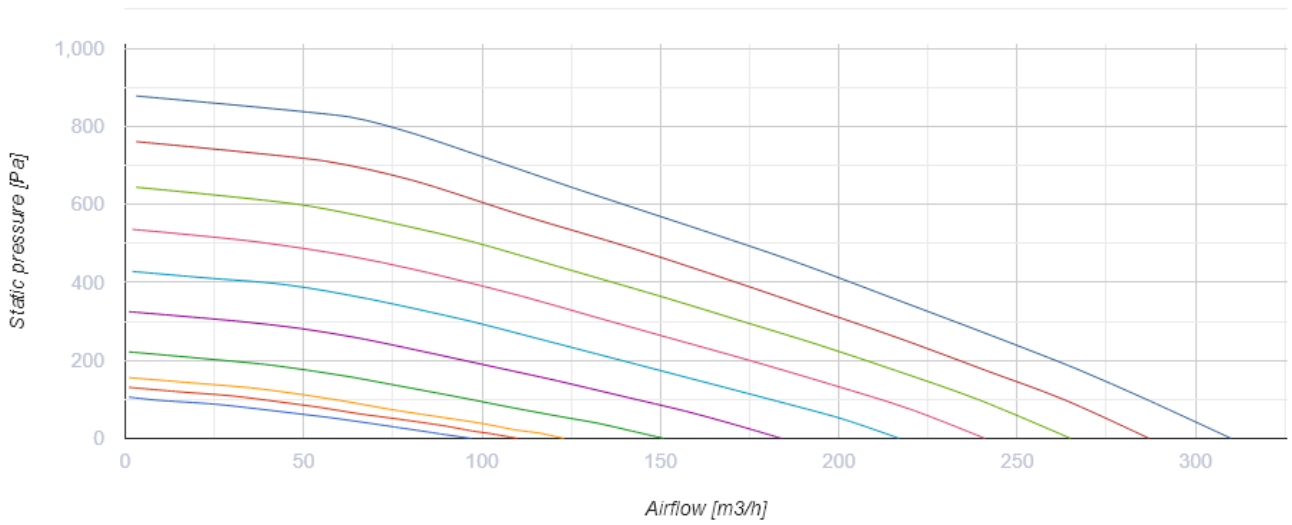


Dimensions

| Ø D | H | L | L1 | W / B | W1 / B1 |
|-----|-----|-----|-----|-------|---------|
| 160 | 272 | 930 | 627 | 640 | 300 |

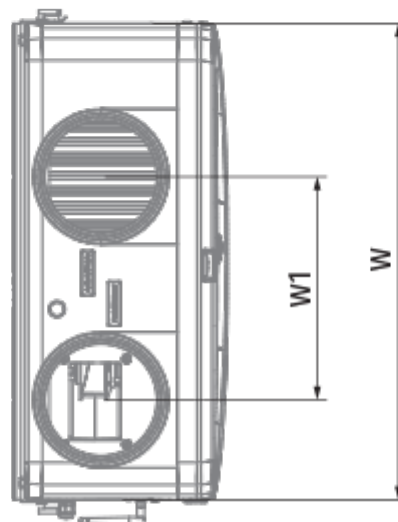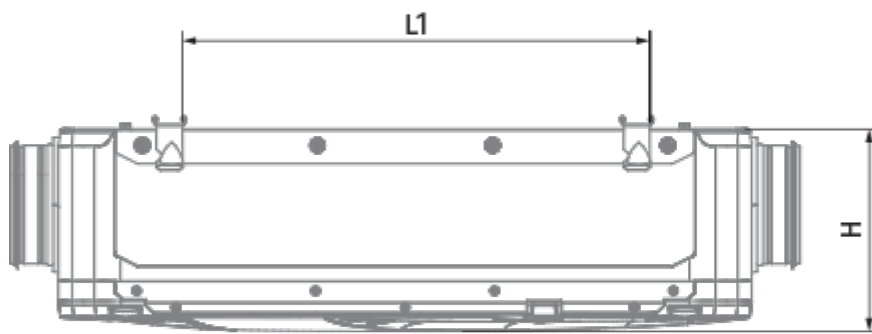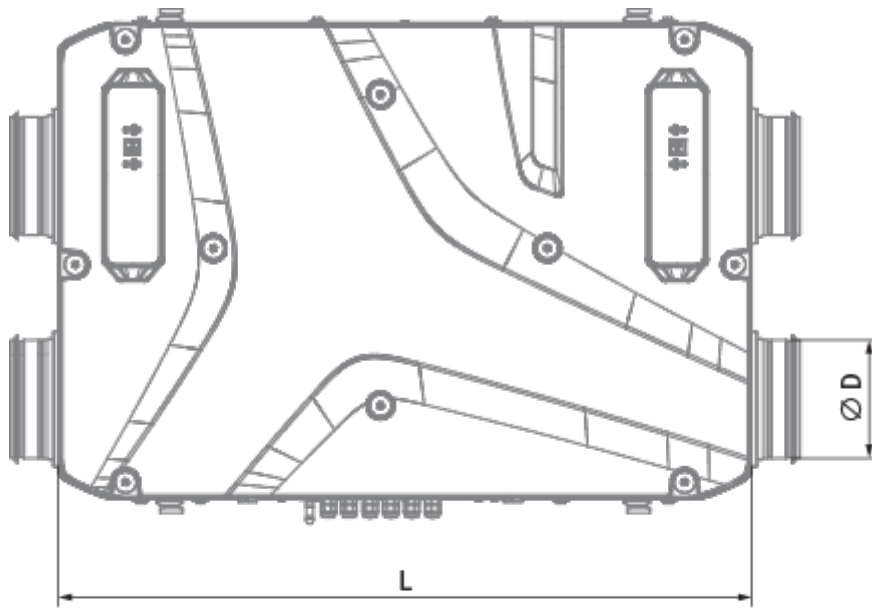

Ecodesign

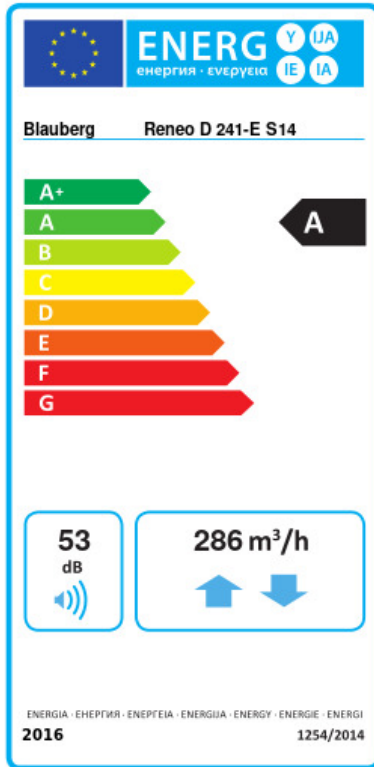


| | | | | |
|---|----------------------|---------|------|--------|
| Trademark | Blauberg | | | |
| Model | Reneo D 241-E S14 | | | |
| Specific energy consumption (SEC) (kWh/(m ² /a)) | Cold | Average | Warm | |
| | 73.2 | A+ | 37.9 | A 15 E |
| Type of ventilation unit | Bidirectional | | | |
| Type of drive installed | Variable speed | | | |
| Type of heat recovery system | Recuperative | | | |
| Thermal efficiency of heat recovery (%) | 69 | | | |
| Maximum flow rate (m ³ /h) | 286 | | | |
| Electric power input (W) | 171 | | | |
| Reference flow rate (m ³ /s) | 0.056 | | | |
| Reference pressure difference (Pa) | 50 | | | |
| Specific power input (SPI) (W/(m ³ /h)) | 0.323 | | | |
| Control typology | Local demand control | | | |
| Maximum internal leakage rates (%) | 2.7 | | | |
| Maximum external leakage rates (%) | 2.7 | | | |
| Sound power level (dB(A)) | 53 | | | |
| Declared typology | RVU BVU | | | |
| The annual electricity consumption (AEC) (kWh/a) | Cold | Average | Warm | |
| | 753 | 216 | 171 | |
| The annual heating saved (AHS) (kWh/a) | Cold | Average | Warm | |
| | 8331 | 4258 | 1926 | |


Accessories

Other accessories




| Name | Photo | Description |
|-----------------------------|-------|-----------------|
| FP 205x200x48 Coarse 90% G4 | | G4 panel filter |

| | | |
|---------------------------|---|-----------------|
| FP 205x200x48 ePM1 60% F7 |  | F7 panel filter |
|---------------------------|---|-----------------|




Other accessories

| Name | Photo | Description |
|--------------------------------|---|------------------|
| EP-Reneo D 181 |  | Decorative panel |


Other accessories

| Name | Photo | Description |
|----------------------|---|-----------------|
| FS2 |  | Humidity sensor |
| CD-1 |  | CO2 sensors |
| CD-2 |  | CO2 sensors |


Other accessories

| Name | Photo | Description |
|-----------------------------|---|---------------------------|
| SD 160/600 |  | Silencers for round ducts |
| SD 160/900 |  | Silencers for round ducts |
| SD 160/1200 |  | Silencers for round ducts |

Other accessories

| Name | Photo | Description |
|-------------------------|---|-----------------------------|
| VKA 160 |  | Air dampers for round ducts |

Other accessories

| Name | Photo | Description |
|------------------------------|---|--------------------|
| Belimo TF230 |  | Electric actuators |