



## Sileo Max 150 SH


High efficient exhaust fans with stylish design for new enhanced comfort

- Maximum airflow: 370
- Sound pressure level LpA at 3 m: 38
- Motor type: AC
- Backdraft protection: Backdraft damper
- Pull cord
- Humidity sensor
- Timer: Turn off timer

|                                 | Unit of measurement | Sileo Max 150 SH |     |
|---------------------------------|---------------------|------------------|-----|
| Connected air duct size         | mm                  | 150              |     |
| Speed                           | -                   | 2                |     |
| Minimum supply voltage          | V                   | 220              |     |
| Maximum supply voltage          | V                   | 240              |     |
| Power supply frequency          | Hz                  | 50               |     |
| Rated power                     | W                   | 19               | 22  |
| Unit current                    | A                   | 0.09             | 0.1 |
| Maximum airflow                 | m <sup>3</sup> /h   | 280              | 370 |
| Sound pressure level LpA at 3 m | dB(A)               | 32               | 38  |
| Weight                          | kg                  | 0                |     |
| Ambient air temperature min     | °C                  | 0                |     |
| Ambient air temperature max     | °C                  | 0                |     |
| Ingress protection rating       | -                   | IP45             |     |

### Dimensions

| a   | b   | c  | Ø d | e  |
|-----|-----|----|-----|----|
| 190 | 214 | 98 | 148 | 32 |

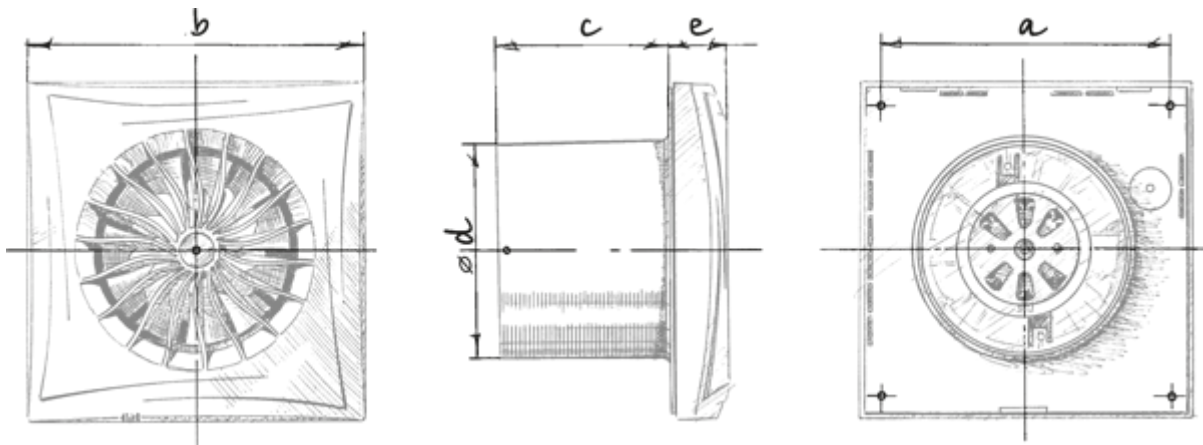

## Ecodesign



|   |                      |    |         |   |       |   |
|---|----------------------|----|---------|---|-------|---|
| Trademark   | Blauberg             |    |         |   |       |   |
| Model   | Sileo Max 150 SH     |    |         |   |       |   |
| Specific energy consumption (SEC) (kWh/(m <sup>2</sup> /a)) | Cold                 |    | Average |   | Warm  |   |
|   | -54.1                | A+ | -27     | B | -11.5 | E |
| Type of ventilation unit                                    | Unidirectional       |    |         |   |       |   |
| Type of drive installed                                     | 2-speed              |    |         |   |       |   |
| Type of heat recovery system                                | None                 |    |         |   |       |   |
| Maximum flow rate (m <sup>3</sup> /h)                       | 370                  |    |         |   |       |   |
| Electric power input (W)                                    | 22                   |    |         |   |       |   |
| Reference flow rate (m <sup>3</sup> /s)                     | 0.078                |    |         |   |       |   |
| Specific power input (SPI) (W/(m <sup>3</sup> /h))          | 0.068                |    |         |   |       |   |
| Control typology  | Local demand control |    |         |   |       |   |
| Maximum external leakage rates (%)                          | 2.7                  |    |         |   |       |   |
| Declared typology   | RVU UVU              |    |         |   |       |   |
| Sound power level (dB(A))                                   | 52                   |    |         |   |       |   |
| The annual electricity consumption (AEC) (kWh/a)            | Cold                 |    | Average |   | Warm  |   |
|   | 51                   |    | 51      |   | 51    |   |
| The annual heating saved (AHS) (kWh/a)                      | Cold                 |    | Average |   | Warm  |   |
|   | 5536                 |    | 2830    |   | 1280  |   |