




# Tower-A 350 4E

Roof axial fans

- Maximum airflow: 2500
- Sound pressure level LpA at 3 m: 62
- Motor type: AC
- Impeller type: Axial
- Casing material: Coated steel

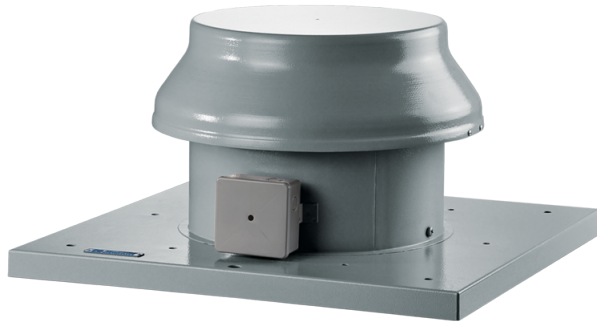


	Unit of measurement	Tower-A 350 4E
Connected air duct size	mm	350
Speed	-	1
Minimum supply voltage	V	220
Maximum supply voltage	V	240
Power supply frequency	Hz	50/60
Rated power	W	140
Unit current	A	0.65
Maximum airflow	m <sup>3</sup> /h	2500
Sound pressure level LpA at 3 m	dB(A)	62
Weight	kg	12
Transported air temperature (max)	°C	60
Transported air temperature (min)	°C	-30
Ingress protection rating	-	IP24
Ingress protection rating of the drive	-	IP44

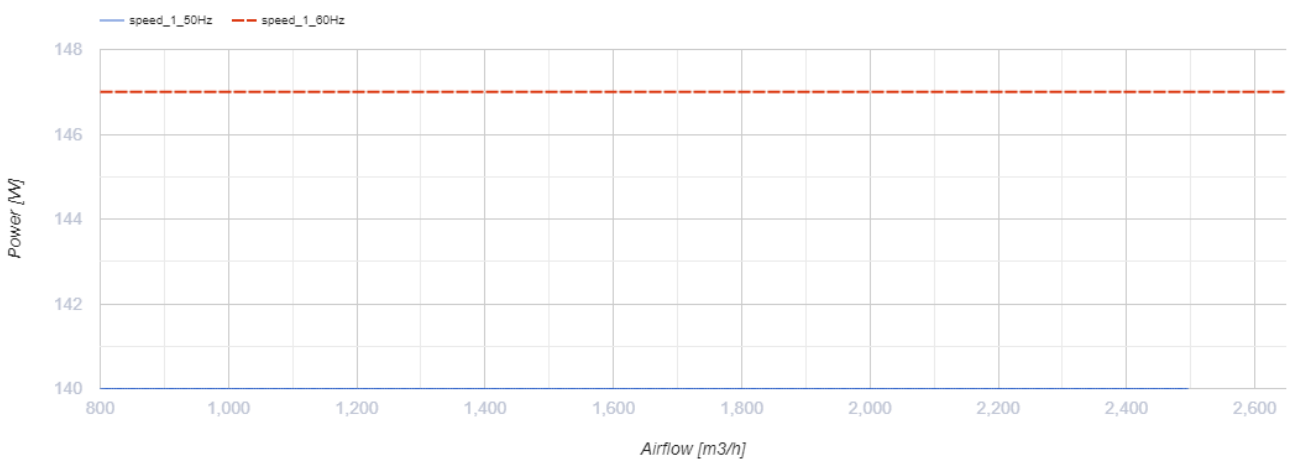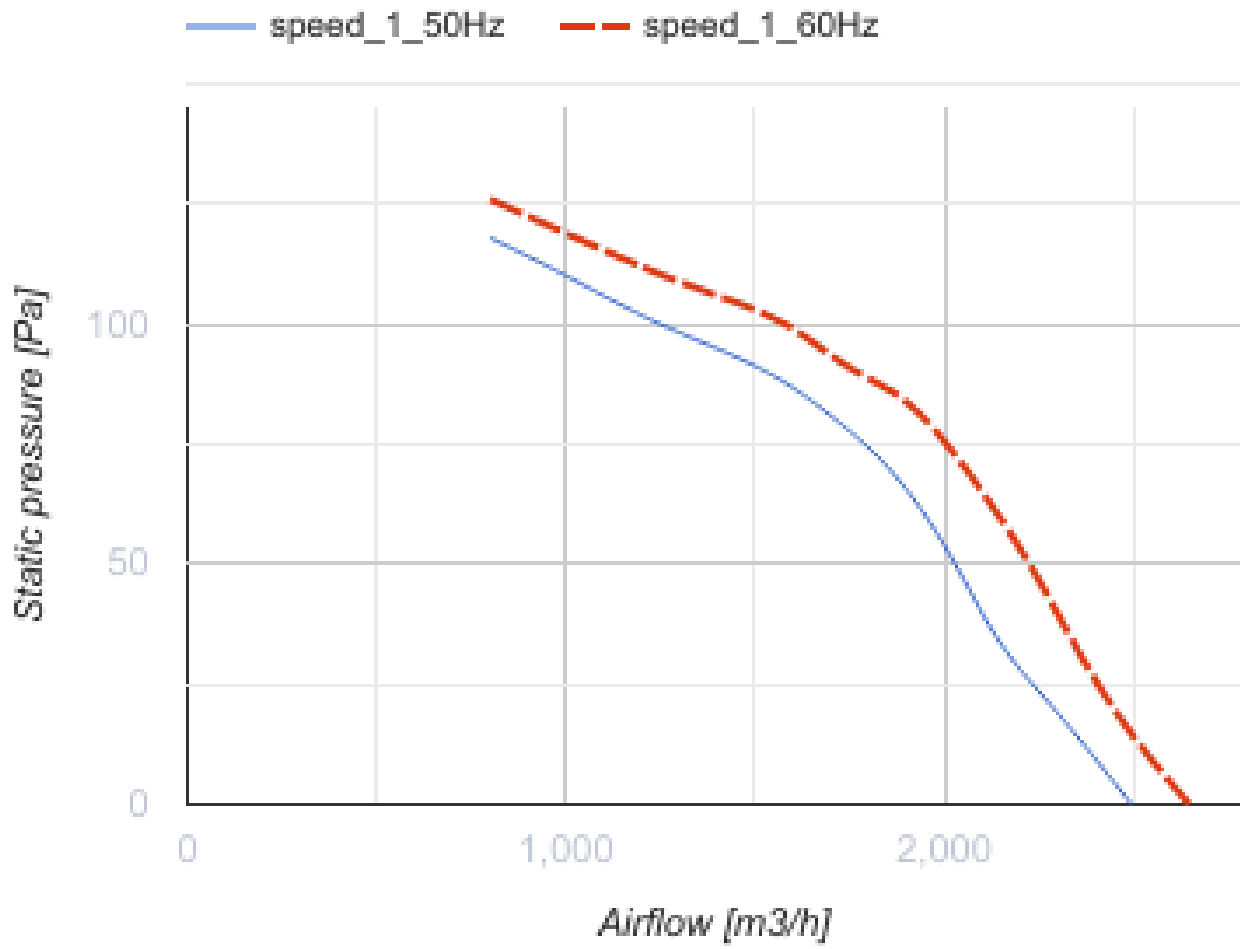

## Dimensions

$\varnothing D$	$\varnothing D1$	H	L	L1
364	555	350	655	535

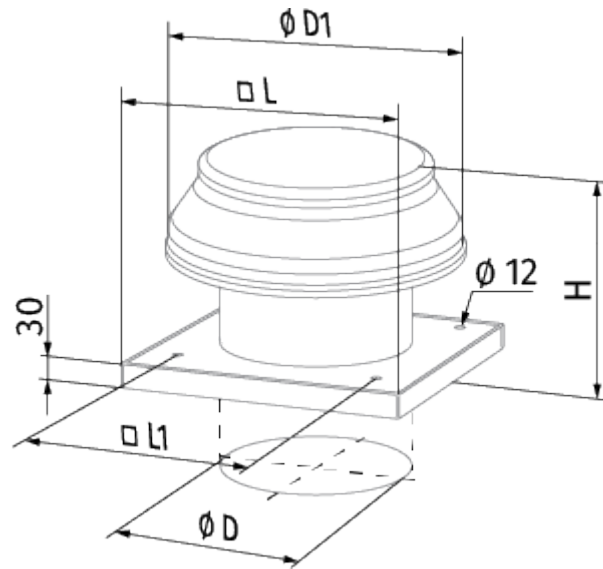

## Ecodesign

Trademark	Blauberg
Model	Tower-A 350 4E
Type of ventilation unit	Unidirectional
Type of drive installed	External MSD or VSD
Type of heat recovery system	None
Nominal flow rate (m <sup>3</sup> /s)	0.477
Nominal external pressure (Pa)	80
Maximum external leakage rates (%)	2.7
Static efficiency (%)	29.9
Declared typology	NRVU UVU
Sound power level (dB(A))	82
Effective electric power input (kW)	0.13

## Accessories

### Other accessories

Name	Photo	Description
<a href="#">CDT E1.8</a>		Thyristor speed controller