



Tower-AL 200

Roof axial fans with aluminium impellers

- Maximum airflow: 405
- Sound pressure level LpA at 3 m: 32
- Motor type: AC
- Impeller type: Axial
- Casing material: Coated steel

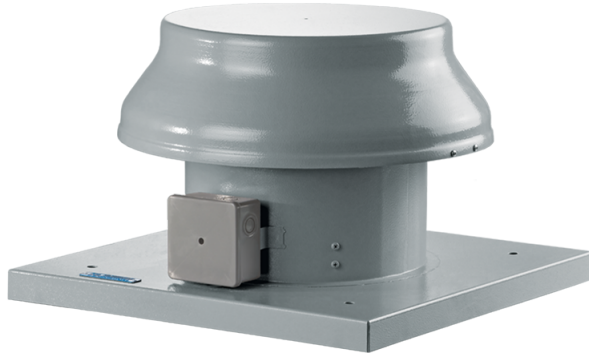

	Unit of measurement	Tower-AL 200
Connected air duct size	mm	200
Speed	-	1
Minimum supply voltage	V	220
Maximum supply voltage	V	240
Power supply frequency	Hz	50/60
Rated power	W	43
Unit current	A	0.28
Maximum airflow	m ³ /h	405
Sound pressure level LpA at 3 m	dB(A)	32
Weight	kg	6.1
Transported air temperature (max)	°C	40
Ingress protection rating	-	IP24
Ingress protection rating of the drive	-	IP44

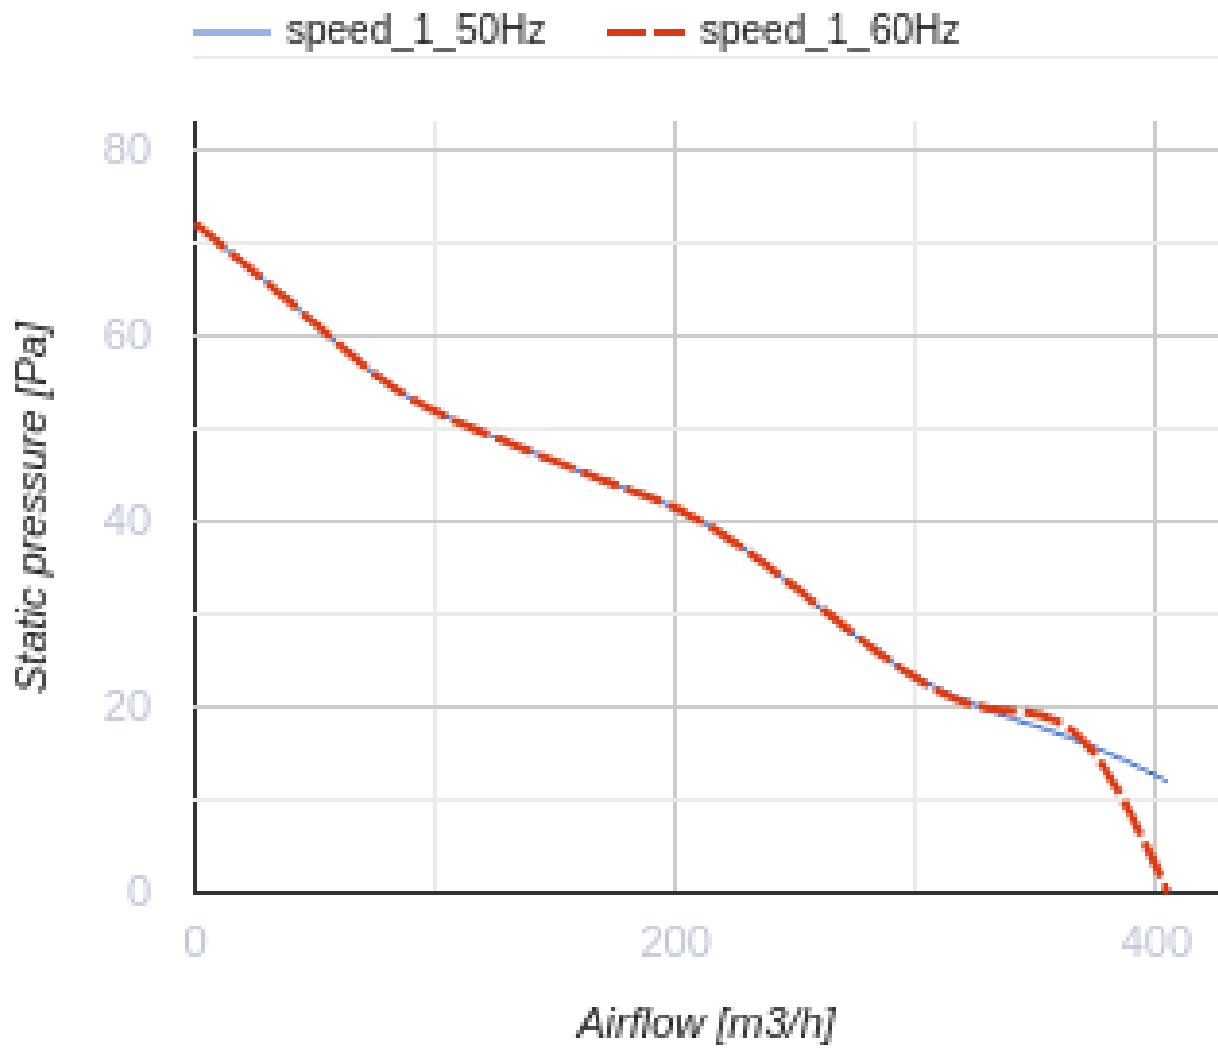


Dimensions

ØD	ØD1	H	L	L1
208	345	280	425	330



Ecodesign

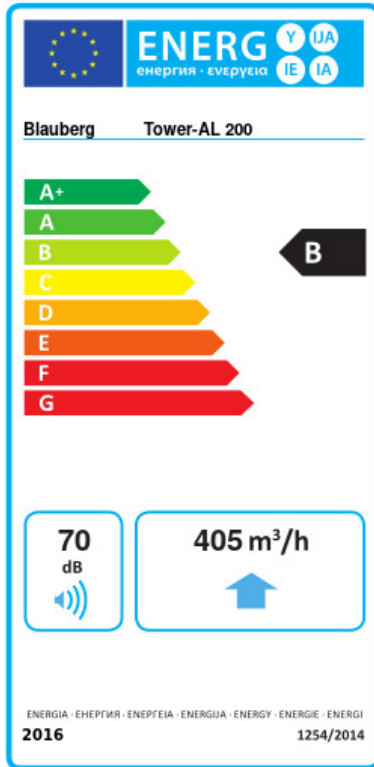

Trademark	Blaubeerg					
Model	Tower-AL 200					
Specific energy consumption (SEC) (kWh/(m ² /a))	Cold	Average		Warm		
	-53.8	A+	-26.7	B	-11.2	E
Type of ventilation unit	Unidirectional					
Type of drive installed	Variable speed					
Type of heat recovery system	None					
Maximum flow rate (m ³ /h)	405					
Electric power input (W)	43					
Reference flow rate (m ³ /s)	0.079					
Specific power input (SPI) (W/(m ³ /h))	0.121					
Control typology	Local demand control					
Maximum external leakage rates (%)	2.7					
Declared typology	RVU UVU					
Sound power level (dB(A))	70					
The annual electricity consumption (AEC) (kWh/a)	Cold	Average		Warm		
	64	64		64		
The annual heating saved (AHS) (kWh/a)	Cold	Average		Warm		
	5536	2830		1280		

Accessories

Other accessories

Name	Photo	Description
CDT E1.8		Thyristor speed controller