



Tower-H EC 560

Roof centrifugal fans with horizontal air discharge with EC-motors

- Sound pressure level LpA at 3 m: 69
- Impeller type: Centrifugal impeller with backward curved blades
- Casing material: Coated steel


	Unit of measurement	Tower-H EC 560
Phases	-	3
Minimum supply voltage	V	400
Maximum supply voltage	V	400
Power supply frequency	Hz	50/60
Rated power	W	2412
Unit current	A	3.83
Maximum airflow	m ³ /h	13640
Rotation speed at 50hz	-	1540
Sound pressure level LpA at 3 m	dB(A)	69
Weight	kg	71
Transported air temperature (max)	°C	60
Transported air temperature (min)	°C	-25
Ingress protection rating	-	IPX4
Ingress protection rating of the drive	-	IP54
Impeller material	-	Plastic
Article	-	8017698

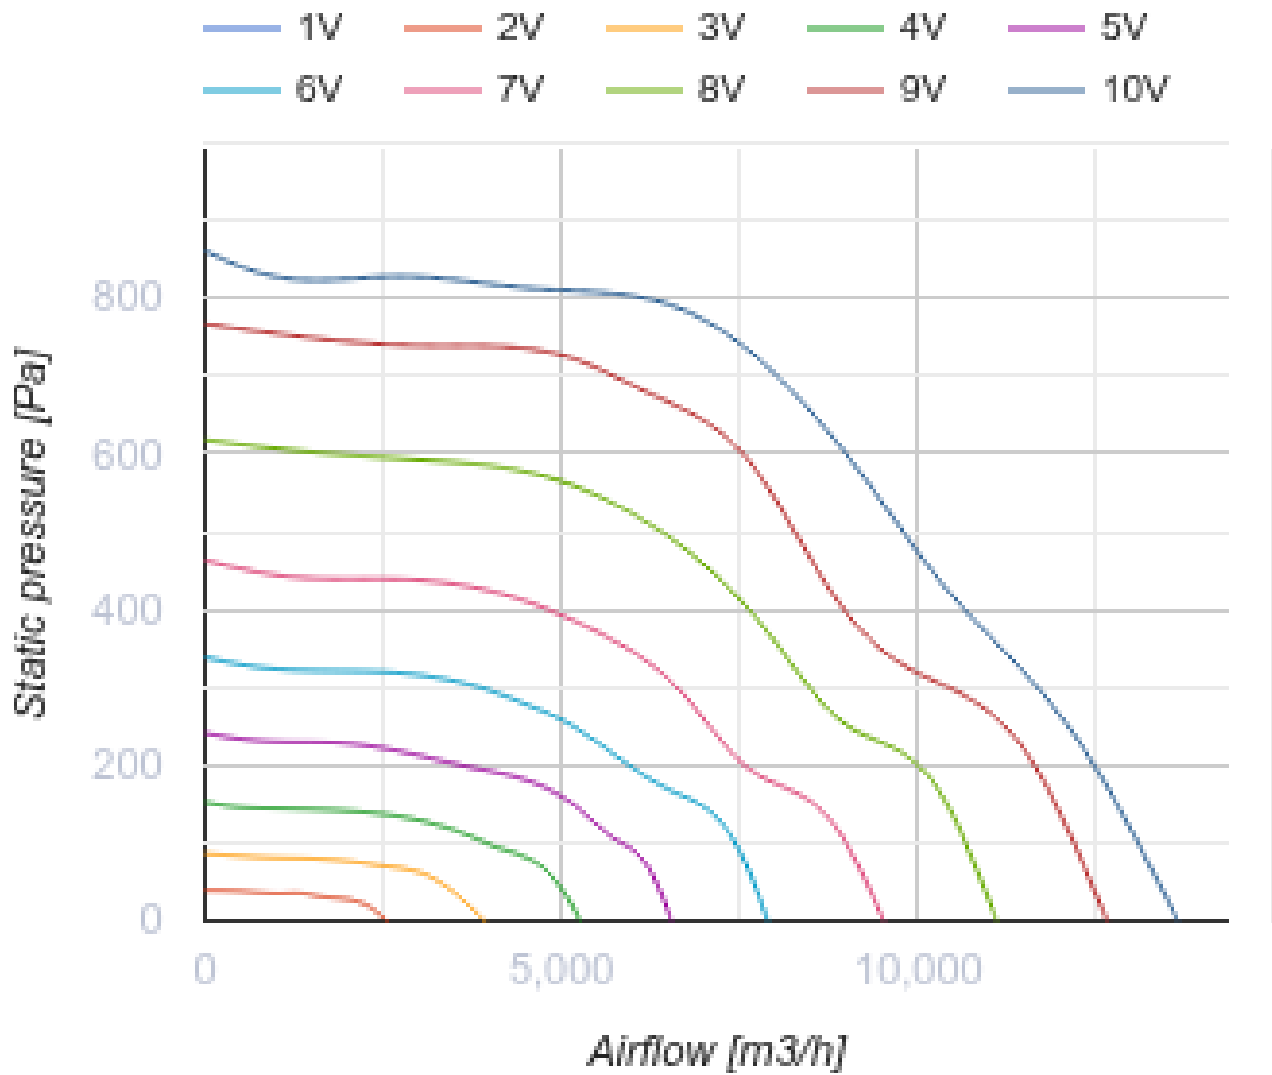

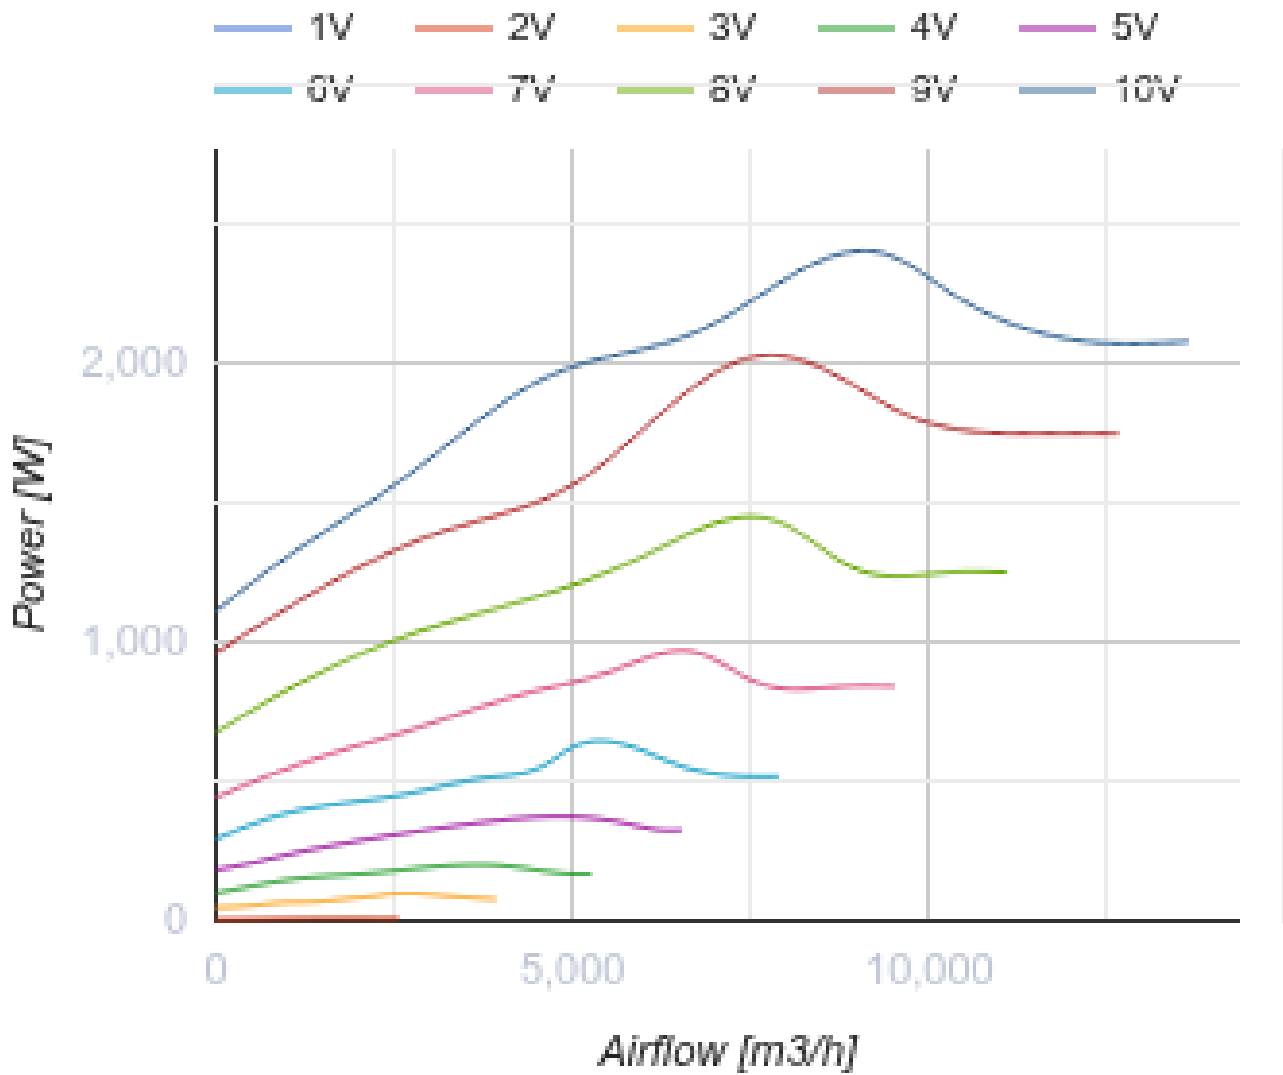

Dimensions

ØD	Ød	H	L	L1	L2
605	11	489	895	750	900

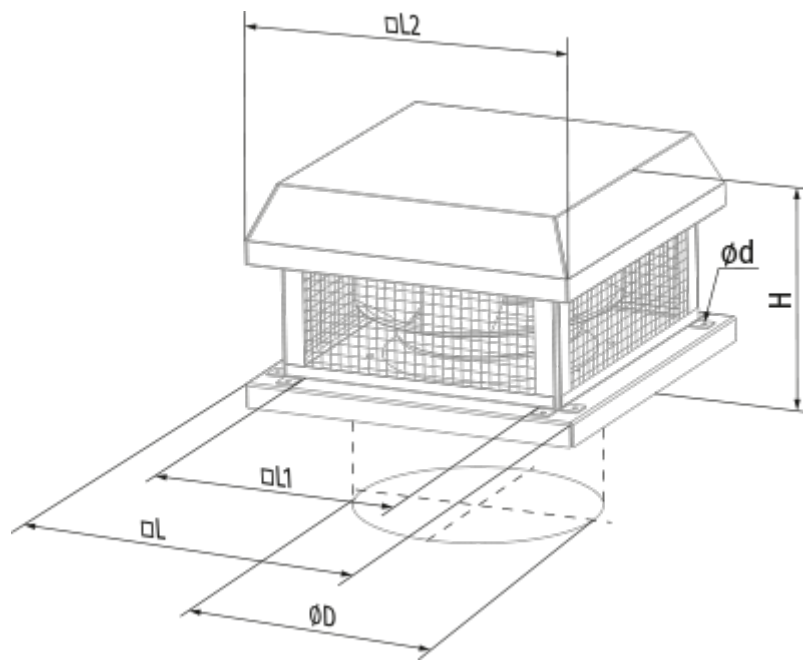


Ecodesign

Trademark	Blauberg
Model	Tower-H EC 560
Type of ventilation unit	Unidirectional
Type of drive installed	Integrated VSD
Type of heat recovery system	None
Nominal external pressure (Pa)	499
Maximum external leakage rates (%)	2.7
Static efficiency (%)	62.9
Declared typology	NRVU UVU
Sound power level (dB(A))	85
Effective electric power input (kW)	2.15

Accessories

EC motors regulators

Name	Photo	Description
CDT E/0-10		Speed control for EC motors