

Turbo 200 W1

Inline mixed-flow fans



- Maximum airflow: 1040
- Sound pressure level LpA at 3 m: 45
- Motor type: AC
- Impeller type: Mixed-flow
- Casing material: Plastic
- Installation in any position
- Cable with mains plug


	Unit of measurement	Turbo 200 W1	
Connected air duct size	mm	200	
Speed	-	2	
Minimum supply voltage	V	230	
Maximum supply voltage	V	230	
Power supply frequency	Hz	50/60	
Rated power	W	76	108
Unit current	A	0.34	0.48
Maximum airflow	m ³ /h	830	1040
Sound pressure level LpA at 3 m	dB(A)	39	45
Weight	kg	3.95	
Transported air temperature (max)	°C	60	
Ingress protection rating	-	IPX4	
Ingress protection rating of the drive	-	IPX4	

Dimensions

ØD	ØD1	B	H	L
199	209	239	261	295.5



Ecodesign

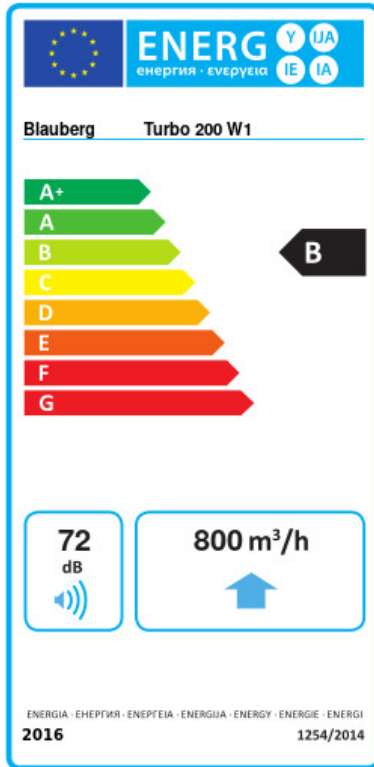


Trademark	Blauberg			
Model	Turbo 200 W1			
Specific energy consumption (SEC) (kWh/(m ² /a))	Cold	Average	Warm	
	-53.6	A+	-26.5	B -11 E
Type of ventilation unit	Unidirectional			
Type of drive installed	Variable speed			
Type of heat recovery system	None			
Maximum flow rate (m ³ /h)	800			
Electric power input (W)	108			
Reference flow rate (m ³ /s)	0.156			
Reference pressure difference (Pa)	50			
Specific power input (SPI) (W/(m ³ /h))	0.136			
Control typology	Local demand control			
Maximum external leakage rates (%)	2.7			
Sound power level (dB(A))	72			
Declared typology	RVU UVU			
The annual electricity consumption (AEC) (kWh/a)	Cold	Average	Warm	
	72	72	72	
The annual heating saved (AHS) (kWh/a)	Cold	Average	Warm	
	5536	2830	1280	


Accessories

Humidity sensors



Name	Photo	Description
IRSE / IRSI 1.5		Sensors
HSE / HSI 1.5		Sensors
TE / TI 1.5		Timers

LSE / LSI 1.5		Sensors
-------------------------------	---	---------


Speed control switches

Name	Photo	Description
CDP-2/10		Multi-speed switch

Thyristor speed controllers

Name	Photo	Description
CDT E1.8		Thyristor speed controller
CDT E0.5		Thyristor speed controller

Temperature controllers

Name	Photo	Description
MLCD E2		Room temperature regulator